



400 SERIES INSTALLATION MANUAL

GPS 400, GNC 420, and GNS 430



(GNS 430 Shown)



GARMIN International, Inc.
1200 E. 151st Street
Olathe, KS 66062 USA

190-00140-02, Revision J
February 2001

© Copyright 1998-2001
 GARMIN Corporation
 All Rights Reserved

Except as expressly provided below, no part of this manual may be reproduced, copied, transmitted, disseminated, downloaded or stored in any storage medium, for any purpose without the express prior written consent of GARMIN Corporation. GARMIN Corporation hereby grants permission to download a single copy of this manual and of any revision to this manual onto a hard drive or other electronic storage medium to be viewed and to print one copy of this manual or of any revision hereto, provided that such electronic or printed copy of this manual or revision must contain the complete text of this copyright notice and provided further that any unauthorized commercial distribution of this manual or any revision hereto is strictly prohibited.

GARMIN International, Inc.
 1200 E. 151st Street
 Olathe, KS 66062 USA
 Telephone: 913-397-8200, Dealer Line: 1-800-800-1420
 Web Site Address: www.garmin.com

INFORMATION SUBJECT TO EXPORT CONTROL LAWS

This document may contain information which is subject to the Export Administration Regulations ("EAR") issued by the United States Department of Commerce (15 CFR, Chapter VII, Subchapter C) and which may not be exported, released, or disclosed to foreign nationals inside or outside of the United States without first obtaining an export license. A violation of the EAR may be subject to a penalty of up to 10 years imprisonment and a fine of up to \$1,000,000 under Section 2410 of the Export Administration Act of 1979. Include this notice with any reproduced portion of this document.

RECORD OF REVISIONS

Revision	Revision Date	Description	ECO #	Insertion Date	By
A	6/19/98	Initial Release	----		
B	10/22/98	General update	9891		
C	11/11/98	Add 18 AWG pin positioner and insertion/ extraction tools. Add King Serial DME tuning interface description.	10008		
D	3/18/99	Add GNC 420, GPS 400, ARINC 429, GPS King Serial OBI, RS-232 Fuel/Air Data Inputs	10665		
E	6/25/99	Reflect changes to configuration pages, Misc corrections	11243		
F	10/13/99	Add interface to BF Goodrich Stormscope and Skywatch and Ryan TCAD	11871		
G	4/27/00	Update installation accessory kits	13205		
H	9/1/00	Add unit versions with 14/28 volt transmitter. Update configuration pages.	14026		
J	2/22/01	Update configuration pages.	15207		

LIST OF EFFECTIVE PAGES

Page	Rev.	Page	Rev.	Page	Rev.	Page	Rev.	Page	Rev.	Page	Rev.	Page	Rev.
A.....	J	3-3.....	J	4-4.....	J	4-19.....	J	4-47.....	J	5-4.....	J	A-3.....	J
i.....	J	3-4.....	J	4-5.....	J	4-20.....	J	4-49.....	J	5-5.....	J	A-4.....	J
ii.....	J	3-5.....	J	4-6.....	J	4-21.....	J	4-51.....	J	5-6.....	J	A-5.....	J
1-1.....	J	3-6.....	J	4-7.....	J	4-23.....	J	4-53.....	J	5-7.....	J	A-6.....	J
1-2.....	J	3-7.....	J	4-8.....	J	4-25.....	J	4-55.....	J	5-8.....	J	B-1.....	J
1-3.....	J	3-9.....	J	4-9.....	J	4-27.....	J	4-57.....	J	5-9.....	J	B-2.....	J
1-4.....	J	3-11.....	J	4-10.....	J	4-29.....	J	4-59.....	J	5-10.....	J	B-3.....	J
1-5.....	J	3-13.....	J	4-11.....	J	4-31.....	J	4-61.....	J	5-11.....	J	B-4.....	J
1-6.....	J	3-15.....	J	4-12.....	J	4-33.....	J	4-63.....	J	5-12.....	J	B-5.....	J
2-1.....	J	3-17.....	J	4-13.....	J	4-35.....	J	4-65.....	J	5-13.....	J	B-6.....	J
2-2.....	J	3-19.....	J	4-14.....	J	4-37.....	J	4-67.....	J	5-14.....	J	C-1.....	J
2-3.....	J	3-21.....	J	4-15.....	J	4-39.....	J	4-69.....	J	5-15.....	J	C-2.....	J
2-4.....	J	4-1.....	J	4-16.....	J	4-41.....	J	5-1.....	J	5-16.....	J	C-3.....	J
3-1.....	J	4-2.....	J	4-17.....	J	4-43.....	J	5-2.....	J	A-1.....	J	C-4.....	J
3-2.....	J	4-3.....	J	4-18.....	J	4-45.....	J	5-3.....	J	A-2.....	J	D-1.....	J

TABLE OF CONTENTS

1. GENERAL DESCRIPTION	
1.1 INTRODUCTION	1-1
1.2 EQUIPMENT DESCRIPTION	1-1
1.3 TECHNICAL SPECIFICATIONS	1-1
1.4 LICENSE REQUIREMENTS	1-6
1.5 CERTIFICATION	1-6
1.6 LIMITED WARRANTY	1-6
2. INSTALLATION	
2.1 INTRODUCTION	2-1
2.2 ANTENNA CONSIDERATIONS	2-1
2.3 RACK CONSIDERATIONS	2-3
2.4 CABLING AND WIRING	2-3
2.5 COOLING AIR	2-3
2.6 MINIMUM INSTALLATION REQUIREMENTS	2-3
3. INSTALLATION PROCEDURE	
3.1 UNIT AND ACCESSORIES	3-1
3.2 DATA BASE OPTIONS	3-3
3.3 MISCELLANEOUS OPTIONS	3-3
3.4 INSTALLATION ACCESSORIES REQUIRED BUT NOT PROVIDED	3-3
3.5 ANTENNA INSTALLATION	3-3
3.6 CABLE INSTALLATION	3-4
3.7 RACK INSTALLATION	3-5
3.8 400 SERIES UNIT INSERTION AND REMOVAL	3-6
3.9 COM ANTENNA INSTALLATION CHECK (GNC 420 AND GNS 430)	3-6
3.10 GA 56 ANTENNA INSTALLATION DRAWING	3-7
3.11 MOUNTING RACK DIMENSIONS	3-9
3.12 MOUNTING RACK INSTALLATION	3-15
3.13 RECOMMENDED PANEL CUTOUT DIMENSIONS	3-21
4. SYSTEM INTERCONNECTS	
4.1 PIN FUNCTION LIST	4-1
4.2 POWER, LIGHTING, AND ANTENNAS	4-5
4.3 ALTIMETER	4-6
4.4 MAIN INDICATOR	4-7
4.5 ANNUNCIATORS/SWITCHES	4-9
4.6 SERIAL DATA	4-11
4.7 COM/VOR/ILS AUDIO (GNC 420 AND GNS 430 ONLY)	4-14
4.8 VOR/ILS INDICATOR (GNS 430 ONLY)	4-16
4.9 RMI/OBI	4-18
4.10 DME TUNING (GNS 430 ONLY)	4-19
4.11 400 SERIES INTERCONNECTS	4-21
5. POST INSTALLATION CONFIGURATION & CHECKOUT PROCEDURE	
5.1 CONFIGURATION MODE OPERATIONS	5-1
5.2 INSTALLATION CONFIGURATION PAGES	5-1
5.3 ADDITIONAL GROUND TESTS	5-14
Appendix A. CERTIFICATION DOCUMENTS	
A.1 CONTINUED AIRWORTHINESS	A-1
A.2 ENVIRONMENTAL QUALIFICATION FORM—GNS 430	A-3
A.3 ENVIRONMENTAL QUALIFICATION FORM—GNC 420	A-4
A.4 ENVIRONMENTAL QUALIFICATION FORM—GPS 400	A-5
A.5 ENVIRONMENTAL QUALIFICATION FORM—GA 56	A-6
Appendix B. STC PERMISSION	B-1
Appendix C. 400 SERIES RS-232 AVIATION DATA FORMAT	C-1
Appendix D. 400 SERIES RS-232 FUEL/AIR DATA INPUT FORMAT	D-1

LIST OF FIGURES

FIGURE 2-1. GPS ANTENNA AND UNIT INSTALLATION CONSIDERATIONS	2-2
FIGURE 3-1. COAXIAL CABLE INSTALLATION	3-4
FIGURE 3-2. GA 56 ANTENNA INSTALLATION DRAWING	3-7
FIGURE 3-3. GNS 430 MOUNTING RACK DIMENSIONS	3-9
FIGURE 3-4. GNC 420 MOUNTING RACK DIMENSIONS	3-11
FIGURE 3-5. GPS 400 MOUNTING RACK DIMENSIONS	3-13
FIGURE 3-6. GNS 430 MOUNTING RACK INSTALLATION	3-15
FIGURE 3-7. GNC 420 MOUNTING RACK INSTALLATION	3-17
FIGURE 3-8. GPS 400 MOUNTING RACK INSTALLATION	3-19
FIGURE 3-9. 400 SERIES RECOMMENDED PANEL CUTOUT DIMENSIONS	3-21
FIGURE 4-1. 400 SERIES SYSTEM INTERFACE DIAGRAM	4-21
FIGURE 4-2. GNS 430 TYPICAL INSTALLATION	4-23
FIGURE 4-3. GNC 420 TYPICAL INSTALLATION	4-25
FIGURE 4-4. GPS 400 TYPICAL INSTALLATION	4-27
FIGURE 4-5. POWER, LIGHTING, AND ANTENNAS INTERCONNECT	4-29
FIGURE 4-6. ALTIMETER INTERCONNECT	4-31
FIGURE 4-7. MAIN INDICATOR INTERCONNECT	4-33
FIGURE 4-8. KI 209A MAIN INDICATOR INTERCONNECT	4-35
FIGURE 4-9. KI 208A MAIN INDICATOR INTERCONNECT	4-37
FIGURE 4-10. ANNUNCIATORS/SWITCHES INTERCONNECT	4-39
FIGURE 4-11. RS-232 SERIAL DATA INTERCONNECT	4-41
FIGURE 4-12. ARINC 429 EFIS INTERCONNECT	4-43
FIGURE 4-13. ARINC 429 SANDEL EHSI INTERCONN. (1 400 SERIES UNIT, 1 SANDEL SN3308)	4-45
FIGURE 4-14. ARINC 429 SANDEL EHSI INTERCONNECT (2 GNS 430, 1 SANDEL SN3308)	4-47
FIGURE 4-15. ARINC 429 SANDEL EHSI INTERCONNECT (2 GNS 430, 2 SANDEL SN3308)	4-49
FIGURE 4-16. ARINC 429 AIR DATA/IRU/AHRS INTERCONNECT	4-51
FIGURE 4-17. ARINC 429 FLIGHT CONTROL INTERCONNECT	4-53
FIGURE 4-18. WEATHER, TRAFFIC, AND TERRAIN INTERCONNECT	4-55
FIGURE 4-19. AUDIO PANEL INTERCONNECT	4-57
FIGURE 4-20. VOR/ILS INDICATOR INTERCONNECT	4-59
FIGURE 4-21. RMI/OBI INTERCONNECT	4-61
FIGURE 4-22. KING SERIAL PANEL DME TUNING INTERCONNECT	4-63
FIGURE 4-23. KING SERIAL REMOTE DME TUNING INTERCONNECT	4-65
FIGURE 4-24. PARALLEL 2 OF 5 DME TUNING INTERCONNECT	4-67
FIGURE 4-25. PARALLEL BCD/SLIP CODE DME TUNING INTERCONNECT	4-69
FIGURE 5-1. MAIN ARINC 429 CONFIG PAGE	5-1
FIGURE 5-2. MAIN RS232 CONFIG PAGE	5-3
FIGURE 5-3. MAIN INPUTS 1 PAGE	5-4
FIGURE 5-4. MAIN INPUTS 2 PAGE	5-4
FIGURE 5-5. INSTRUMENT PANEL SELF TEST PAGE	5-4
FIGURE 5-6. MAIN LIGHTING PAGE	5-5
FIGURE 5-7. DISPLAY PAGE (AUX GROUP)	5-5
FIGURE 5-8. DATE/TIME SETUP PAGE	5-6
FIGURE 5-9. MAIN DISCRETE INPUTS PAGE	5-6
FIGURE 5-10. MAIN DISCRETE OUTPUTS PAGE	5-7
FIGURE 5-11. MAIN CDI/OBS CONFIG PAGE	5-7
FIGURE 5-12. COM SETUP PAGE (GNC 420 AND GNS 430 ONLY)	5-9
FIGURE 5-13. VOR DISCRETE INPUTS PAGE (GNS 430 ONLY)	5-10
FIGURE 5-14. VOR/LOC/GS CDI PAGE (GNS 430 ONLY)	5-10
FIGURE 5-15. VOR/LOC/GS ARINC 429 CONFIG PAGE (GNS 430 ONLY)	5-11
FIGURE 5-16. STORMSCOPE CONFIG PAGE	5-12
FIGURE 5-17. STORMSCOPE TEST PAGE	5-12
FIGURE 5-18. STORMSCOPE DOWNLOAD DATA PAGE	5-12
FIGURE 5-19. TRAFFIC PAGE (SKYWATCH)	5-13
FIGURE 5-20. TRAFFIC PAGE (TCAD)	5-13
FIGURE 5-21. RYAN TCAD CONFIG PAGE	5-13
FIGURE 5-22. GAD 42 CONFIG PAGE	5-13

1. GENERAL DESCRIPTION

1.1 INTRODUCTION

This manual describes the physical, mechanical, and electrical characteristics and the installation requirements for the 400 Series (GPS 400, GNC 420, and GNS 430) Panel-mounted units. After installation of the 400 Series system, FAA Form 337 must be completed by an appropriately certificated agency to return the aircraft to service.

1.2 EQUIPMENT DESCRIPTION

The 400 Series units are mark width (6.25" wide) units, and 2.66" high. The display is a 128 by 240 pixel color LCD. The units include two removable data cards, one with a Jeppesen database, and the second being an optional custom data card.

The GPS 400 is a GPS receiver certifiable for IFR en route, terminal, and non-precision approach operations.

The GNC 420 includes all the features of the GPS 400, and also includes an IFR certified airborne VHF communications transceiver.

The GNS 430 includes all the features of the GNC 420, and also includes IFR certified airborne VOR/Localizer and Glideslope receivers.

GPS signals are received by GARMIN's low profile GA 56 antenna (P/N 010-10040-0X).

CAUTION

The 400 Series product lens is coated with a special anti-reflective coating which is very sensitive to skin oils, waxes and abrasive cleaners. It is very important to clean the lens using an eyeglass lens cleaner which is specified as safe for anti-reflective coatings (one suitable product is Wal-Mart® Lens Cleaner) and a clean, lint-free cloth.

1.3 TECHNICAL SPECIFICATIONS

The conditions and tests required for TSO approval of the 400 Series are minimum performance standards. It is the responsibility of those desiring to install this article either on or within a specific type or class of aircraft to determine that the aircraft installation conditions are within the TSO standards. The article may be installed only if further evaluation by the applicant documents an acceptable installation and is approved by the administrator. For TSO Compliance, see Appendix A.

1.3.1 Physical Characteristics

Bezel Height	2.66 in. (67 mm)
Bezel Width	6.25 in. (159 mm)
Rack Height (Dimple-to-dimple)	2.69 in. (68 mm)
Rack Width	6.32 in. (160 mm)
Depth Behind Panel with Connectors (Measured from face of aircraft panel to rear of connector backshells)	11.00 in. (279 mm)
GPS 400 Weight (Unit only)	3.8 lbs. (1.7 kg)
GPS 400 Weight (Installed with rack and connectors)	4.9 lbs. (2.2 kg)
GNC 420 Weight (Unit only)	4.5 lbs. (2.0 kg)
GNC 420 Weight (Installed with rack and connectors)	5.8 lbs. (2.6 kg)
GNS 430 Weight (Unit only)	5.1 lbs. (2.3 kg)
GNS 430 Weight (Installed with rack and connectors)	6.5 lbs. (2.9 kg)

1.3.2 General Specifications

Operating Temperature Range	-20°C to +55°C. For more details see Environmental Qualification Form.
Humidity	95% non-condensing
Altitude Range	-1,500 ft to 50,000 ft
Input Voltage Range (GPS 400)	11 to 33 V _{DC}
Input Voltage Range GNS 430 (011-00280-00) and GNC 420 (011-00506-00)	22 to 33 V _{DC}
Input Voltage Range GNS 430 (011-00280-10) and GNC 420 (011-00506-10)	11 to 33 V _{DC}
Power Requirements—P4001 (GPS 400 Main Connector)	0.72 A @ 27.5 V _{DC} ; 1.44 A @ 13.75 V _{DC}
Power Requirements—P4001 (GNC 420 Main Connector)	1.5 A @ 27.5 V _{DC} (maximum)
Power Requirements—P4001 (GNS 430 Main Connector)	1.5 A @ 27.5 V _{DC} (maximum)
Power Requirements—P4002 (COM Connector) GNS 430 (011-00280-00) and GNC 420 (011-00506-00)	10 mA @ 27.5 V _{DC} (not transmitting); 3.0 A @ 27.5 V _{DC} (transmitting)
Power Requirements—P4002 (COM Connector) GNS 430 (011-00280-10) and GNC 420 (011-00506-10)	10 mA @ 27.5 V _{DC} (not transmitting); 3.0 A @ 27.5 V _{DC} (transmitting); 10 mA @ 13.75 V _{DC} (not transmitting); 6.0 A @ 13.75 V _{DC} (transmitting)
Superflag Power Requirements	500 mA max. per superflag output @ 27.5 V _{DC} . 1.0 A max. @ 27.5 V _{DC} on P4001 (Main Superflags). 1.0 A max. @ 27.5 V _{DC} on P4006 (VOR/LOC, G/S Superflags).
Software	RTCA DO-178B level C
Environmental Testing	RTCA DO-160C. For more details see Environmental Qualification Forms.

1.3.3 GPS Specifications

Regulatory Compliance	TSO C129a, RTCA DO-208
Acquisition Time	a) Search-the-Sky (without almanac, without initial position or time): 5 minutes b) AutoLocate™ (with almanac, without initial position or time): 5 minutes c) Cold Start (position known to 300 nm, time known to 10 minutes, with valid almanac): 45 seconds d) Warm Start (position known to 10 nm, time known to 10 minutes, with valid almanac and ephemeris): 15 seconds
Max Velocity	1000 kts.
Dynamics	6 g

1.3.4 COM Transceiver Specifications (GNC 420 and GNS 430 Only)

Regulatory Compliance	TSO-C37d Class 4 & 6*, TSO-C38d Class C & E, JTSO-2C37e, JTSO-2C38e, RTCA DO-186a ICAO Annex 10 Volume III (Part II – Voice Communications Systems) Par. 2.3.3
Audio Output	100 mW minimum into a 500 Ω load.
Audio Response	Less than 6 dB of Variation between 350 and 2500 Hz.
Audio Distortion	The distortion in the receiver audio output shall not exceed 15% at all levels up to 100 mW.
AGC Characteristics	The audio output shall not vary by more than 6 dB when the level of the RF input signal, modulated 30% at 1000 Hz, is varied from 5 μ V to 450,000 μ V.
Sensitivity	(S+N)/N on all channels shall be greater than 6 dB when the RF level is 2 μ V (hard) modulated 30% at 1000 Hz at rated audio.
Squelch	2 μ v \pm 6 dB for 25 kHz channels. 3 μ v \pm 6 dB for 8.33 kHz channels.
Selectivity	6 dB BW is greater than \pm 8 kHz for 25 kHz channeling. 60 dB BW is less than \pm 25 kHz for 25 kHz channeling. 6 dB BW is greater than \pm 2.778 kHz for 8.33 kHz channeling. 60 dB BW is less than \pm 7.37 kHz for 8.33 kHz channeling.
Spurious Response	Greater than 85 dB.
Transmitter Power	At Least 10 Watts*.
Transmitter Duty Cycle	Recommended 10% maximum.
Modulation Capability	The modulation shall not be less than 70% and not greater than 98% with a standard modulator signal applied to the transmitter.
Carrier Noise Level	Shall be at least 45 dB (S+N)/N.
Frequency Stability	0.0005%
Demodulated Audio Distortion	Less than 10% distortion when the transmitter is modulated at least 70%.
Sidetone	1.4 V _{RMS} into a 500 Ω load when the transmitter is modulated at least 70%.
Demodulated Audio Response	Shall be less than 6 dB when the audio input frequency is varied from 350 to 2500 Hz.

* C37d Class 4 & 6 may not provide suitable COM transmit range for some high-altitude aircraft.

1.3.5 VOR Specifications (GNS 430 Only)

Regulatory Compliance	TSO C40c, JTSSO-2C40c, RTCA DO-196, EuroCAE ED-22B
Receiver Audio Sensitivity	At -103.5 dBm (S+N)/N shall not be less than 6 dB.
Course Deviation Sensitivity	-103.5 dBm or less for 60% of standard deflection.
Flag	The VOR Course Deviation Flag <u>must</u> be flagged: a) in the absence of an RF signal. b) in the absence of the 9960 Hz modulation. c) in the absence of either one of the two 30 Hz modulations. d) When the level of a standard VOR deviation test signal produces less than a 50% of standard deflection.
AGC Characteristics	From -99 dBm to -13 dBm input of a Standard VOR Audio Test Signal, audio output levels shall not vary more than 3 dB.
Spurious Response	Greater than 80 dB.
VOR OBS Bearing Accuracy	The bearing information as presented to the pilot shall not have an error in excess of 2.7° as specified by RTCA DO-196 and EuroCAE ED-22B.
Audio Output	A minimum 100 mW into a 500 Ω load.
Audio Response	Less than 6 dB of variation between 350 and 2500 Hz. Except the 1020 Hz Ident Tone will be at least 20 dB down in voice mode.
Audio Distortion	The distortion in the receiver audio output shall not exceed 10% at all levels up to 100 mW.

1.3.6 LOC Specifications (GNS 430 Only)

Regulatory Compliance	TSO C36e, JTSO-C36e, RTCA DO-195 CLASS A, EuroCAE ED-46B
Receiver Audio Sensitivity	At -103.5 dBm (S+N)/N shall not be less than 6 dB.
Course Deviation Sensitivity	-103.5 dBm or less for 60% of standard deflection.
Flag	The LOC Course Deviation Flag <u>must</u> be flagged: a) in the absence of an RF signal. b) When either the 90 or 150 Hz modulating signals is removed and the other is maintained at its normal 20%. c) In the absence of both 90 and 150 Hz modulation. d) When the level of a standard localizer deviation test signal produces less than a 50% of standard deflection.
AGC Characteristics	From -86 dBm and -33 dBm input of a Standard VOR Audio Test Signal, audio output levels shall not vary more than 3 dB.
Selectivity	Nose Bandwidth: The input signal level required to produce the reference AGC voltage shall not vary more than 6 dB over the input signal frequency range of ± 9 kHz from the assigned channel frequency. Skirt Bandwidth: The input signal level required to produce reference AGC voltage shall be at least 70 dB greater than the level required to produce reference AGC voltage at the assigned channel frequency at ± 36 kHz from the assigned channel frequency.
Spurious Response	Greater than 80 dB.
Centering Accuracy	Typical 0 ± 3 mV (Max error 9.9 mV per RTCA DO-195).
Audio Output	A minimum 100 mW into a 500 Ω load.
Audio Response	Less than 6 dB of Variation between 350 and 2500 Hz. Except the 1020 Hz Ident Tone will be at least 20 dB down in voice mode.
Audio Distortion	The distortion in the receiver audio output shall not exceed 10% at all levels up to 100 mW.

1.3.7 Glideslope Specifications (GNS 430 Only)

Regulatory Compliance	TSO C34e, JTSO-C34e, RTCA DO-192, EuroCAE ED-47B
Sensitivity	-87 dBm or less for 60% of standard deflection.
Centering Accuracy	$0 \pm .0091$ ddm or 0 ± 7.8 mV
Selectivity	The course deviation shall be $0 \text{ ddm} \pm .0091 \text{ ddm}$ when using the Glideslope Centering Test Signal as the RF frequency is varied ± 17 kHz from the assigned channel. At frequencies displaced by ± 132 kHz or greater, the input signal shall be at least 60 dB down.
Standard deflection	a) With a standard deflection 'FLY DOWN' condition (90 Hz dominant), the output shall be $-78 \text{ mV} \pm 7.8 \text{ mV}$. b) With a standard deflection 'FLY UP' condition (150 Hz dominant), the output shall be $+78 \text{ mV} \pm 7.8 \text{ mV}$.
Flag	The unit will Flag a) when the level of a standard deviation test signal produces 50% or less of standard deflection of the deviation indicator. b) In the absence of 150 Hz modulation. c) In the absence of 90 Hz modulation. d) In the absence of both 90 Hz and 150 Hz modulation. e) In the absence of RF.

1.4 LICENSE REQUIREMENTS

The following guidance is provided to help ensure the proper licensing of the GNC 420/GNS 430 COM:

1. The Telecommunications Act of 1996 effective February 8, 1996 provides the FCC discretion to eliminate radio station license requirements for aircraft. At present, an individual license to operate the 400 Series aboard a private aircraft is not needed in many circumstances. Please see FCC Fact Sheet PR5000 or contact the FCC at 1-800-322-1117 for more information.
2. No license change is required for an aircraft which already has a station license per FCC 404 Instructions dated 1994.
3. If an aircraft license is required or desired, contact the FCC at 1-800-322-1117 to request FCC Form 404, "Application for Aircraft Radio Station License," to apply for FCC authorization. The FCC also has a "Fax on Demand" service to provide forms by FAX at 202-418-0177.

This equipment has been type accepted by the FCC. The bandwidth/emission designator is 6K00 A3E.

CAUTION

THE VHF TRANSMITTER IN THIS EQUIPMENT IS GUARANTEED TO MEET FEDERAL COMMUNICATIONS COMMISSION ACCEPTANCE OVER THE OPERATING TEMPERATURE RANGE. MODIFICATIONS NOT EXPRESSLY APPROVED BY GARMIN COULD INVALIDATE THE LICENSE AND MAKE IT UNLAWFUL TO OPERATE THE EQUIPMENT.

1.5 CERTIFICATION

The GPS receivers in the 400 Series units are certified for IFR enroute, terminal, and non-precision approaches. The 400 Series initial certification was accomplished via STC's by GARMIN in a Piper PA32. See Appendix B for copies of the STC's.

The 400 Series units have been qualified to RTCA/DO-160 Section 22 lightning requirements. Special installation considerations are required, refer to the Environmental Qualification Forms in Appendix A.

1.6 LIMITED WARRANTY

GARMIN Corporation warrants this product to be free from defects in materials and manufacture for one year from the date of purchase. GARMIN will, at its sole option, repair or replace any components that fail in normal use. Such repairs or replacement will be made at no charge to the customer for parts or labor. The customer is, however, responsible for any transportation costs. This warranty does not cover failures due to abuse, misuse, accident or unauthorized alteration or repairs.

THE WARRANTIES AND REMEDIES CONTAINED HEREIN ARE EXCLUSIVE AND IN LIEU OF ALL OTHER WARRANTIES EXPRESS OR IMPLIED OR STATUTORY, INCLUDING ANY LIABILITY ARISING UNDER ANY WARRANTY OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE, STATUTORY OR OTHERWISE. THIS WARRANTY GIVES YOU SPECIFIC LEGAL RIGHTS, WHICH MAY VARY FROM STATE TO STATE.

IN NO EVENT SHALL GARMIN BE LIABLE FOR ANY INCIDENTAL, SPECIAL, INDIRECT OR CONSEQUENTIAL DAMAGES, WHETHER RESULTING FROM THE USE, MISUSE, OR INABILITY TO USE THIS PRODUCT OR FROM DEFECTS IN THE PRODUCT. SOME STATES DO NOT ALLOW THE EXCLUSION OF INCIDENTAL OR CONSEQUENTIAL DAMAGES, SO THE ABOVE LIMITATIONS MAY NOT APPLY TO YOU.

To obtain warranty service, call the GARMIN Customer Service department (913-397-8200) for a returned merchandise tracking number. The unit should be securely packaged with the tracking number clearly marked on the outside of the package and sent freight prepaid and insured to a GARMIN warranty service station. A copy of the original sales receipt is required as the proof of purchase for warranty repairs. GARMIN retains the exclusive right to repair or replace the unit or software or offer a full refund of the purchase price at its sole discretion. SUCH REMEDY SHALL BE YOUR SOLE AND EXCLUSIVE REMEDY FOR ANY BREACH OF WARRANTY.

2. INSTALLATION

2.1 INTRODUCTION

Careful planning and consideration of the suggestions in this section are required to achieve the desired performance and reliability from the 400 Series unit. Any deviations from the installation instructions prescribed in this document shall be accomplished in accordance with the requirements set forth in FAA AC 43.13-2A.

2.2 ANTENNA CONSIDERATIONS

Antenna installations on pressurized cabin aircraft require FAA approved installation design and engineering substantiation data whenever such antenna installations incorporate alteration (penetration) of the cabin pressure vessel by connector holes and/or mounting arrangements. For needed engineering support pertaining to the design and approval of such pressurized aircraft antenna installations, it is recommended that the installer proceed according to any of the following listed alternatives:

1. Obtain approved antenna installation design data from the aircraft manufacturer.
2. Obtain an FAA approved STC pertaining to and valid for the antenna installation.
3. Contact the FAA Aircraft Certification Office in the appropriate Region and request identification of FAA Designated Engineering Representatives (DERs) who are authorized to prepare and approve the required antenna installation engineering data.
4. Obtain FAA Advisory Circular AC-183C and identify a DER from the roster of individuals in it.
5. Contact an aviation industry organization such as the Aircraft Electronics Association for assistance.

2.2.1 GPS ANTENNA LOCATION

The GA 56 Antenna must be mounted on top of the aircraft. For best performance, select a location with an unobstructed view of the sky above the aircraft when in level flight. Figure 2-1 illustrates a typical GPS antenna installation. The antenna should be located at least three feet from transmitting antennas such as VHF COM, HF transmitter, DME, Transponder and Radar.

For rotorcraft, locate the GA 56 Antenna as far as possible from the main rotor hub. This reduces the percentage of time the blade blocks the antenna. Also mount it as far below the blade surface as possible if installing the antenna under the blade. This reduces signal distortion caused by the blades.

2.2.2 COM ANTENNA LOCATION

The GNC 420 or GNS 430 COM antenna should be well removed from all projections, engines and propellers. The ground plane surface directly below the antenna should be a flat plane over as large an area as possible (18 inches square, minimum). The antenna should be mounted a minimum of six feet from any DME antennas, four feet from any ADF sense antennas, and three feet from the 400 Series and its GPS antenna.

2.2.3 VOR/LOC ANTENNA LOCATION

The GNS 430 VOR/LOC antenna should be well removed from all projections, engines and propellers. It should have a clear line of sight if possible. The antenna must be mounted along the centerline of the aircraft, minimizing the lateral offset.

2.2.4 GLIDESLOPE ANTENNA LOCATION

The GNS 430 Glideslope antenna should be well removed from all projections, engines and propellers. It should have a clear line of sight if possible.

2.2.5 ELECTRICAL BONDING

No special precautions need to be taken to provide a bonding path between the GPS antenna and the aircraft structure. Follow the manufacturers' instructions for the COM, VOR/LOC and Glideslope antennas.

2.2.6 ANTENNA LIMITATIONS

GARMIN's GA 56 Antennas are recommended for installations where the airspeed of the aircraft will be subsonic. In such installations, GA 56—Mod 1 or later—must be used. See the COM, VOR/LOC, and Glideslope antenna specifications for their limitations.

2.2.7 VHF COM INTERFERENCE OF GPS

On many panel-mounted installations, VHF COM transceivers can radiate strong harmonics from the transceiver and its antenna. The 400 Series COM will not interfere with its own GPS section. However, placement of the GA 56 GPS antenna relative to a COM transceiver and COM antenna, including the GNC 420 or GNS 430 COM antenna, is critical.

Use the following guidelines, in addition to others in this document, when locating the 400 Series unit and its antennas.

- GPS Antenna—Locate as far as possible from all COM antennas and all COM transceivers (including the 400 Series COM). The GPS antenna will be much less sensitive to COM antennas that use a 1.57542 GHz notch filter.
- Locate the 400 Series unit as far as possible from all COM antennas.



Figure 2-1. GPS Antenna and Unit Installation Considerations

If a COM antenna is found to be the problem, a 1.57542 GHz notch filter (GARMIN P/N 330-00067-00) may be installed in the VHF COM coax, as close to the COM as possible. This filter is not required for the GNC 420 and GNS 430 transmitters.

If a COM is found to be radiating, the following can be done:

1. Replace or clean VHF COM rack connector to ensure good coax ground.
2. Place a grounding brace between the 400 Series unit, VHF COM and ground.
3. Shield the VHF COM wiring harness.

2.2.8 COM, VOR/LOC, and Glideslope Antenna Installation Instructions

Install the COM, VOR/LOC, and Glideslope antennas according to the manufacturer's recommendations. Avoid running other wires and coaxial cables near the VOR/LOC antenna cable.

2.3 RACK CONSIDERATIONS

Plan a location which gives the pilot complete and comfortable access to the entire keypad and which is plainly visible from the pilot's perspective. Installation of remote switches and annunciators may not be required if the 400 Series unit is installed in the pilot's normal field of view (refer to the FAA letter in Appendix B).

Check that there is adequate depth for the rack in the instrument panel. A location away from heating vents or other sources of heat generation is optimal. Figure 2-1 illustrates a typical aviation rack installation.

2.4 CABLING AND WIRING

Coaxial cable with 50 Ω nominal impedance and meeting applicable aviation regulations should be used for the installation. A typical maximum cable length for the GPS antenna is 40 feet. The installer should insure that the attenuation does not exceed 10 dB at 1.5 GHz for the specific installation.

Check that there is ample space for the cabling and mating connectors. Avoid sharp bends in cabling, particularly the COM antenna cable, and routing near aircraft control cables. Cabling for the 400 Series unit should not be routed near components or cabling which are sources of electrical noise. Do not route the COM antenna cable near any ADF antenna cables. Route the GPS, VOR/LOC, and Glideslope antenna cables as far as possible away from all COM transceivers and antenna cables.

2.5 COOLING AIR

The 400 Series units meet all TSO requirements without external cooling. However, as with all electronic equipment, lower operating temperatures extend equipment life. On the average, reducing the operating temperature by 15-20 $^{\circ}\text{C}$ (25 to 35 $^{\circ}\text{F}$) doubles the mean time between failure (MTBF). Recommended airflow rating is 1 CFM (cubic foot per minute) at a pressure equivalent to 0.1 inches of water.

Units tightly packed in the avionics stack heat each other through radiation, convection, and sometimes by direct conduction. Even a single unit operates at a much higher temperature in still air than in moving air. Fans or some other means of moving the air around electronic equipment are usually a worthwhile investment. A 5/8" diameter air fitting is provided on the rear of the mounting rack for the purpose of admitting cooling air under such conditions. If a form of forced air cooling is installed, make certain that rainwater cannot enter and be sprayed on the equipment.

2.6 MINIMUM INSTALLATION REQUIREMENTS

Below is a list of required devices for TSO C129a category A1 and A2 certification. For a specific list of equipment used in the initial STC, obtain a copy of "GNS 430 in Piper PA32 Documented Installation" (P/N 190-00140-06). Deviations from that set of equipment should be approved by the FAA or the governing organization.

Pressure Altitude Device

This device delivers pressure altitude data to the 400 Series unit. This data can come from a parallel encoding altimeter, blind encoder, serializer, or an air data system.

Manual Course Device (Required for GNS 430 Only)

This device delivers the manual course select to the 400 Series unit, which is required for the GNS 430 VOR receiver, and optional for the 400/420/430 GPS receiver. Course information can come from an analog resolver, or from an EFIS/EHSI via ARINC 429 serial data.

HSI/CDI Indicator or EFIS

This device displays Nav Flag, Left/Right, To/From, Glideslope Flag, and Up/Down. The indicator(s) used in conjunction with the GNS 430 VOR/ILS receivers shall be TSO'd.

Qualified GPS Antenna

This antenna must be one of those listed in the accessories list, or meet the following requirements:

1. DO-160C Environmental Conditions

The antenna shall meet the environmental conditions listed below and shall conform to the test requirements of RTCA DO-160C.

<u>Environmental Condition</u>	<u>Category</u>	<u>Description</u>
Temperature (operating)	F2	-55 to +70°C
(ground survival)	F2	-55 to +85°C
Altitude	F2	55,000 feet
Temperature Variation	A	10°C per minute
Humidity	C	95% at +55°C
Vibration	CLMY	Turbo/Reciprocating/Helicopter
Waterproofness	S	Continuous Stream
Fluids	F	Deicing Fluid
Lightning	2A	Direct Effects
Icing	C	0.15" thick

2. Electrical Characteristics

LNA Supply voltage	4.5 ± 0.5 V _{DC}
LNA Supply Current	20 mA Maximum
LNA Operating Frequency	1575.42 ± 2.00 MHz
LNA Gain	20 dB Maximum, 12dB Minimum
LNA Noise Figure	3.0 dB Maximum
LNA Output VSWR (50 Ω)	2:1 Maximum
LNA Input power at -1 dB Gain Compression	-6 dB Minimum
LNA Bandwidth	
(-3 dB)	40 MHz Maximum
(-20 dB)	100 MHz Maximum
(-40 dB)	250 MHz Maximum

3. Radiation Characteristics

Polarization	RHCP
Operating Frequency	1575.42 ± 2.00 MHz
Gain (on axis)	2.0 dBic Minimum
(at 160° beam width)	-6.0 dBic Minimum
Cross Pole Gain (LHCP)	
(on axis)	-8 dBic Maximum
(at 160° beam width)	-9 dBic Maximum

4. Mounting Requirements

Cable connection	BNC Female
Mounting studs	Four 8-32 UNC-2A studs 0.50" long

3. INSTALLATION PROCEDURE

3.1 UNIT AND ACCESSORIES

The 400 Series units are available under the following part numbers:

ITEM	GARMIN P/N
GPS 400 UNIT, includes: GPS 400 ASSEMBLY (011-00504-00)	010-00171-00
GPS 400 UNIT WITH ALL, includes: GPS 400 ASSEMBLY (011-00504-00) MOUNTING RACK (115-00243-00) CONNECTOR KIT (011-00351-03) BACK PLATE ASSEMBLY (011-00676-03) GPS 400 PRODUCT INFO KIT (K00-00056-00)	010-00171-01
GNC 420 UNIT, includes: GNC 420 ASSEMBLY (011-00506-00)	010-00173-00
GNC 420 UNIT WITH ALL, includes: GNC 420 ASSEMBLY (011-00506-00) MOUNTING RACK (115-00243-00) CONNECTOR KIT (011-00351-01) BACK PLATE ASSEMBLY (011-00676-01) GNC 420 PRODUCT INFO KIT (K00-00057-00)	010-00173-01
GNC 420 UNIT, includes: GNC 420 ASSEMBLY (011-00506-10)	010-00173-10
GNC 420 UNIT WITH ALL, includes: GNC 420 ASSEMBLY (011-00506-10) MOUNTING RACK (115-00243-00) CONNECTOR KIT (011-00351-01) BACK PLATE ASSEMBLY (011-00676-01) GNC 420 PRODUCT INFO KIT (K00-00057-00)	010-00173-11
GNS 430 UNIT, includes: GNS 430 ASSEMBLY (011-00280-00)	010-00139-00
GNS 430 UNIT WITH ALL, includes: GNS 430 ASSEMBLY (011-00280-00) MOUNTING RACK (115-00243-00) CONNECTOR KIT (011-00351-00) BACK PLATE ASSEMBLY (011-00676-00) GNS 430 PRODUCT INFO KIT (K00-00055-00)	010-00139-01
GNS 430 UNIT, includes: GNS 430 ASSEMBLY (011-00280-10)	010-00139-10
GNS 430 UNIT WITH ALL, includes: GNS 430 ASSEMBLY (011-00280-10) MOUNTING RACK (115-00243-00) CONNECTOR KIT (011-00351-00) BACK PLATE ASSEMBLY (011-00676-00) GNS 430 PRODUCT INFO KIT (K00-00055-00)	010-00139-11

The following installation accessories are available:

1. GPS Antenna Options:

- GA 56 Antenna Kit, without cable (Mod 1 or later, GARMIN P/N 010-10040-01). This kit contains the following items:

ITEM	GARMIN P/N	QTY
GA 56 ANTENNA SUB-ASSEMBLY	011-00134-00	1
BACKING PLATE	115-00031-00	1
NUT, SELF-LOCKING, #8-32	210-10004-09	4
ANTENNA GASKET	253-00002-00	1

- GA 56 Flange Mount Antenna Kit (Mod 1 or later, GARMIN P/N 010-10040-02). This kit contains the following items:

ITEM	GARMIN P/N	QTY
FLANGE MOUNT GA 56 ANTENNA SUB-ASSEMBLY	011-00147-00	1
NUT PLATE	115-00080-00	1
SCREW, #10-32 x 5/8"	211-62212-14	4
ANTENNA GASKET	253-00011-00	1

2. Other accessories include the following:

ITEM	GARMIN P/N
MOUNTING RACK, 400/420/430	115-00243-00
GPS 400 BACK PLATE ASSEMBLY	011-00676-03
GPS 400 CONNECTOR KIT	011-00351-03
GNC 420 BACK PLATE ASSEMBLY	011-00676-01
GNC 420 CONNECTOR KIT	011-00351-01
GNS 430 BACK PLATE ASSEMBLY	011-00676-00
GNS 430 CONNECTOR KIT	011-00351-00
400 SERIES ADDENDUM FOR TRAFFIC & WEATHER INTERFACES	190-00140-10
GPS 400 PRODUCT INFO KIT	K00-00056-00
GPS 400 PILOT'S GUIDE	190-00140-60
GPS 400 QUICK REFERENCE GUIDE	190-00140-61
GPS 400 SAMPLE AIRPLANE FLIGHT MANUAL SUPPLEMENT	190-00140-64
GNC 420 PRODUCT INFO KIT	K00-00057-00
GNC 420 PILOT'S GUIDE	190-00140-20
GNC 420 QUICK REFERENCE GUIDE	190-00140-21
GNC 420 SAMPLE AIRPLANE FLIGHT MANUAL SUPPLEMENT	190-00140-24
GNS 430 PRODUCT INFO KIT	K00-00055-00
GNS 430 PILOT'S GUIDE	190-00140-00
GNS 430 QUICK REFERENCE GUIDE	190-00140-01
GNS 430 SAMPLE AIRPLANE FLIGHT MANUAL SUPPLEMENT	190-00140-04

NOTE

A mounting rack is required for approved installations. The following hardware is required for installation of the mounting rack, but is not provided--#6-32 Flat Head Screw (6 ea.), #6-32 Self-locking Nut (6 ea.).

3.2 DATA BASE OPTIONS

ITEM	GARMIN P/N
DATA CARD, WORLD WIDE	010-10201-00
DATA CARD, AMERICAS	010-10201-01
DATA CARD, INTERNATIONAL	010-10201-02

3.3 MISCELLANEOUS OPTIONS

ITEM	GARMIN P/N
CONNECTOR, BNC, MALE, CLAMP	330-00087-00
LOW-LOSS AVIATION ANTENNA EXTENSION CABLE WITH RIGHT ANGLE BNC CONNECTOR, 15 FT.	320-00003-00
LOW-LOSS AVIATION ANTENNA EXTENSION CABLE WITH RIGHT ANGLE BNC CONNECTOR, 30 FT.	320-00003-02
GPS 1.57542 GHz NOTCH FILTER	330-00067-00

3.4 INSTALLATION ACCESSORIES REQUIRED BUT NOT PROVIDED

The following installation accessories are required but not provided:

- COM Antenna: (GNC 420 and GNS 430 Only) Shall meet TSO C37() and C38(). Broad band, 50 Ω , vertically polarized with coaxial cable
- VOR/LOC Antenna: (GNS 430 Only) Shall meet TSO C40() and C36(). Broad band, 50 Ω , horizontally polarized with coaxial cable
- Glideslope Antenna: (GNS 430 Only) Shall meet TSO C34(). Broad band, 50 Ω , horizontally polarized with coaxial cable or low-loss splitter used with the VOR/LOC antenna
- Headphones: (GNC 420 and GNS 430 Only) 500 Ω nominal impedance
- Microphone: (GNC 420 and GNS 430 Only) Low impedance, carbon or dynamic, with transistorized pre-amp

3.5 ANTENNA INSTALLATION

For the COM, VOR/LOC, and Glideslope antennas, follow the manufacturers' instructions.

The remainder of this section applies to the GPS antenna. The GA 56 antenna outline and footprint dimensions are shown in Figure 3-2, page 3-5.

1. Using the backing plate as a template, mark the location of the mounting holes and the through hole for coaxial cable. Drill or punch the holes.
2. The antenna installation must provide adequate support for the antenna considering a maximum drag load of 5 lbs. For the GA 56 antennas (at subsonic speed). Install a doubler plate to reinforce thin-skinned aircraft. Observe guidelines for acceptable installation practices as outlined in AC 43.13-2A.
3. Seal the antenna and gasket to the fuselage using a good quality electrical grade sealant. Use caution to insure that the antenna connector is not contaminated with sealant. Insure that the mounting screws are fully tightened and that the antenna base is well seated against the gasket.

CAUTION

Do not use construction grade RTV sealant or sealants containing acetic acid. These sealants may damage the electrical connections to the antenna. Use of these type sealants may void the antenna warranty.

3.6 CABLE INSTALLATION

1. Route the coaxial cable to the rack location keeping in mind the recommendations of Section 2. Secure the cable in accordance with good aviation practice.
2. Trim the coaxial cable to the desired length and install the BNC connector (330-00087-00) per the cabling instructions on Figure 3-1. If the connector is provided by the installer, follow the connector manufacturer's instructions for cable preparation.

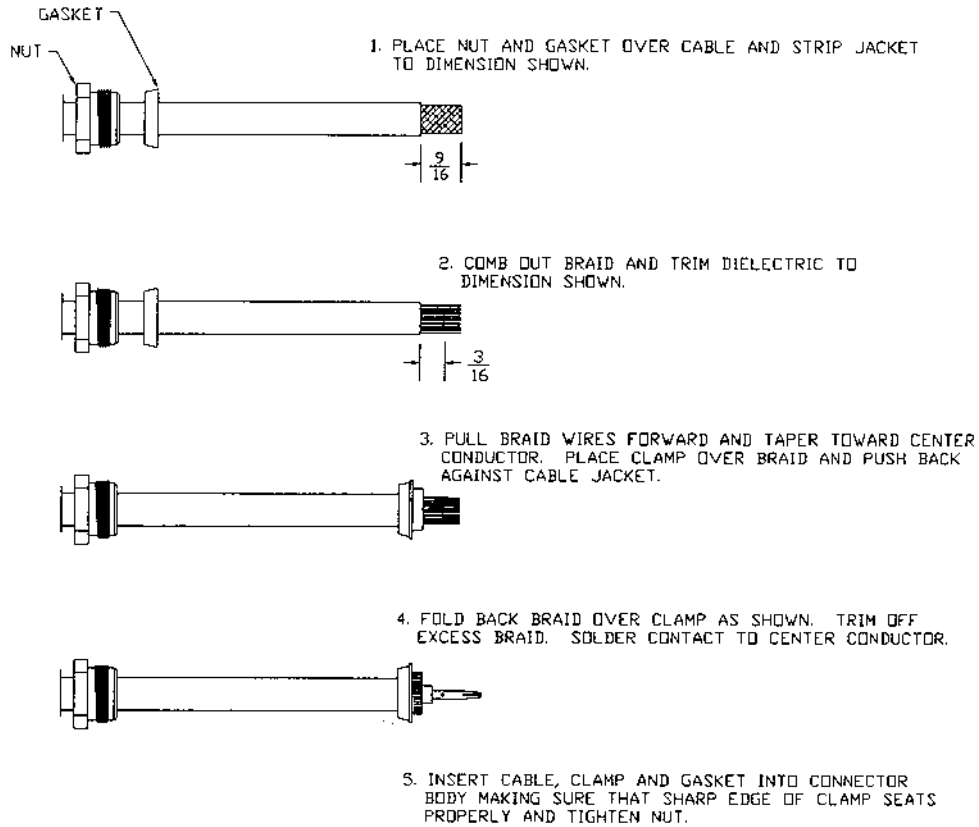


Figure 3-1. Coaxial Cable Installation

3. The card-edge connector may be used to terminate shield grounds to the 400 Series back plate.

CAUTION

4. Feed wires through the connector backshells before insertion into the 78, 44, and 25 pin connectors.
5. Contacts for the 78, 44 and 25 pin connectors must be crimped onto the individual wires of the aircraft wiring harness. The following tables list contact part numbers (for reference) and recommended crimp tools:

Table 3-1. Pin Contact Part Numbers

	78 pin conn (P4001)	44 pin conn (P4006)	25 pin connector (P4002)		Shield ground connector
Connector Type	High Density Pin Contact		Standard Density Socket Contact		.1" Pitch Card-edge
Wire Gauge	22-28 AWG		18 AWG	20-24 AWG	N/A
GARMIN P/N	336-00021-00		336-00023-00	336-00022-00	336-00029-00
Military P/N	M39029/58-360		N/A	M39029/63-368	N/A
AMP	204370-2		N/A	205090-1	583853-4
Positronic	M39029/58-360		FC6018D	M39029/63-368	N/A
ITT Cannon	030-2042-000		See Note 3	031-1007-042	N/A

Table 3-2. Recommended Crimp Tools

Connector Type	Wire Gauge	High Density		Standard Density			
		22-28 AWG		18 AWG		20-24 AWG	
	Hand Crimping Tool	Positioner	Insertion/ Extraction Tool	Positioner	Insertion/ Extraction Tool	Positioner	Insertion/ Extraction Tool
Military P/N	M22520/2-01	M22520/2-09	M81969/1-04	N/A	M81969/1-02	M22520/2-08	M81969/1-02
Positronic	9507	9502-3	M81969/1-04	9502-11	M81969/1-02	9502-5	M81969/1-02
ITT Cannon	995-0001-584	995-0001-739	N/A	N/A	N/A	995-0001-604	980-2000-426
AMP	601966-1	601966-6	91067-1	N/A	N/A	601966-5	91067-2
Daniels	AFM8	K42	M24308/18-1	K774	M24308/1-02	K13-1	M24308/1-02
Astro	615717	615725	M81969/1-04	N/A	M81969/1-02	615724	M81969/1-02

NOTES

1. Insertion/extraction tools from ITT Cannon are all plastic; others are plastic with metal tip.
2. Non-GARMIN part numbers shown are not maintained by GARMIN and consequently are subject to change without notice.
3. Alternate contacts for 18 AWG wire: As an alternative to the Positronic contacts listed (and provided in the installation kit), the installer may use contacts made by ITT Cannon under P/N 031-1007-001. These contacts require the use of a different crimp tool positioner than shown in the table, with the part numbers as follows: Daniels P/N K250, Astro P/N 616245, or ITT Cannon P/N 980-0005-722.
4. For the card-edge connector pin contacts, use AMP part number 90272-1 or equivalent crimping tool.

3.7 RACK INSTALLATION

1. The back plate of the rack may optionally be removed for ease of mounting in the aircraft panel. To do so, remove the two #4-40 screws, tilt the back plate away from the tray, and then slide the back plate to the side.
2. Figures 3-3, 3-4 and 3-5, starting on page 3-7, show outline dimensions for the aviation rack for the various 400 Series units. Install the rack in a rectangular 6.320" x 2.700" hole (or gap between units) in the instrument panel (refer to Figure 3-9, page 3-21). The lower-front lip of the rack should be flush with, or extend slightly beyond, the finished aircraft panel.

CAUTION

If the front lip of the mounting rack is behind the surface of the aircraft panel, the 400 Series unit connectors may not fully engage.

Make sure that no screw heads or other obstructions will prevent the unit from fully engaging in the rack (refer to the "Connector Engagement Test," section 5.3.1, page 5-12). Exercise caution when installing the rack into the instrument panel. The rack is designed to facilitate removal of the 400 Series for use in Demo Mode outside the aircraft. Deformation of the rack may make it difficult to install and remove the 400 Series unit.

3. Install the rack in the aircraft panel using six #6-32 flat head screws and six self-locking nuts. The screws are inserted from the inside through the holes in the sides of the rack.
4. If the back plate was previously removed (see step #1), replace the back plate by positioning the tabs on the back plate in the slots of the left side of the rack (viewing it from the cockpit) and attaching it by replacing the two #4-40 screws.

3.8 400 SERIES UNIT INSERTION AND REMOVAL

The 400 Series unit is installed in the rack by sliding it straight in until it stops, about 1 inch short of the final position. A 3/32" hex drive tool is then inserted into the access hole at the bottom of the unit face. Rotate the hex tool clockwise while pressing on the left side of the bezel until the unit is firmly seated in the rack. It may be necessary to insert the hex drive tool into the access hole and rotate the mechanism 90° counterclockwise to insure correct position prior to placing the unit in the rack.

To remove the unit from the rack, insert the hex drive tool into the access hole on the unit face and rotate counterclockwise until the unit is forced out about 3/8" and can be freely pulled from the rack.

Be sure not to over tighten the unit into the rack. The application of hex drive tool torque exceeding 15 in•lbs can damage the locking mechanism.

3.9 COM ANTENNA INSTALLATION CHECK (GNC 420 AND GNS 430)

Check for insertion loss and VSWR (voltage standing wave ratio). VSWR should be checked with an in-line type wattmeter inserted in the coaxial transmission line between the transceiver and the antenna. Any problem with the antenna installation will most likely be seen as high reflected power. A VSWR of 3:1 will result in a 25% loss in power.

3.10 GA 56 Antenna Installation Drawing



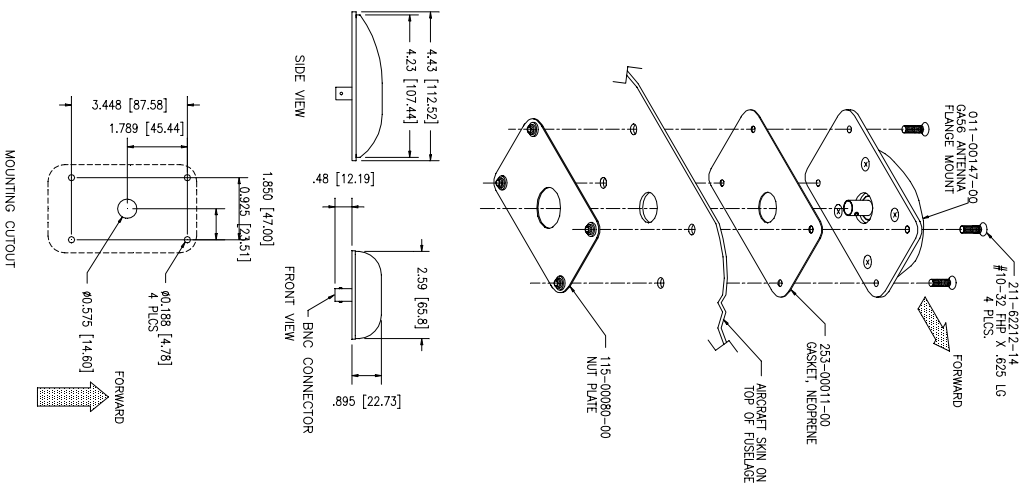



Figure 3-2. GA 56 Antenna Installation Drawing

3.11 Mounting Rack Dimensions

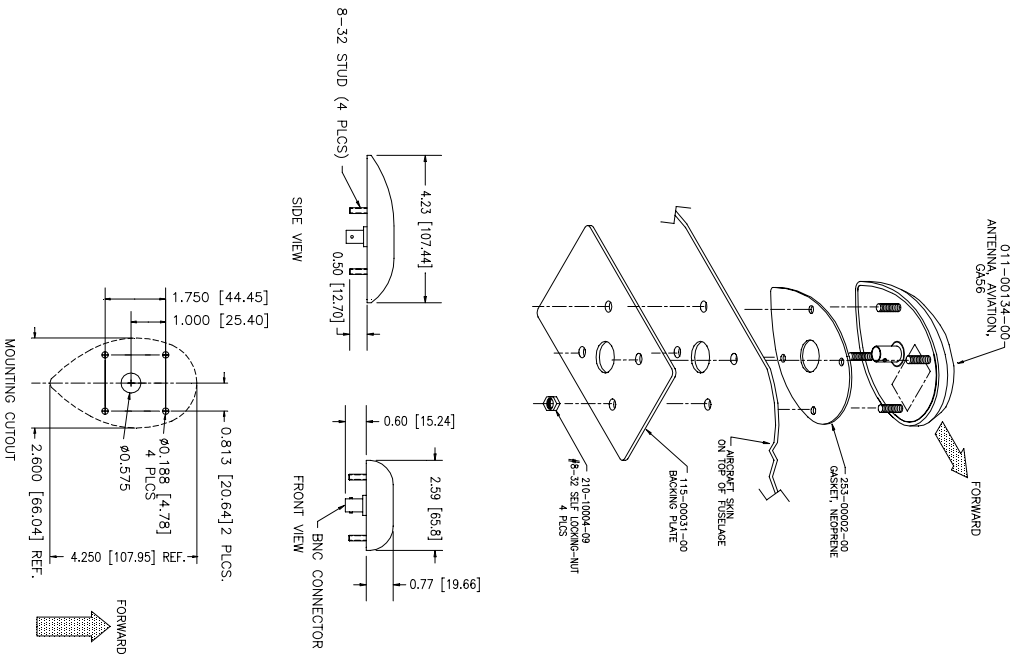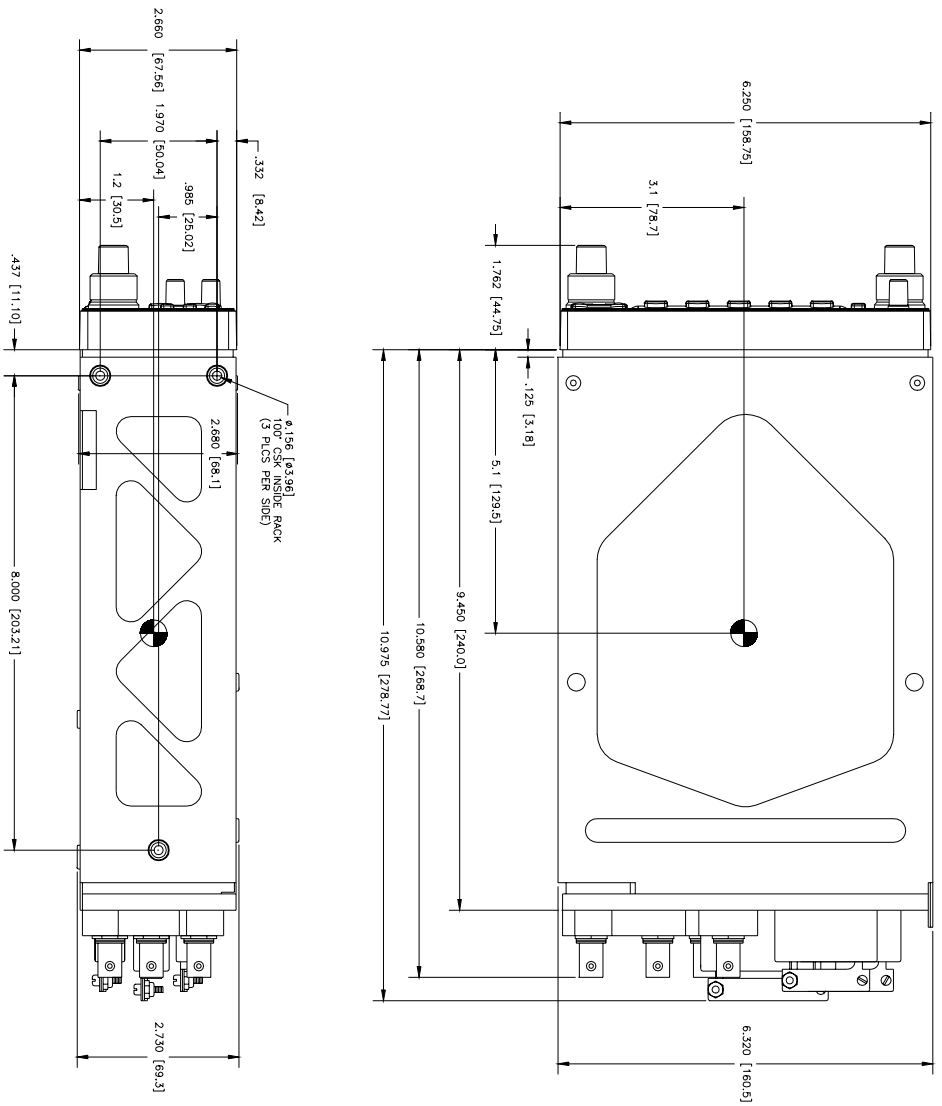


- NOTES:
1. DIMENSIONS: INCH [mm].
 2. UNIT WEIGHT: 5.1 lbs [2.31 kg].
 3. MOUNTING RACK, HARDWARE & CONNECTORS WEIGHT: 1.4 lbs [0.64 kg].
 4. CG LOCATION INCLUDES MOUNTING RACK, HARDWARE & CONNECTORS.

Figure 3-3. GNS 430 Mounting Rack Dimensions

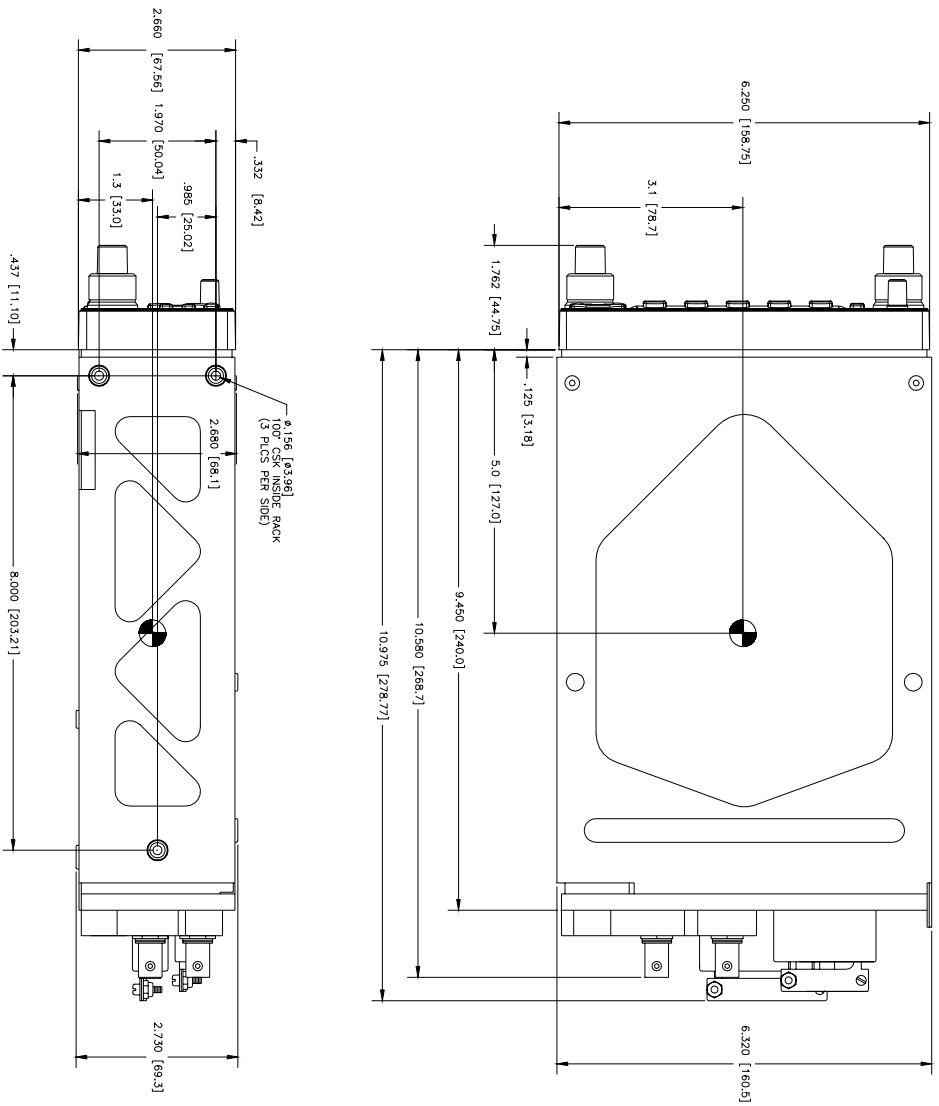

- NOTES:
1. DIMENSIONS: INCH [mm].
 2. UNIT WEIGHT: 4.5 lbs [2.04 kg].
 3. MOUNTING RACK, HARDWARE & CONNECTORS WEIGHT: 1.3 lbs [0.59 kg].
 4. CS LOCATION INCLUDES MOUNTING RACK, HARDWARE & CONNECTORS.

Figure 3-4. GNC 420 Mounting Rack Dimensions

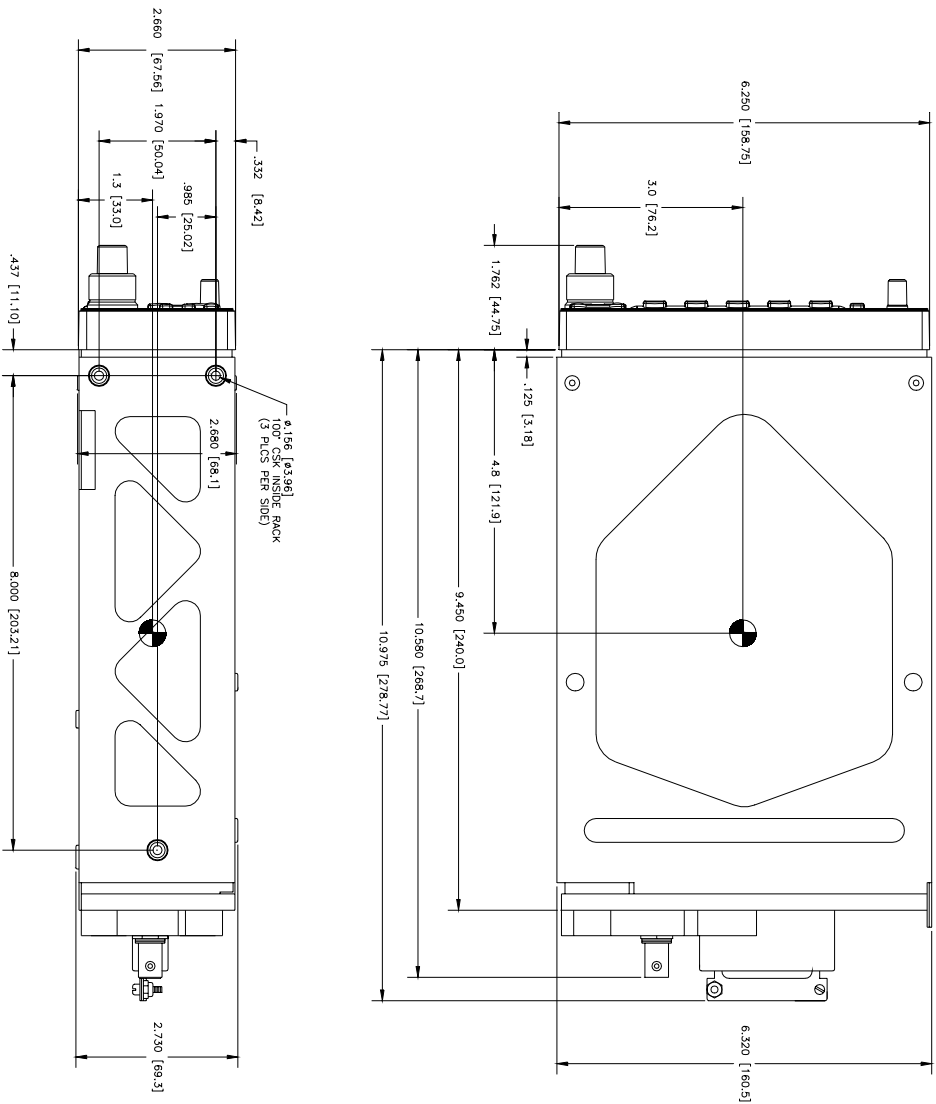


- NOTES:
1. DIMENSIONS: INCH [mm].
 2. UNIT WEIGHT: 3.8 lbs [1.72 kg].
 3. MOUNTING RACK, HARDWARE & CONNECTORS WEIGHT: 1.1 lbs [0.50 kg].
 4. CO LOCATION INCLUDES MOUNTING RACK, HARDWARE & CONNECTORS.


Figure 3-5. GPS 400 Mounting Rack Dimensions

3.13 Recommended Panel Cutout Dimensions


OPTION 1:
 STACK CUTOUT (RACK INSTALLED
 FROM FRONT OF AIRCRAFT PANEL)

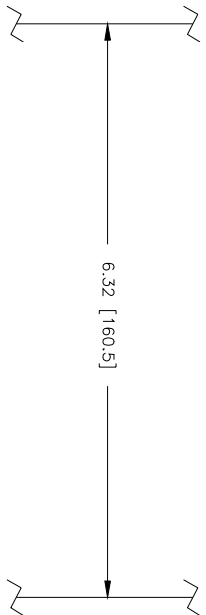

OPTION 2:
 RADIO CUTOUT (RACK INSTALLED
 FROM FRONT OF AIRCRAFT PANEL)

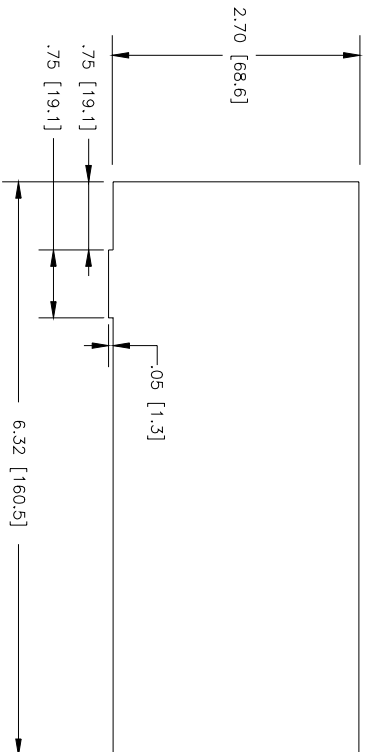

OPTION 3:
 RADIO CUTOUT (RACK INSTALLED
 FROM BACK OF AIRCRAFT PANEL ONLY)
 MAXIMUM AIRCRAFT PANEL THICKNESS
 IS .125 INCH [3.2 mm]

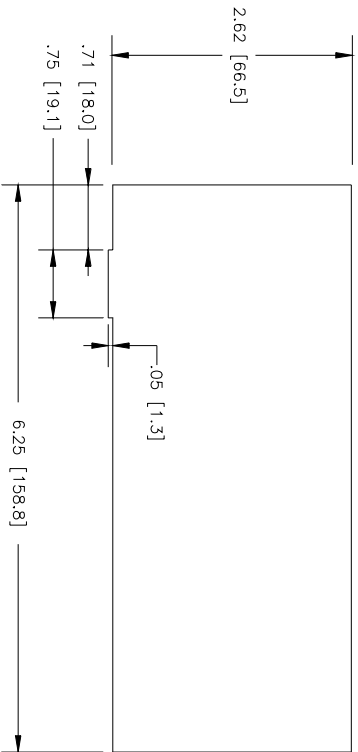

- NOTES:
1. DIMENSIONS: INCH [mm].
 2. IF THE FRONT LIP OF THE MOUNTING RACK IS BEHIND THE SURFACE OF THE AIRCRAFT PANEL, THE 400 SERIES UNIT CONNECTORS MAY NOT FULLY ENGAGE.


Figure 3-9. 400 Series Recommended Panel Cutout Dimensions

4. SYSTEM INTERCONNECTS

4.1 PIN FUNCTION LIST

4.1.1 P4001

View of J4001 connector from back of unit

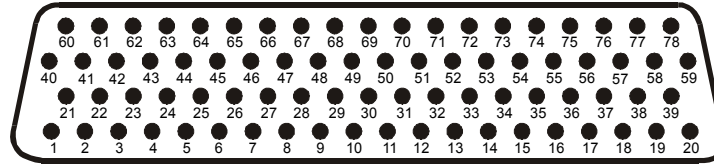


Pin	Pin Name	I/O
1	VLOC ANNUNCIATE	Out
2	GPS ANNUNCIATE	Out
3	WAYPOINT ANNUNCIATE	Out
4	TERMINAL ANNUNCIATE	Out
5	APPROACH ANNUNCIATE	Out
6	MESSAGE ANNUNCIATE	Out
7	OBS ANNUNCIATE	Out
8	AUTO ANNUNCIATE	Out
9	INTEGRITY ANNUNCIATE	Out
10	ANNUNCIATE D	Out
11	ANNUNCIATE E	Out
12	ALTITUDE ALARM ANNUNCIATE (Not implemented at time of publication)	Out
13	ANNUNCIATE F (Not implemented at time of publication)	Out
14	ILS/GPS APPROACH	Out
15	RESERVED	--
16	TIME MARK OUT	Out
17	MAIN LATERAL SUPERFLAG	Out
18	MAIN VERTICAL SUPERFLAG	Out
19	AIRCRAFT POWER	In
20	AIRCRAFT POWER	In
21	MAIN +LEFT	Out
22	MAIN +RIGHT (2.5V COMMON)	Out
23	MAIN LATERAL +FLAG	Out
24	MAIN LATERAL -FLAG (2.5V COMMON)	Out
25	MAIN +TO	Out
26	MAIN +FROM (2.5V COMMON)	Out
27	MAIN +UP	Out
28	MAIN +DOWN (2.5V COMMON)	Out
29	MAIN VERTICAL +FLAG	Out
30	MAIN VERTICAL -FLAG (2.5V COMMON)	Out
31	MAIN OBS ROTOR C	Out
32	MAIN OBS ROTOR H (GROUND)	Out
33	MAIN OBS STATOR D	In
34	MAIN OBS STATOR E (2.5V COMMON OBS)	Out
35	MAIN OBS STATOR F	In
36	MAIN OBS STATOR G (2.5V COMMON OBS)	Out

Connector P4001, continued

Pin	Pin Name	I/O
37	ALTITUDE ALARM AUDIO HI (Not implemented at time of publication)	Out
38	ALTITUDE ALARM AUDIO LO (Not implemented at time of publication)	Out
39	LIGHTING BUSS HI	In
40	LIGHTING BUSS LO	In
41	GPS RS 232 OUT 3	In
42	GPS RS 232 IN 3	Out
43	MAIN OBI CLOCK	Out
44	MAIN OBI DATA	Out
45	MAIN OBI SYNC	Out
46	GPS ARINC 429 OUT A	Out
47	GPS ARINC 429 OUT B	Out
48	GPS ARINC 429 IN 1 A	In
49	GPS ARINC 429 IN 1 B	In
50	GPS ARINC 429 IN 2 A	In
51	GPS ARINC 429 IN 2 B	In
52	RESERVED	--
53	RESERVED	--
54	GPS RS 232 OUT 4	Out
55	GPS RS 232 IN 4	In
56	GPS RS 232 OUT 1	Out
57	GPS RS 232 IN 1	In
58	GPS RS 232 OUT 2	Out
59	GPS RS 232 IN 2	In
60	ALTITUDE COMMON (GROUND)	Out
61	ALTITUDE C4	In
62	ALTITUDE C2	In
63	ALTITUDE C1	In
64	ALTITUDE B4	In
65	ALTITUDE B2	In
66	ALTITUDE B1	In
67	ALTITUDE A4	In
68	ALTITUDE A2	In
69	ALTITUDE A1	In
70	ALTITUDE D4	In
71	OBS MODE SELECT	In
72	RESERVED	--
73	CDI SOURCE SELECT	In
74	RESERVED	--
75	DEMO MODE SELECT	In
76	RESERVED	--
77	AIRCRAFT GROUND	--
78	AIRCRAFT GROUND	--

4.1.2 P4002 (GNC 420 and GNS 430 Only)


View of J4002 connector from back of unit



Pin	Pin Name	I/O
1	RESERVED	--
2	RESERVED	--
3	RESERVED	--
4	COM MIC KEY	In
5	INTERCOM MIC HI	In
6	COM MIC AUDIO HI	In
7	500Ω COM AUDIO HI	Out
8	RESERVED	--
9	RESERVED	--
10	RESERVED	--
11	AIRCRAFT POWER	In
12	AIRCRAFT POWER	In
13	RESERVED	--
14	TRANSMIT INTERLOCK	In
15	COM REMOTE TRANSFER	In
16	SPARE	--
17	INTERCOM MIC LO	In
18	COM MIC AUDIO LO	In
19	500Ω COM AUDIO LO	Out
20	RESERVED	--
21	AIRCRAFT GROUND	--
22	AIRCRAFT GROUND	--
23	RESERVED	--
24	RESERVED	--
25	RESERVED	--

4.1.3 P4006 (GNS 430 Only)

View of J4006 connector from back of unit

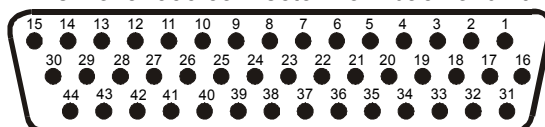

Pin	Pin Name	I/O
1	VOR/LOC +TO	Out
2	VOR/LOC +FROM (VOR/LOC COMMON)	Out
3	VOR/LOC +FLAG	Out
4	VOR/LOC -FLAG (VOR/LOC COMMON)	Out
5	VOR/LOC +LEFT	Out
6	VOR/LOC +RIGHT (VOR/LOC COMMON)	Out
7	RESERVED	--
8	VOR/LOC COMPOSITE OUT	Out
9	VOR OBS ROTOR C	Out
10	VOR OBS ROTOR H (GROUND)	Out
11	VOR OBS STATOR E/G (VOR/LOC COMMON)	In
12	VOR OBS STATOR F	In
13	VOR OBS STATOR D	In
14	PARALLEL DME - 8MHZ	Out
15	VOR/LOC SUPERFLAG	Out
16	500Ω VOR/ILS AUDIO HI	Out
17	500Ω VOR/ILS AUDIO LO	Out
18	SERIAL DME CLOCK	Out
19	SERIAL DME DATA	Out
20	SER DME - CHAN REQ/PAR DME - 4MHZ	I/O
21	SER DME - RNAV MODE/PAR DME - 2MHZ	I/O
22	DME COMMON	In
23	VOR/ILS ARINC 429 OUT B	Out
24	VOR/ILS ARINC 429 OUT A	Out
25	VOR OBI CLOCK	Out
26	VOR OBI SYNC	Out
27	VOR OBI DATA	Out
28	VLOC REMOTE TRANSFER	In
29	ILS ENERGIZE	Out
30	GLIDESLOPE +FLAG	Out
31	GLIDESLOPE +DOWN/-FLAG (GLIDESLOPE COMMON)	Out
32	GLIDESLOPE +UP	Out
33	PARALLEL DME - 1MHZ	Out
34	RESERVED	--
35	VOR/ILS ARINC 429 IN B	In
36	VOR/ILS ARINC 429 IN A	In
37	PARALLEL DME - 800KHZ	Out
38	GLIDESLOPE SUPERFLAG	Out
39	PARALLEL DME - 400KHZ	Out
40	PARALLEL DME - 200KHZ	Out
41	AIRCRAFT GROUND	--
42	PARALLEL DME - 100KHZ	Out
43	PARALLEL DME - 50KHZ	Out
44	AIRCRAFT POWER	In

4.2 POWER, LIGHTING, AND ANTENNAS

4.2.1 Power, Lighting, and Antennas Function

The section covers the Power Input requirements, Lighting Buss input, and Antenna connections.

4.2.2 Power, Lighting, and Antennas Electrical Characteristics

4.2.2.1 Aircraft Power

Pin Name	Connector	Pin	I/O
AIRCRAFT POWER	P4001	19	In
AIRCRAFT POWER	P4001	20	In
AIRCRAFT POWER	P4002	11	In
AIRCRAFT POWER	P4002	12	In
AIRCRAFT POWER	P4006	44	In
AIRCRAFT GROUND	P4001	77	--
AIRCRAFT GROUND	P4001	78	--
AIRCRAFT GROUND	P4002	21	--
AIRCRAFT GROUND	P4002	22	--
AIRCRAFT GROUND	P4006	41	--

CAUTION

To operate the GNC 420 P/N 011-00506-00 or GNS 430 P/N 011-00280-00 COM transceiver in a 14-volt aircraft, A 14 to 28 volt converter such as a KGS Electronics models RB-126 or UC-14-28 or equivalent must be used. The voltage converter should include exactly one short-circuit protection device on its output, such as a circuit breaker. P4002-11 and P4002-12 supply power to the COM transmitter. The other power input pins (P4001-19, P4001-20, and P4006-44) will accept 11-33 V_{DC}. GNC 420 P/N 011-00506-10 and GNS 430 P/N 011-00280-10 accept 11-33 V_{DC} on all power inputs. Refer to Figure 4-5 on page 4-29.

A power connection on P4006-44 is only required if NAV SUPERFLAG and/or G/S SUPERFLAG is utilized.

The power inputs P4001-19 and P4001-20 provide power for all functions of the 400 Series unit except the COM transmitter and the NAV & G/S SUPERFLAG outputs.

4.2.2.2 Lighting Buss

Pin Name	Connector	Pin	I/O
LIGHTING BUSS HI	P4001	39	In
LIGHTING BUSS LO	P4001	40	In

The 400 Series unit can be configured to track 28 V_{DC}, 14 V_{DC}, 5 V_{DC} or 5 V_{AC} lighting busses using these inputs. Alternatively, the 400 Series unit can automatically adjust for ambient lighting conditions based on the photocell. Refer to section 5.2.5.

4.2.2.3 Antennas

Pin Name	Connector	I/O
GPS ANTENNA	P4003	In
COM ANTENNA	P4004	I/O
VOR/LOC ANTENNA	P4005	In
GLIDESLOPE ANTENNA	P4007	In

4.2.3 Power, Lighting, and Antennas Configuration

Refer to section 5.2.5 for lighting configuration.

4.2.4 Power, Lighting, and Antennas Calibration and Checkout

Refer to section 3.9 for the COM antenna checkout.

4.2.5 Power, Lighting, and Antennas Interconnect

Refer to Figure 4-5 on page 4-29 for the power, lighting, and antennas interconnect.

4.3 ALTIMETER

4.3.1 Altimeter Function

Altitude input is required for GPS RAIM calculations, and is useful for advisory vertical navigation (VNAV) calculations.

4.3.2 Altimeter Electrical Characteristics

Pin Name	Connector	Pin	I/O
ALTITUDE D4	P4001	70	In
ALTITUDE A1	P4001	69	In
ALTITUDE A2	P4001	68	In
ALTITUDE A4	P4001	67	In
ALTITUDE B1	P4001	66	In
ALTITUDE B2	P4001	65	In
ALTITUDE B4	P4001	64	In
ALTITUDE C1	P4001	63	In
ALTITUDE C2	P4001	62	In
ALTITUDE C4	P4001	61	In
ALTITUDE COMMON	P4001	60	In

These inputs are considered active if either the voltage to ground is $< 1.9\text{ V}$ or the resistance to ground is $< 375\ \Omega$. These inputs are considered inactive if the voltage to ground is 11-33 V_{DC} .

NOTE

Some transponders and other altitude encoder receivers do not have internal isolation diodes to prevent the unit from pulling the encoder lines to ground when the unit is off. These units will require a diode to be added to the installation harness for each encoder line. The anode should be connected on the receiving unit's side and the cathode should be connected on the encoder side. A set of diodes is required for each unit without internal diodes. The 400 Series unit includes internal diodes for isolation of the encoder lines.

4.3.3 Altimeter Configuration

None.

4.3.4 Altimeter Calibration and Checkout

Refer to section 5.2.7 for the gray code altitude checkout.

4.3.5 Altimeter Interconnect

Refer to Figure 4-6 on page 4-31 for the altimeter interconnect.

4.4 MAIN INDICATOR

4.4.1 Main Indicator Function

The Main Indicator displays both lateral and vertical deviation from selected course, To/From indications, lateral and vertical flags and superflags.

The “CDI” key on the bezel of the GNS 430 takes the place of remote “NAV/GPS” switches, and is used to toggle between display of GPS and VOR/ILS navigation display on a remote indicator. The Navigation source is annunciated on the display above the ‘CDI’ key. The Navigation method is optionally annunciated externally by connecting to the VLOC ANNUNCIATE output (P4001-1) and GPS ANNUNCIATE output (P4001-2). GPS and VOR/ILS navigation may be toggled externally when the CDI SOURCE SELECT input (P4001-73) is momentarily grounded. See section 4.5 for more information on the external annunciators and switches.

An OBS resolver connection to the GPS is preferred, but not required. For the GNS 430, an OBS resolver will typically be connected to the MAIN OBS inputs for use with the GNS 430 VOR receiver.

4.4.2 Main Indicator Electrical Characteristics

4.4.2.1 Deviation

Pin Name	Connector	Pin	I/O
MAIN +LEFT	P4001	21	Out
MAIN +RIGHT (2.5V COMMON)	P4001	22	Out
MAIN +UP	P4001	27	Out
MAIN +DOWN (2.5V COMMON)	P4001	28	Out

The deviation output is capable of driving up to three 1000 Ω meter loads with $\pm 150 \text{ mV}_{\text{DC}} \pm 10\%$ for full-scale deflection. The drive circuit provides for more than full-scale deflection with a maximum course deviation output voltage of $\pm 300 \text{ mV}_{\text{DC}} \pm 10\%$.

4.4.2.2 TO/FROM

Pin Name	Connector	Pin	I/O
MAIN +TO	P4001	25	Out
MAIN +FROM (2.5V COMMON)	P4001	26	Out

The output is capable of driving up to three 200 Ω meter loads. When indicating TO, MAIN +TO is $+190 \pm 40 \text{ mV}_{\text{DC}}$ with respect to MAIN +FROM. When indicating FROM, MAIN +TO is $-190 \pm 40 \text{ mV}_{\text{DC}}$ with respect to MAIN +FROM. When invalid information is present (Flag IN VIEW) the TO/FROM output is $0 \pm 10 \text{ mV}_{\text{DC}}$.

4.4.2.3 Flag

Pin Name	Connector	Pin	I/O
MAIN LATERAL +FLAG	P4001	23	Out
MAIN LATERAL -FLAG (2.5V COMMON)	P4001	24	Out
MAIN VERTICAL +FLAG	P4001	29	Out
MAIN VERTICAL -FLAG (2.5V COMMON)	P4001	30	Out

The Flag output is capable of driving up to three 1000 Ω meter loads. When valid information is present (Flag OUT OF VIEW) the Flag output is $375 \pm 80 \text{ mV}_{\text{DC}}$. When invalid information is present (Flag IN VIEW) the Flag output is $0 \pm 25 \text{ mV}_{\text{DC}}$.

4.4.2.4 Superflags

Pin Name	Connector	Pin	I/O
MAIN LATERAL SUPERFLAG	P4001	17	Out
MAIN VERTICAL SUPERFLAG	P4001	18	Out

The output supplies not less than 500 mA on a 28 volt system and 250 mA on a 14 volt system with the output voltage not less than (AIRCRAFT POWER – 1.5 V_{DC}) when the flag is to be OUT OF VIEW. The output voltage with respect to ground is less than 0.25 V_{DC} when the flag is to be IN VIEW.

4.4.2.5 OBS

Pin Name	Connector	Pin	I/O
MAIN OBS ROTOR C	P4001	31	Out
MAIN OBS ROTOR H (GROUND)	P4001	32	Out
MAIN OBS STATOR D	P4001	33	In
MAIN OBS STATOR E (2.5V COMMON OBS)	P4001	34	Out
MAIN OBS STATOR F	P4001	35	In
MAIN OBS STATOR G (2.5V COMMON OBS)	P4001	36	Out

MAIN OBS ROTOR C and H are a buffered output that is intended to drive the OBS rotors. MAIN OBS STATOR D and MAIN OBS STATOR F are each phase and amplitude shifted version of the MAIN ROTOR C output. Each pair is intended to read one of the two windings of the indicator's OBS stator.

4.4.3 Main Indicator Configuration

Refer to section 5.2.9 for the main CDI/OBS configuration.

4.4.4 Main Indicator Calibration and Checkout

Refer to section 5.2.9 for the main CDI/OBS checkout.

4.4.5 Main Indicator Interconnect

Refer to Figure 4-7 on page 4-33 for the generic main indicator interconnect. Refer to Figure 4-8 on page 4-35 for the interconnect between a GNS 430 and a Bendix/King KI 209A. Refer to Figure 4-9 on page 4-37 for the interconnect between a GPS 400 or GNC 420 and a Bendix/King KI 208A.

4.5 ANNUNCIATORS/SWITCHES

4.5.1 Annunciators/Switches Function

NOTE

Initial certification of the 400 Series units was accomplished without use of any remote switches or annunciators, since the same switching and annunciation is available on the front panel of the 400 Series unit. However, if the 400 Series unit is not installed in the pilot's normal field of view, some or all of the remote switches and annunciators may be required by your certification agency. Appendix B includes an FAA letter granting permission to install GNS 430 without external switches and annunciators.

4.5.1.1 MESSAGE ANNUNCIATE

When a new status message is available, the Message Annunciator flashes. When status messages remain effective, the Message Annunciator illuminates.

4.5.1.2 WAYPOINT ANNUNCIATE

The waypoint annunciator output is driven in the following manner:

1. When the aircraft is within 10 seconds of reaching the turning point for a course change, the waypoint annunciator flashes.
2. When the aircraft is in a turn, the waypoint annunciator illuminates and remains illuminated until the turn is completed.
3. When a user arrival alarm is set and the aircraft is within the circle defined by the arrival alarm radius at the arrival waypoint, the waypoint annunciator flashes for 10 seconds.
4. When a user arrival alarm is not set and the aircraft is within 10 seconds of reaching the arrival waypoint, the waypoint annunciator flashes.

4.5.1.3 CDI SOURCE SELECT (GNS 430 Only)

This discrete input may be used to toggle between display of GPS and VOR/LOC/Glideslope information on the MAIN external CDI/HSI. A momentary low on this pin performs the same function as pressing the 'CDI' key on the GNS 430 bezel.

4.5.1.4 VLOC ANNUNCIATE (GNS 430 Only)

This annunciator output is driven when the unit is configured with a single CDI/HSI and the VOR/ILS data is being displayed on the CDI/HSI. This output will parallel the VLOC annunciator on the display.

4.5.1.5 GPS ANNUNCIATE (GNS 430 Only)

This annunciator output is driven when the unit is configured with a single CDI/HSI and the GPS data is being displayed on the CDI/HSI. This output will parallel the GPS annunciation on the display.

4.5.1.6 OBS MODE SELECT

This discrete input may be used to toggle between GPS OBS and GPS AUTO modes of operation. A momentary low on this pin performs the same function as pressing the 'OBS' key on the 400 Series unit.

4.5.1.7 AUTO ANNUNCIATE

This annunciator output is driven to indicate GPS AUTO mode of operation. This output will be active when neither the OBS nor SUSP annunciations are on the display.

4.5.1.8 OBS ANNUNCIATE

This annunciator output is driven to indicate GPS OBS mode of operation. This output will be active when the OBS or SUSP annunciation is on the display.

4.5.1.9 TERMINAL ANNUNCIATE

When performing approach navigation, the terminal annunciator is illuminated when operating within 30 nautical miles of the departure or arrival airport and the CDI scale is the equivalent or 1.0 nm or less..

4.5.1.10 APPROACH ANNUNCIATE

When performing approach navigation, the approach annunciator illuminates when approach is active.

4.5.1.11 INTEGRITY ANNUNCIATE

The integrity annunciator illuminates when the GPS receiver detects a position error, or is unable to calculate the integrity of the position.

4.5.1.12 ILS/GPS APPROACH Output

Sinks 500 mA when GPS navigation is selected and GPS approach is active or when VLOC navigation is selected and an ILS channel has been selected. This output may be connected to the ILS Engage input of an autopilot or flight director to provide higher autopilot gain while the 400 Series unit is operating in the ILS or GPS Approach modes of operation.

4.5.1.13 DEMO MODE SELECT

This discrete input may be used to select Demo Mode on the 400 Series unit. A low on this pin at time of unit power-up invokes the Demo Mode. Demo Mode allows the 400 Series unit to simulate reception of GPS satellite signals.

CAUTION

Do not connect DEMO MODE SELECT in an aircraft installation.

4.5.1.14 TIME MARK OUT

Time Mark Out is a time reference pulse output once per second, derived from GPS satellite signals.

4.5.2 Annunciators/Switches Electrical Characteristics

4.5.2.1 Annunciators

Pin Name	Connector	Pin	I/O
VLOC ANNUNCIATE	P4001	1	Out
GPS ANNUNCIATE	P4001	2	Out
WAYPOINT ANNUNCIATE	P4001	3	Out
TERMINAL ANNUNCIATE	P4001	4	Out
APPROACH ANNUNCIATE	P4001	5	Out
MESSAGE ANNUNCIATE	P4001	6	Out
OBS ANNUNCIATE	P4001	7	Out
AUTO ANNUNCIATE	P4001	8	Out
INTEGRITY ANNUNCIATE	P4001	9	Out
ILS/GPS APPROACH	P4001	14	Out

All outputs sink up to 500 mA when activated.

4.5.2.2 Switch Inputs

Pin Name	Connector	Pin	I/O
OBS MODE SELECT	P4001	71	In
CDI SOURCE SELECT	P4001	73	In
DEMO MODE SELECT	P4001	75	In

These inputs are considered active if either the voltage to ground is $< 1.9\text{ V}$ or the resistance to ground is $< 375\ \Omega$. These inputs are considered inactive if the voltage to ground is 11-33 V_{DC} .

4.5.2.3 TIME MARK OUT

Pin Name	Connector	Pin	I/O
TIME MARK OUT	P4001	16	Out

TIME MARK OUT outputs a $1\text{ ms} \pm 1\ \mu\text{s}$ wide pulse once every $1.0\text{ s} \pm 2\text{ ms}$. TIME MARK OUT is a logic level output, capable of sourcing 1 mA at up greater than 3.8 V and sinking 1 mA at less than 0.4 V.

4.5.3 Annunciators/Switches Configuration

None.

4.5.4 Annunciators/Switches Calibration and Checkout

Refer to section 5.2.7 for the switches checkout. Refer to section 5.2.8 for the annunciators checkout.

4.5.5 Annunciators/Switches Interconnect

Refer to Figure 4-10 on page 4-39 for the annunciators/switches interconnect.

4.6 SERIAL DATA

4.6.1 Serial Data Function

4.6.1.1 RS-232

The 400 Series unit is capable of interfacing with other aviation instruments by transmitting RS-232 Type 1 (often known as ARNAV format) and Type 2 (often known as Northstar format) data on the GPS RS 232 OUT 1 port. The data consists of the following (refer to Appendix C for a detailed data format description):

Current latitude, longitude, and GPS altitude in feet (see Note below)
Current velocity vector (groundspeed and direction of velocity vector over the ground)
Distance, bearing, desired track, and cross track error to destination waypoint
Destination waypoint identifier, sequence in route, position (latitude and longitude), and magnetic variation
Magnetic variation and navigation and warning status

NOTE

Aviation RS-232 data may be transmitted with or without the current GPS altitude in feet. Refer to section 5.2.2.

The 400 Series unit can receive pressure altitude, air data, and fuel data from certain systems on the GPS RS 232 IN 1 port.

The 400 Series unit can communicate with a Ryan TCAD 9900B system using the GPS RS 232 OUT 2 and GPS RS 232 IN 2 lines to display traffic information on the 400 Series unit.

If two 400 Series units are installed in an aircraft, the GPS RS 232 OUT 3 and GPS RS 232 IN 3 lines may be cross-connected to crossfill flight plans and user-defined waypoints from one 400 Series unit to the other.

The 400 Series unit can communicate with a BF Goodrich WX-500 Stormscope using the GPS RS 232 OUT 4 and GPS RS 232 IN 4 lines to display lightning strike information on the 400 Series unit.

4.6.1.2 ARINC 429

The data output on the GPS ARINC 429 OUT port depends on the configuration (refer to section 5.2.1). Below is a list of the configurations and the labels output for each one:

1. ARINC 429
2. GAMA 429
3. GAMA 429 Graphics
4. GAMA 429 Graphics w/Int

Label #	Parameter Name	1	2	3	4
001	Distance to Go (BCD)	•	•	•	•
002	Time to Go (BCD)	•	•	•	•
012	Ground Speed (BCD)	•	•	•	•
074G	Data Record Header		•	•	•
075G	Active Wpt From/To Data		•	•	•
100	Selected Course 1	•			
100G	Selected Course 1		•	•	•
113G	Message Checksum		•	•	•
114	Desired Track (True)	•	•	•	•
115	Waypoint Bearing (True)	•	•	•	•
116	Cross Track Distance	•			
116G	Cross Track Distance		•	•	•
121	Horizontal Command (to Autopilot)	•	•	•	•
125	Greenwich Mean Time (BCD)	•	•	•	•
147G	Magnetic Variation		•	•	•

Label #	Parameter Name	1	2	3	4
251	Distance to Go	•			
251G	Distance to Go		•	•	•
252	Time to Go		•	•	•
260G	Date (BCD)		•	•	•
261G	GPS Discrete Word 1		•	•	•
275G	LRN Status Word		•	•	•
300G	Station Declination, Type, and Class		•	•	•
303	Message Length/Type/Number		•	•	•
304G	Message Characters 1-3		•	•	•
305G	Message Characters 4-6		•	•	•
306G	NAV/Waypoint/Airport Latitude		•	•	•
307G	NAV/Waypoint/Airport Longitude		•	•	•
310	Present Position Latitude	•	•	•	•
311	Present Position Longitude	•	•	•	•
312	Ground Speed	•	•	•	•
313	Track Angle (True)	•	•	•	•
314	True Heading	•	•	•	•
315	Wind Speed	•	•	•	•
316	Wind Angle (True)	•	•	•	•
320	Magnetic Heading	•	•	•	•
321	Drift Angle	•	•	•	•
326G	Lateral Scale Factor		•	•	•
330	Conic Arc Inbound Course			•	•
331	Conic Arc Radius			•	•
332	Conic Arc Course Change Angle			•	•
333	Airport Runway Azimuth			•	•
334	Airport Runway Length in Feet			•	•
335	Left/Right Hand Holding Pattern Azimuth			•	•
340	Left/Right Hand Procedure Turn Azimuth			•	•
351G	Distance To Destination (Via Flight Plan)		•	•	•
352G	Estimated Time To Destination (Via Flight Plan)		•	•	•
371G	Specific Equipment ID		•	•	•
377	Equipment Hex ID Code	•	•	•	•

The following labels are output on the VOR/ILS ARINC 429 OUT port:

Label #	Parameter Name
034G	VOR/ILS Frequency (BCD)
035G	DME Frequency (BCD)
100G	Selected Course #1
173	Localizer Deviation
174	Glideslope Deviation
222	VOR Omnibearing
371G	Specific Equipment ID
377	Equipment Hex ID Code

The labels recognized on the GPS ARINC 429 IN 1 or GPS ARINC 429 IN 2 ports depend on the configuration (refer to section 5.2.1).

The 400 Series unit can receive traffic data from a BF Goodrich SKY497 Skywatch system using the GPS ARINC 429 IN 1 or GPS ARINC 429 IN 2 lines, in order to display traffic information on the 400 Series unit.

4.6.2 Serial Data Electrical Characteristics

4.6.2.1 RS-232

Pin Name	Connector	Pin	I/O
GPS RS 232 OUT 1	P4001	56	Out
GPS RS 232 IN 1	P4001	57	In
GPS RS 232 OUT 3	P4001	41	Out
GPS RS 232 IN 3	P4001	42	In

The RS-232 outputs conform to EIA Standard RS-232C with an output voltage swing of at least ± 5 V when driving a standard RS-232 load.

4.6.2.2 ARINC 429

Pin Name	Connector	Pin	I/O
GPS ARINC 429 OUT A	P4001	46	Out
GPS ARINC 429 OUT B	P4001	47	Out
GPS ARINC 429 IN 1 A	P4001	48	In
GPS ARINC 429 IN 1 B	P4001	49	In
GPS ARINC 429 IN 2 A	P4001	50	In
GPS ARINC 429 IN 2 B	P4001	51	In
VOR/ILS ARINC 429 OUT A	P4006	24	Out
VOR/ILS ARINC 429 OUT B	P4006	23	Out
VOR/ILS ARINC 429 IN A	P4006	36	In
VOR/ILS ARINC 429 IN B	P4006	35	In

The GPS and VOR/ILS ARINC 429 outputs conform to ARINC 429 electrical specifications when loaded with up to 5 standard ARINC 429 receivers.

4.6.3 Serial Data Configuration

Refer to section 5.2.1 for the main (GPS) ARINC 429 configuration. Refer to sections 5.2.14, 5.2.15, and 5.2.16 for the Stormscope configuration. Refer to section 5.2.17 for the Skywatch configuration. Refer to sections 5.2.17 and 5.2.18 for the TCAD configuration.

4.6.4 Serial Data Calibration and Checkout

Refer to section 5.3.2 for the serial data checkout. Refer to sections 5.2.14, 5.2.15, and 5.2.16 for the Stormscope checkout. Refer to section 5.2.17 for the Skywatch checkout. Refer to sections 5.2.17 and 5.2.18 for the TCAD checkout.

4.6.5 Serial Data Interconnect

Refer to Figure 4-11 on page 4-41 for the RS-232 serial data interconnect. Refer to Figure 4-12 on page 4-43 for the ARINC 429 Bendix/King EFS 40/50 interconnect. Refer to Figures 4-13, 4-14 and 4-145 starting on page 4-45 for the ARINC 429 Sandel EHSI interconnect. Refer to Figure 4-16 on page 4-51 for the ARINC 429 air data/IRU/AHRS interconnect. Refer to Figure 4-17 on page 4-53 for the ARINC 429 flight control interconnect. Refer to Figure 4-18 on page 4-55 for the Weather and Traffic Interconnect.

4.7 COM/VOR/ILS AUDIO (GNC 420 AND GNS 430 ONLY)

4.7.1 COM/VOR/ILS Audio Function

Activation of COM MIC KEY enables COM MIC AUDIO and causes the transceiver to transmit.

500 Ω COM AUDIO and 500 Ω VOR/ILS AUDIO are 100 mW audio outputs that are intended to drive a headset or an audio panel.

A momentary low on COM REMOTE TRANSFER toggles the active and standby COM frequencies. A momentary low on VLOC REMOTE TRANSFER toggles the active and standby VLOC frequencies.

The COM REMOTE TRANSFER input may be used for emergency operation of the COM transmitter. If the remote transfer switch is active for two seconds, the active COM frequency will change to 121.50 MHz. Once the emergency frequency is activated through COM REMOTE TRANSFER, GNS 430 and GNC 420 COM transceivers with Mod 2 incorporated will ignore inputs from the front panel controls. The pilot may exit this independent mode—restoring control to the front panel knobs and buttons—by momentarily activating the COM REMOTE TRANSFER switch.

When TRANSMIT INTERLOCK is active, the GNC 420 or GNS 430 COM receiver sensitivity is decreased. This input is intended to reduce interference from other transmitters in the aircraft. The TRANSMIT INTERLOCK input should be connected to the PTT input of other transmitters in the aircraft. If connected to multiple PTT inputs, these connections must include diode isolation or multiple radios will transmit simultaneously.

4.7.2 COM/VOR/ILS Audio Electrical Characteristics

4.7.2.1 COM MIC KEY

Pin Name	Connector	Pin	I/O
COM MIC KEY	P4002	4	In

This input is considered active if either the voltage to ground is < 1.9 V or the resistance to ground is < 375 Ω . This input is considered inactive if the voltage to ground is 11-33 V_{DC}.

4.7.2.2 COM MIC AUDIO, INTERCOM MIC AUDIO

Pin Name	Connector	Pin	I/O
COM MIC AUDIO HI	P4002	6	In
COM MIC AUDIO LO	P4002	18	In
INTERCOM MIC HI	P4002	5	In
INTERCOM MIC LO	P4002	17	In

COM MIC AUDIO and INTERCOM MIC each have a 520 Ω AC input impedance and supply the microphone with a 9 V bias through 620 Ω .

COM MIC AUDIO is set in the factory such that 275 mV_{RMS} will modulate the transmitter to 80% nominally. The microphone gain adjustment is accessible through the top cover.

When a 125 mV_{RMS} signal at 1000 Hz is applied to the INTERCOM MIC input, the level on the COM AUDIO output is not less than 7.07 V_{RMS}.

4.7.2.3 COM AUDIO, VOR/ILS AUDIO

Pin Name	Connector	Pin	I/O
500Ω COM AUDIO HI	P4002	7	Out
500Ω COM AUDIO LO	P4002	19	Out
500Ω VOR/ILS AUDIO HI	P4006	16	Out
500Ω VOR/ILS AUDIO LO	P4006	17	Out

500Ω COM AUDIO and 500Ω VOR/ILS AUDIO each supply 100 mW into a 500 Ω load. These are balanced outputs and the LO output must be connected.

500Ω COM AUDIO is the summation of the COM receiver audio, COM sidetone audio, and INTERCOM MIC audio.

4.7.2.4 DISCRETE INPUTS

Pin Name	Connector	Pin	I/O
TRANSMIT INTERLOCK	P4002	14	In
COM REMOTE TRANSFER	P4002	15	In
VLOC REMOTE TRANSFER	P4006	28	In

These inputs are considered active if either the voltage to ground is < 1.9 V or the resistance to ground is < 375 Ω. These inputs are considered inactive if the voltage to ground is 11-33 V_{DC}.

COM REMOTE TRANSFER and VLOC REMOTE TRANSFER are momentary inputs.

4.7.3 COM/VOR/ILS Audio Configuration

None.

4.7.4 COM/VOR/ILS Audio Calibration and Checkout

Refer to section 5.2.10 for the COM calibration.

4.7.5 COM/VOR/ILS Audio Interconnect

Refer to Figure 4-19 on page 4-57 for the audio panel interconnect.

4.8 VOR/ILS INDICATOR (GNS 430 ONLY)

4.8.1 VOR/ILS Indicator Function

NOTE

Because the GNS 430 includes a “CDI” button that performs switching between GPS and VOR/ILS on a remote indicator, it is seldom necessary to use these outputs to drive an indicator. It is only necessary when it is desired for a separate indicator to display VOR/ILS deviation full-time (regardless of the “CDI” button status).

The VOR/ILS indicator displays both lateral and vertical, To/From indications, lateral and vertical flags and superflags. GNS 430 connector 4006 always outputs the VOR/Localizer/Glideslope navigation information. The VOR/ILS pins on GNS 430 connector 4006 are used to drive an indicator that displays VOR/ILS information at all times, regardless of the CDI selection on the GNS 430.

VOR/LOC COMPOSITE OUT is a standard VOR/Localizer Composite output signal which may be used to drive the Left/Right, TO/FROM, and Flag indications of certain navigation indicators that contain an internal converter.

The ILS ENERGIZE output will go low when the VLOC frequency is channeled to a localizer channel.

4.8.2 VOR/ILS Indicator Electrical Characteristics

4.8.2.1 Superflags

Pin Name	Connector	Pin	I/O
VOR/LOC SUPERFLAG	P4006	15	Out
GLIDESLOPE SUPERFLAG	P4006	38	Out

The output supplies not less than 500 mA on a 28 volt system and 250 mA on a 14 volt system with the output voltage not less than (AIRCRAFT POWER - 3 V_{DC}) when the flag is to be OUT OF VIEW. The output voltage with respect to ground is less than 3 V_{DC} when the flag is to be IN VIEW.

4.8.2.2 Deviation

Pin Name	Connector	Pin	I/O
VOR/LOC +LEFT	P4006	5	Out
VOR/LOC +RIGHT (VOR/LOC COMMON)	P4006	6	Out
GLIDESLOPE +UP	P4006	32	Out
GLIDESLOPE +DOWN/-FLAG (GLIDESLOPE COMMON)	P4006	31	Out

The deviation outputs are each capable of driving up to three 1000 Ω meter loads with ± 150 mV_{DC} $\pm 10\%$ with respect to 2.5V Common for full-scale deflection. The drive circuit provides for more than full-scale deflection with a maximum course deviation output voltage of ± 300 mV_{DC} $\pm 10\%$.

4.8.2.3 TO/FROM

Pin Name	Connector	Pin	I/O
VOR/LOC +TO	P4006	1	Out
VOR/LOC +FROM (VOR/LOC COMMON)	P4006	2	Out

The output is capable of driving up to three 200 Ω meter loads. When indicating TO, the output is $+225 \pm 75$ mV_{DC}. When indicating FROM, output is -225 ± 75 mV_{DC}. When invalid information is present (Flag IN VIEW) the TO/FROM output is 0 ± 10 mV_{DC}.

4.8.2.4 Flag

Pin Name	Connector	Pin	I/O
VOR/LOC +FLAG	P4006	3	Out
VOR/LOC -FLAG (VOR/LOC COMMON)	P4006	4	Out
GLIDESLOPE +FLAG	P4006	30	Out
GLIDESLOPE +DOWN/-FLAG (GLIDESLOPE COMMON)	P4006	31	Out

The Flag output is capable of driving up to three 1000 Ω meter loads. When valid information is present (Flag OUT OF VIEW) the Flag output is 375 ± 80 mV_{DC}. When invalid information is present (Flag IN VIEW) the Flag output is 0 ± 25 mV_{DC}.

4.8.2.5 OBS

Pin Name	Connector	Pin	I/O
VOR OBS ROTOR C	P4006	9	Out
VOR OBS ROTOR H (GROUND)	P4006	10	Out
VOR OBS STATOR D	P4006	13	In
VOR OBS STATOR F	P4006	12	In
VOR OBS STATOR E/G (VOR/LOC COMMON)	P4006	11	Out

VOR OBS ROTOR C and H are a buffered 500 Hz output that is intended to drive the OBS rotors. VOR OBS STATOR D and VOR OBS STATOR F are each phase and amplitude shifted version of the VOR ROTOR C output. Each pair is intended to read one of the two windings of the indicator's OBS stator.

4.8.2.6 VOR/LOC COMPOSITE

Pin Name	Connector	Pin	I/O
VOR/LOC COMPOSITE OUT	P4006	8	Out

With a Standard VOR Test Signal applied, VOR/LOC COMPOSITE OUT will be 0.5 ± 0.1 V_{RMS} into a 10 k Ω load. With a Standard Localizer Centering Test Signal applied, VOR/LOC COMPOSITE OUT will be 0.350 ± 0.05 V_{RMS} into a 10 k Ω load.

4.8.2.7 ILS ENERGIZE

Pin Name	Connector	Pin	I/O
ILS ENERGIZE	P4006	29	Out

The driver output voltage is not more than 1.0 V when sinking 20 mA. The maximum off state leakage current with respect to GND is less than 10 μ A.

4.8.3 VOR/ILS Indicator Configuration

Refer to section 5.2.12 for the VOR/LOC/GS configuration.

4.8.4 VOR/ILS Indicator Calibration and Checkout

Refer to section 5.2.12 for the VOR/LOC/GS checkout.

4.8.5 VOR/ILS Indicator Interconnect

Refer to Figure 4-20 on page 4-59 for the VOR/ILS indicator interconnect.

4.9 RMI/OBI

4.9.1 RMI/OBI Function

The MAIN OBI output provides bearing information from the active waypoint for Bendix/King Serial OBI devices based upon the 400 Series unit's GPS navigation. For the GNS 430, the MAIN OBI output may be configured so that it sends VOR/ILS bearing information when VLOC is selected by the GNS 430 CDI key.

The VOR OBI output provides bearing information from the active waypoint for Bendix/King Serial OBI devices based upon the GNS 430 VOR receiver.

When a localizer channel is tuned on the VLOC window, there is a bit in the data stream set to indicate that a localizer frequency is tuned which will stow the needle or drive it to the 3 o'clock position.

4.9.2 RMI/OBI Electrical Characteristics

Pin Name	Connector	Pin	I/O
MAIN OBI CLOCK	P4001	43	Out
MAIN OBI SYNC	P4001	45	Out
MAIN OBI DATA	P4001	44	Out

Pin Name	Connector	Pin	I/O
VOR OBI CLOCK	P4006	25	Out
VOR OBI SYNC	P4006	26	Out
VOR OBI DATA	P4006	27	Out

The output driver is active low. The driver output voltage is not more than 1.0 V when sinking 20 mA_{DC}. The maximum off state leakage current with respect to ground is less than 10 µA_{DC}.

4.9.3 RMI/OBI Configuration

For the GNS 430, refer to section 5.2.9 for the MAIN OBI source configuration.

4.9.4 RMI/OBI Calibration and Checkout

None.

4.9.5 RMI/OBI Interconnect

Refer to Figure 4-21 on page 4-61 for the RMI/OBI interconnect.

4.10 DME TUNING (GNS 430 ONLY)

4.10.1 DME Tuning Function

The GNS 430 can channel a DME based on the tuned VLOC frequency. The GNS 430 outputs 2 of 5, BCD or Slip parallel DME and King Serial DME channeling format. When DME COMMON is held low, the GNS 430 will actively tune the DME.

4.10.2 DME Tuning Electrical Characteristics

4.10.2.1 Parallel DME Tuning

Pin Name	Connector	Pin	I/O
NAV PAR DME - 8MHZ	P4006	14	Out
SER DME – CHAN REQ/PAR DME - 4MHZ	P4006	20	Out*
SER DME – RNAV MODE/PAR DME - 2MHZ	P4006	21	Out*
NAV PAR DME - 1MHZ	P4006	33	Out
NAV PAR DME - 800KHZ	P4006	37	Out
NAV PAR DME - 400KHZ	P4006	39	Out
NAV PAR DME - 200KHZ	P4006	40	Out
NAV PAR DME - 100KHZ	P4006	42	Out
NAV PAR DME - 50KHZ	P4006	43	Out
NAV DME COMMON	P4006	22	In

* These pins are outputs when the GNS 430 is configured for 2 of 5 parallel DME tuning.

For each of the parallel DME tuning discrete outputs, the driver output voltage is not more than 1.0 V while sinking 20 mA. The maximum off state leakage current with respect to ground is less than 10 μ A.

NAV DME COMMON must be pulled low to indicate to the NAV module that it is the device channeling the DME.

NAV DME COMMON is considered active if either the voltage to ground is < 1.9 V or the resistance to ground is < 375 Ω . These inputs are considered inactive if the voltage to ground is 11-33 V_{DC} .

4.10.2.2 King Serial DME Tuning

Pin Name	Connector	Pin	I/O
NAV SER DME - DATA	P4006	19	Out
NAV SER DME - CLOCK	P4006	18	Out
SER DME – CHAN REQ/PAR DME - 4MHZ	P4006	20	In*
SER DME – RNAV MODE/PAR DME – 2MHZ	P4006	21	In*
NAV DME COMMON	P4006	22	In

* These pins are inputs when the GNS 430 is configured for King Serial DME tuning

When NAV SER DME – DATA or NAV SER DME – CLOCK is asserted high and driving a 360 Ω load, the driver output voltage is not less than 8 V, and when asserted low shall not be greater than 10 mV.

SER DME – CHAN REQ/PAR DME – 4MHZ, SER DME – RNAV MODE/PAR DME – 2MHZ, and NAV DME COMMON are considered active if either the voltage to ground is < 1.9 V or the resistance to ground is < 375 Ω . These inputs are considered inactive if the voltage to ground is 11-33 V_{DC} .

NAV DME COMMON must be pulled low to indicate to the NAV module that it is the device channeling the DME.

4.10.3 DME Tuning Configuration

Refer to section 5.2.12 for the DME tuning configuration.

4.10.4 DME Tuning Calibration and Checkout

None.

4.10.5 DME Tuning Interconnect

Refer to Figure 4-22 on page 4-63 for the King Serial Panel DME tuning interconnect. Refer to Figure 4-23 on page 4-65 for the King Serial Remote DME tuning interconnect. Refer to Figure 4-24 on page 4-67 for the parallel 2 of 5 DME tuning interconnect. Refer to Figure 4-25 on page 4-69 for the parallel BCD/Slip Code DME tuning interconnect.

NOTE

For the GNS 430 to tune a Narco DME 890 or IDME 891 or an ARC (Cessna) RTA-576A using parallel 2 of 5, unique wiring and configuration are required. Refer to section 5.2.12 on page 5-9 and Figure 4-24 on page 4-67.

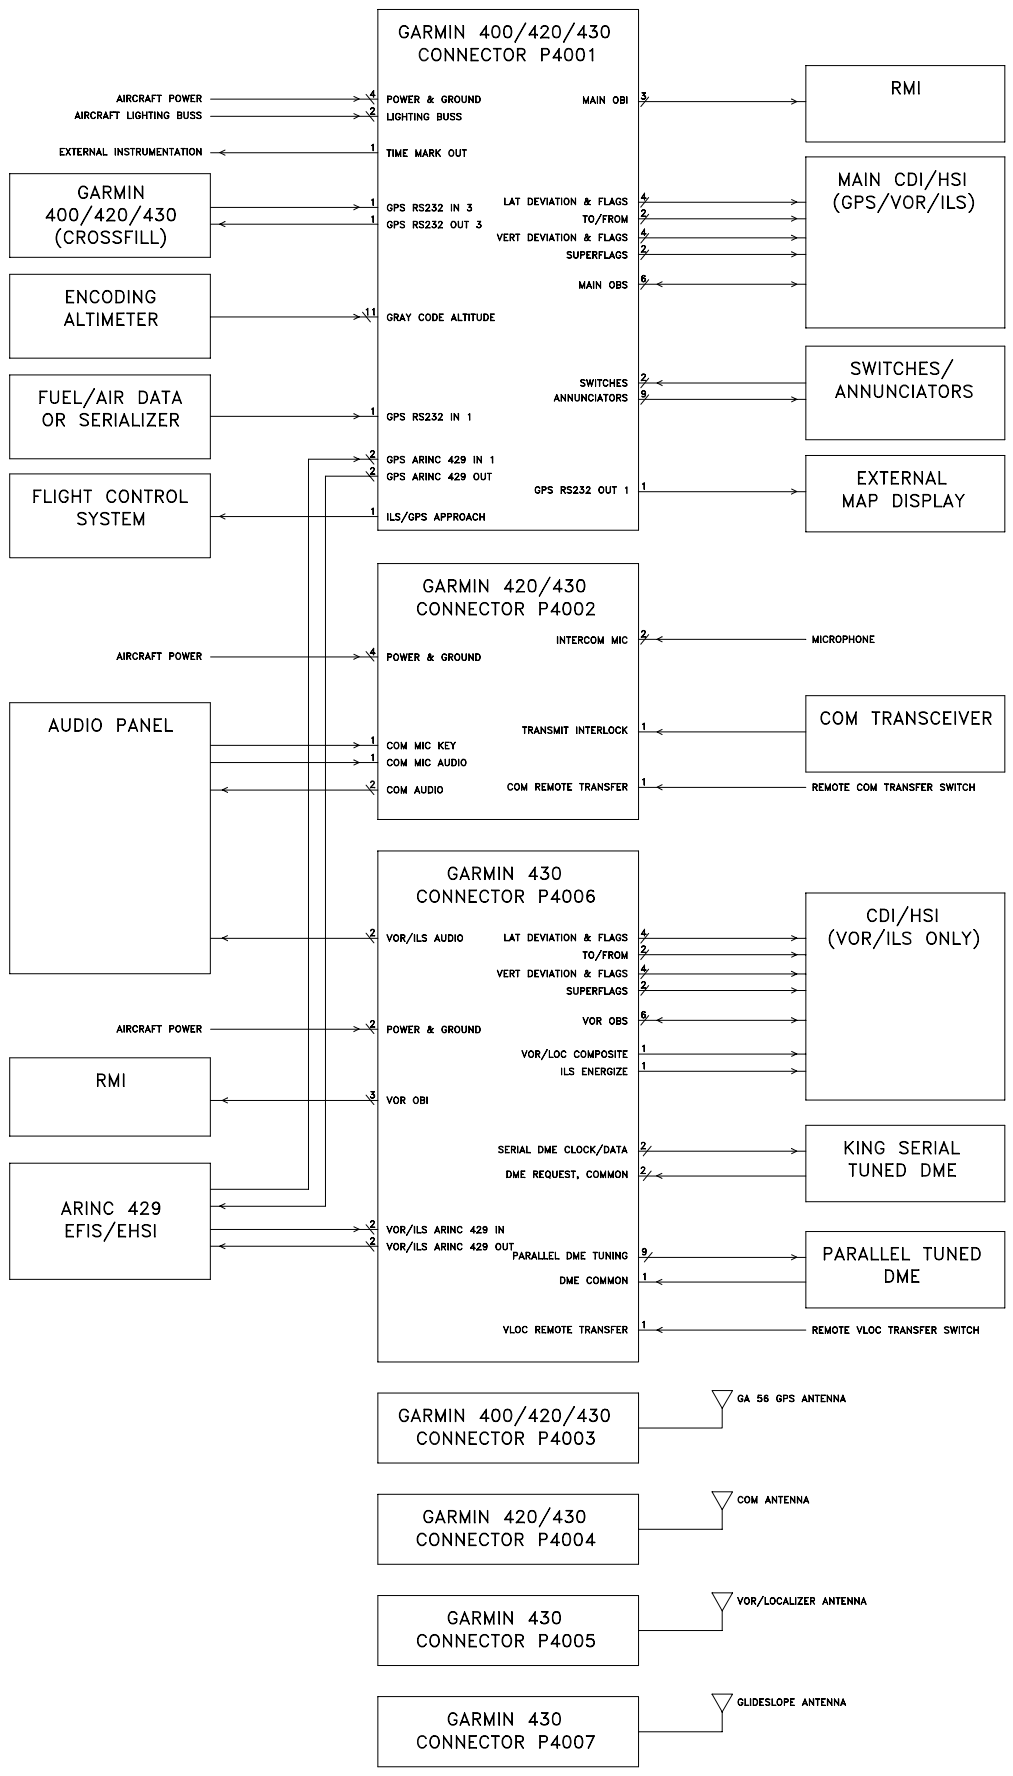


Figure 4-1. 400 Series System Interface Diagram

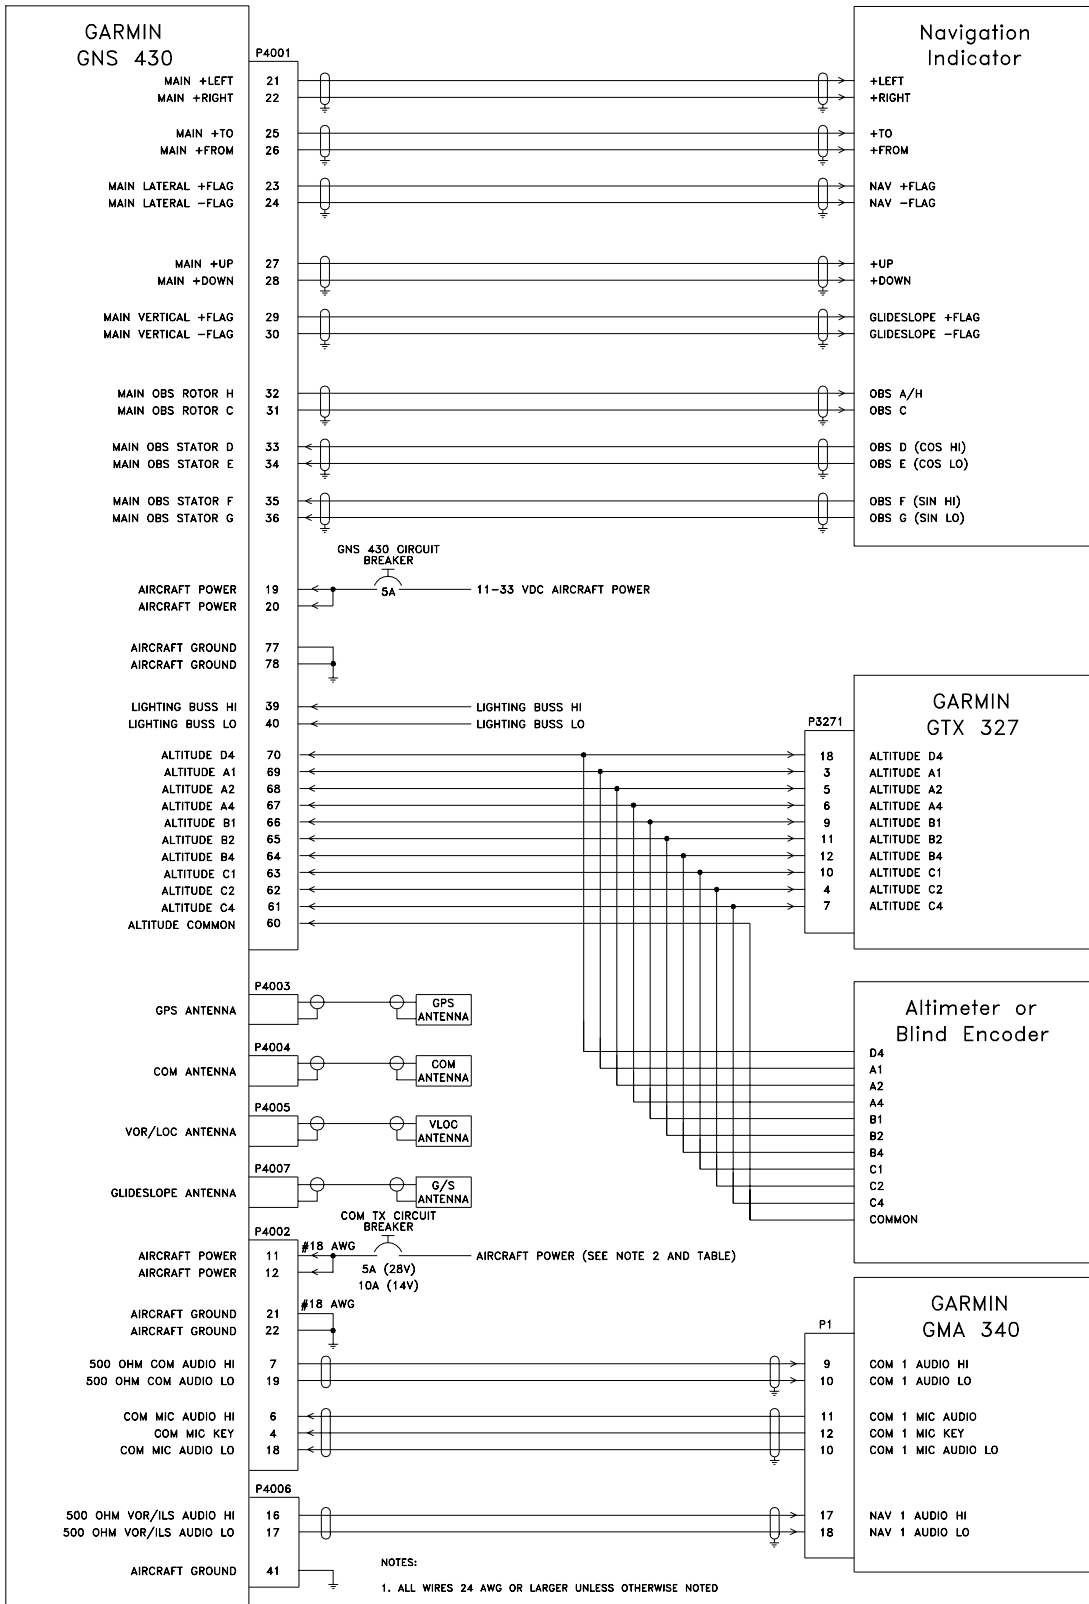


Figure 4-2. GNS 430 Typical Installation

NOTES:

1. ALL WIRES 24 AWG OR LARGER UNLESS OTHERWISE NOTED
2. AIRCRAFT POWER INPUT TO THE MAIN BOARD (P4001), AND THE GNS 430 VOR/ILS BOARD (P4006) MAY BE 11-33 VDC. THE AIRCRAFT POWER INPUT ON THE COM BOARD (P4002) IS DEPENDENT ON THE PART NUMBER OF THE UNIT:

GNS 430 P/N 011-00280-00	28 VOLTS DC
GNS 430 P/N 011-00280-10	11-33 VOLTS DC

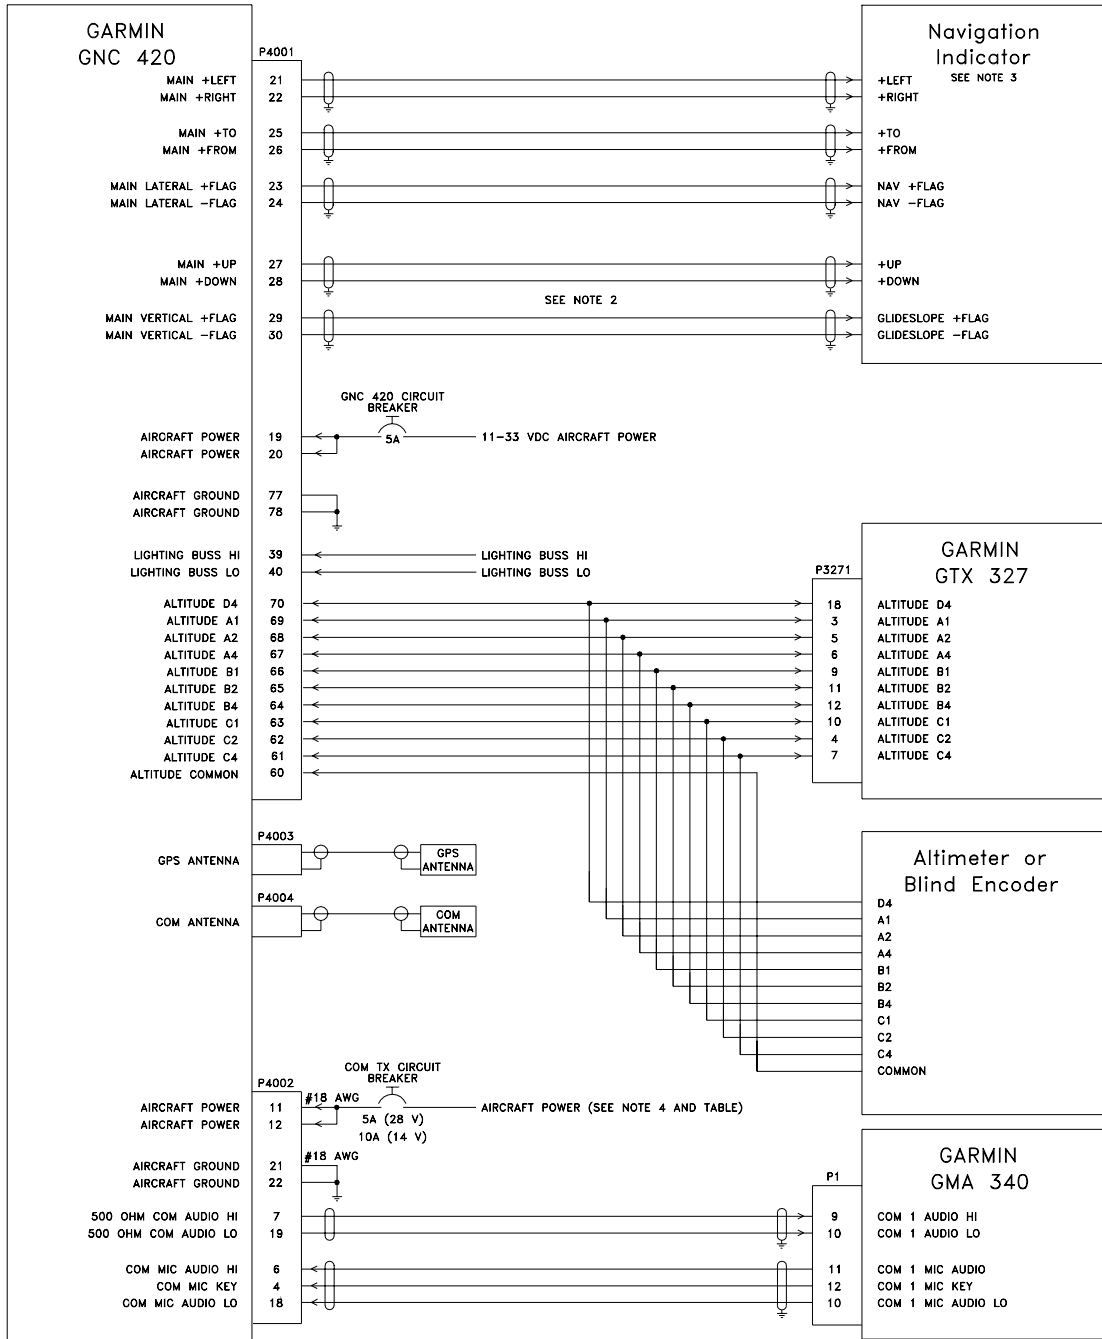


Figure 4-3. GNC 420 Typical Installation


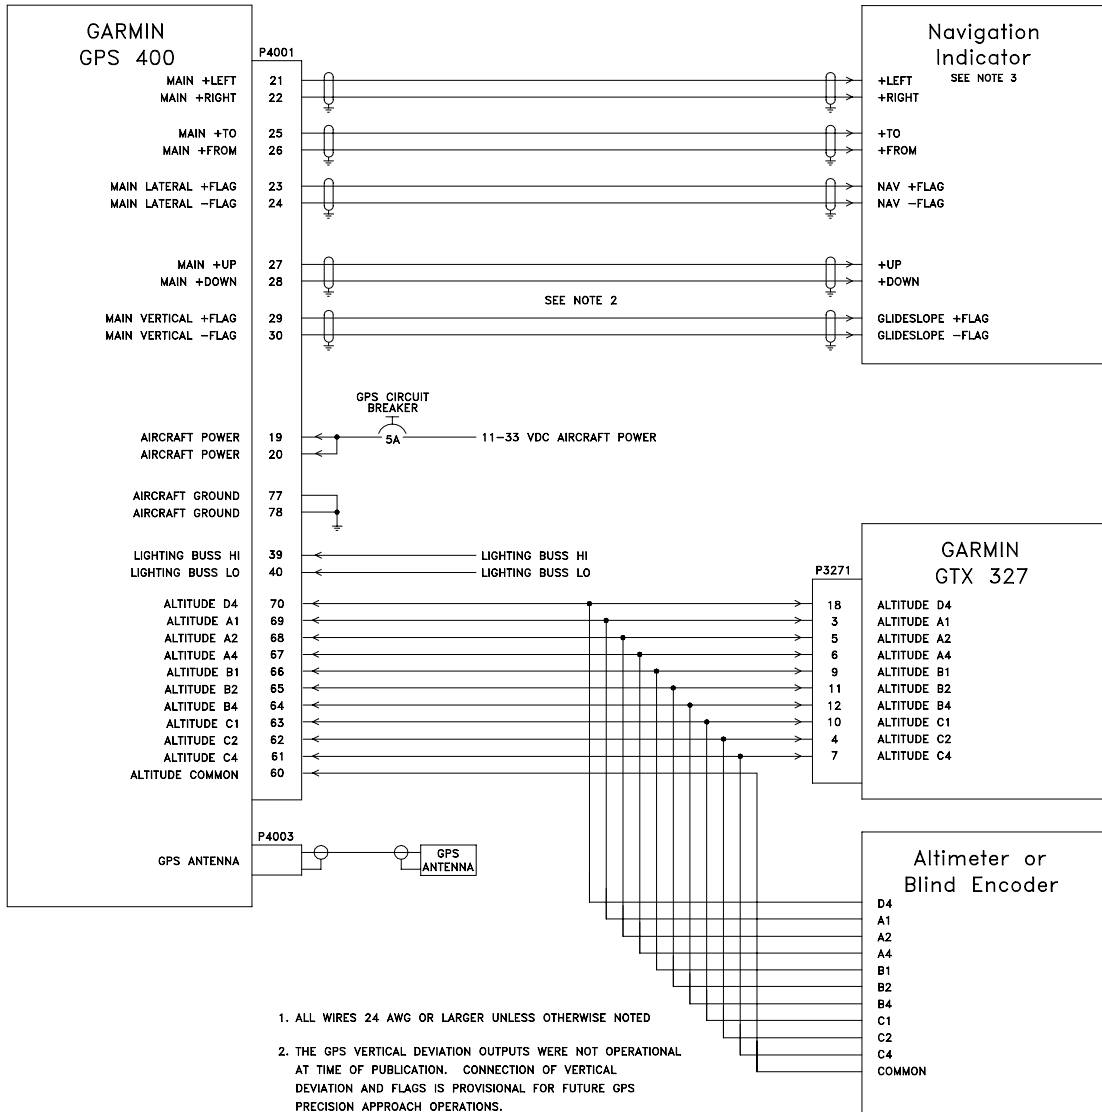


Figure 4-4. GPS 400 Typical Installation

4.11.3 Power, Lighting, and Antennas Interconnect

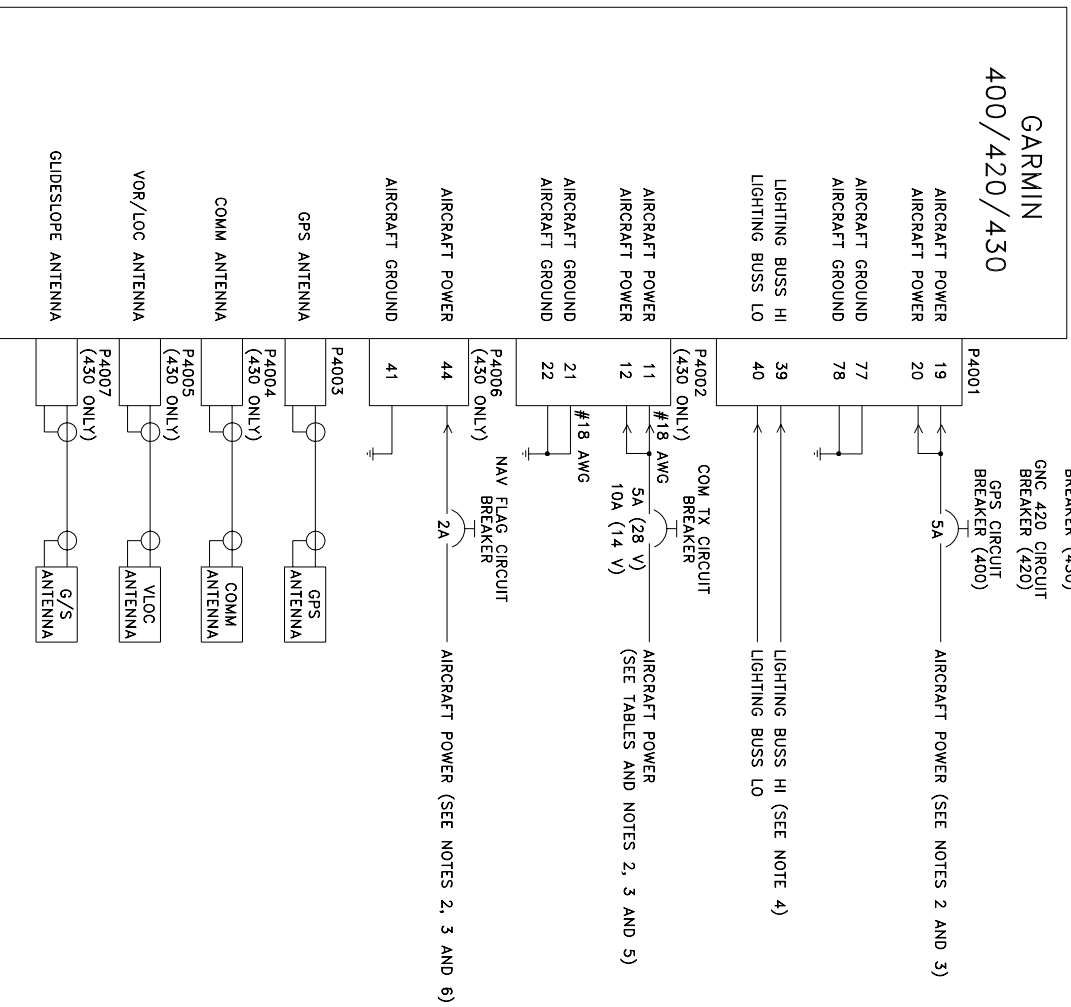


- NOTES:
1. ALL WIRES 24 AWG OR LARGER UNLESS OTHERWISE NOTED
 2. IF THE AIRCRAFT HAS MULTIPLE AIRCRAFT POWER BUSES, IT IS RECOMMENDED THAT ALL 400 SERIES UNIT POWER INPUTS BE CONNECTED TO THE SAME POWER BUSS.
- THE FOLLOWING TABLE SHOWS WHICH 400 SERIES UNIT FUNCTIONS DEPEND ON WHICH POWER INPUTS:
- | | |
|-------|---|
| P4001 | ALL 400 SERIES UNIT FUNCTIONS DEPEND ON THIS POWER INPUT. |
| P4002 | COM TRANSMITTER |
| P4006 | NAV SUPERFLAG, GLIDESLOPE SUPERFLAG |
3. AIRCRAFT POWER INPUT TO THE MAIN BOARD (P4001), AND THE GNS 430 VOR/ILS BOARD (P4006) MAY BE 11-33 VDC. THE AIRCRAFT POWER INPUT ON THE COM BOARD (P4002) IS DEPENDENT ON THE PART NUMBER OF THE UNIT:

GNS 430 P/N 011-00280-00	28 VOLTS DC
GNC 420 P/N 011-00506-00	
GNS 430 P/N 011-00280-10	11-33 VOLTS DC
GNC 420 P/N 011-00506-10	
 4. THE 400 SERIES UNIT SHOULD BE CONFIGURED FOR THE CORRECT LIGHTING BUSS VOLTAGE (28 VDC, 14 VDC, 5 VDC OR 5 VAC) POST-INSTALLATION. NO DAMAGE WILL OCCUR IF THE UNIT IS CONFIGURED INCORRECTLY. IN ADDITION, LIGHTING CAN BE SET TO AUTOMATICALLY COMPENSATE FOR AMBIENT LIGHTING CONDITIONS USING ITS PHOTOCELL. A MANUAL LIGHTING CONTROL OPTION IS ALSO AVAILABLE. REFER TO THE POST-INSTALLATION CONFIGURATION PROCEDURE.
 5. MAXIMUM ALLOWABLE WIRE GAUGE INTO P4002 PINS IS #22 AWG. FOR #18 AWG WIRE USE SPECIAL #18 AWG TERMINATION SOCKET CONTACT (356-00023-00) SUPPLIED WITH CONNECTOR KIT. PROTECT EXPOSED CONDUCTOR ON SPECIAL LARGE TERMINATION CONTACTS WITH 3/8" (1 cm) LENGTH OF SHRINK TUBING ALSO SUPPLIED WITH CONNECTOR KIT.
 6. THE AIRCRAFT POWER INPUT P4006-44 PROVIDES POWER FOR THE VOR/LOC SUPERFLAG (P4006-15) AND GLIDESLOPE SUPERFLAG (P4006-38) OUTPUTS. NO POWER CONNECTION IS REQUIRED ON P4006-44 IF THESE FLAG OUTPUTS ARE NOT USED.

Figure 4-5. Power, Lighting, and Antennas Interconnect

4.11.4 Altimeter Interconnect

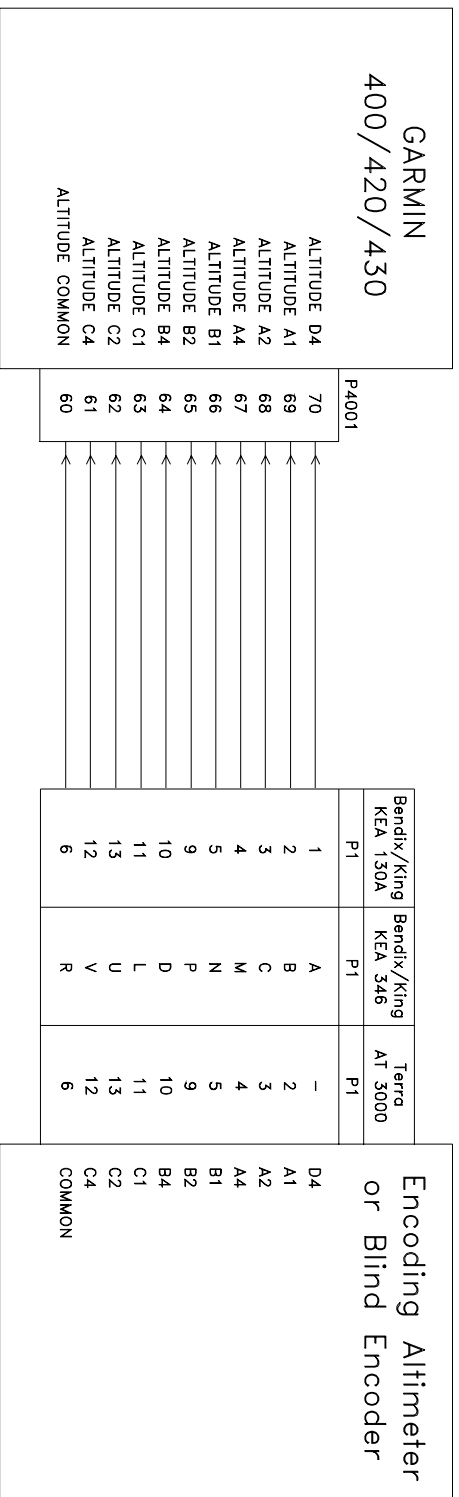

- NOTES:
1. ALL WIRES 24 AWG OR LARGER UNLESS OTHERWISE NOTED
 2. REFER TO MANUFACTURERS' DOCUMENTATION FOR COMPLETE PINOUT AND INTERCONNECT INFORMATION. PINOUTS OF OTHER UNITS SHOWN FOR REFERENCE ONLY.

Figure 4-6. Altimeter Interconnect

4.11.5 Main Indicator Interconnect


GARMIN 400/420/430		Navigation Indicator														
	P4001	GARMIN CI 102	GARMIN CI 102A	GARMIN CI 106	GARMIN CI 106A	S-Tac ST 180	Bandit/King KI 206	Bandit/King KI 525A	Bandit/King KI 552/8 KI 553 A/B	Century NSD130A 331A-6P NSD1000	Collins 331A-6P 331A-96 RD 550A	Collins RD 550A	Saerry RD 550A	Saerry RD 550		
		P1	P1	P1	P1	P1	P2061	P1	P2	P101	CO132	P1	P1	P2	P1	P2
MAIN +LEFT	21	11	11	11	11	27	N	V	J	17	29	4	F	4		
MAIN +RIGHT	22	12	12	12	12	43	J	B	H	18	28	3	E	3		
MAIN +TO	25	9	9	9	9	26	E	Z	J	33	26	1	A	1		
MAIN +FROM	26	10	10	10	10	42	S	T	K	34	27	2	B	2		
MAIN LATERAL +FLAG	23	7	7	7	7	37	N	K	F	31	31					
MAIN LATERAL -FLAG	24	8	8	8	8	38	F	F	G	32	32					
MAIN LATERAL SUPERFLAG	17	-	-	-	-	-	-	-	-	-	-	37	P	39		
MAIN +UP	27	-	-	-	-	44	K		JJ	27	33	5	S	36		
MAIN +DOWN	28	-	-	-	-	28	M	B	HH	28	34	6	D	5		
MAIN VERTICAL +FLAG	29	-	-	-	-	36	H	J	FF	30	35					
MAIN VERTICAL -FLAG	30	-	-	-	-	35	J	W	GG	29	36					
MAIN VERTICAL SUPERFLAG	18	-	-	-	-	-	-	-	-	-	-	7	U	38		
MAIN OBS ROTOR H	32	1	1	1	1	22	C	X	W	15	1	1	DD	6		
MAIN OBS ROTOR C	31	2	2	2	2	24	Z	A	N,V	16	3	3	FF	8		
MAIN OBS STATOR D	33	3	3	3	3	25	L	V	Z	24	4	4	Z	9		
MAIN OBS STATOR E	34	5	5	5	5	39	P	Y	A	23	5	5	AA	10		
MAIN OBS STATOR F	35	4	4	4	4	40	T	B	Y	26	6	6	BB	11		
MAIN OBS STATOR G	36	6	6	6	6	41	W	E	X	25	7	7	CC	12		
GPS ANNUNCIATE	2	-	-	-	-	-	-	-	-	-	-	-	-	-		
VLOC ANNUNCIATE	1	-	N/C	-	-	-	-	-	-	-	-	-	-	-		

- NOTES:
1. ALL WIRES 24 AWG OR LARGER UNLESS OTHERWISE NOTED
 2. P4001-2 (GPS ANNUNCIATE) AND P4001-1 (VLOC ANNUNCIATE) DO NOT APPLY TO GPS 400 NOR GNC 420.
 3. LOWER CASE PIN DESIGNATORS ARE SHOWN AS UNDERLINED UPPER CASE LETTERS.
 4. REFER TO MANUFACTURERS' DOCUMENTATION FOR COMPLETE PINOUT AND INTERCONNECT INFORMATION. PINOUTS OF OTHER UNITS SHOWN FOR REFERENCE ONLY.

Figure 4-7. Main Indicator Interconnect

4.11.6 KI 209A Main Indicator Interconnect


- NOTES:
1. ALL WIRES 24 AWG OR LARGER UNLESS OTHERWISE NOTED
 2. PROPER CONNECTION OF THE RELAY ENGAGE INPUT OF THE KI 209A IS DEPENDENT ON ITS POWER SUPPLY VOLTAGE. REFER TO KI 209A DOCUMENTATION FOR PROPER CONNECTION.
 3. TO CONNECT THE GNS 430 TO A KI 209A INDICATOR, ADD TWO 10 KOHM, 1/4 WATT RESISTORS. ONE BETWEEN P4001 PINS 33 AND 34, AND ONE BETWEEN P4001 PINS 35 AND 36.

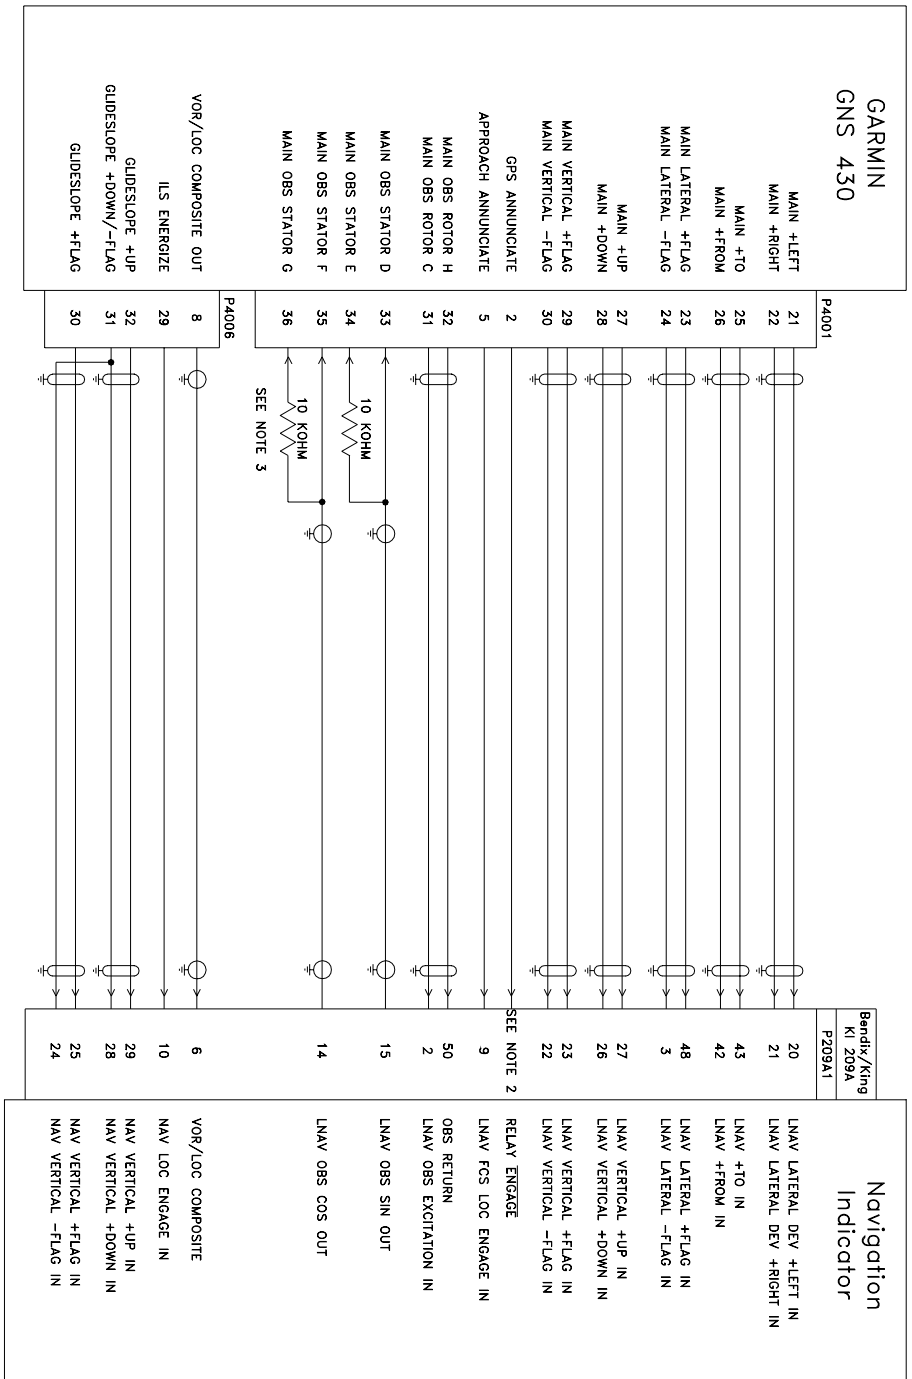

4. REFER TO MANUFACTURERS' DOCUMENTATION FOR COMPLETE PINOUT AND INTERCONNECT INFORMATION. PINOUTS OF OTHER UNITS SHOWN FOR REFERENCE ONLY.

Figure 4.8. KI 209A Main Indicator Interconnect

4.11.7 KI 208A Main Indicator Interconnect

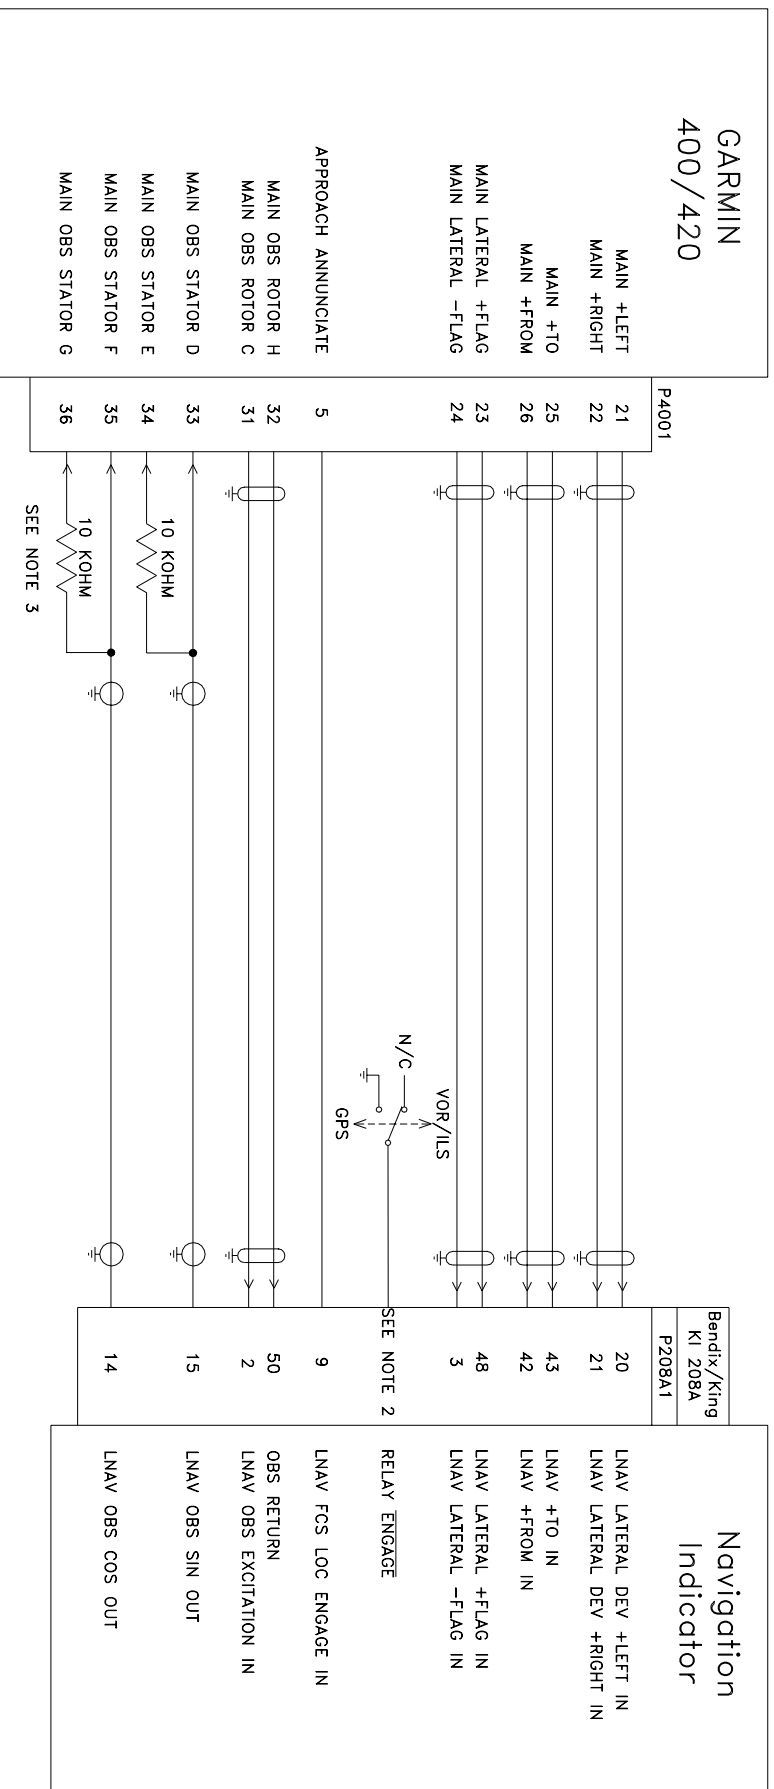


- NOTES:
1. ALL WIRES 24 AWG OR LARGER UNLESS OTHERWISE NOTED
 2. PROPER CONNECTION OF THE RELAY ENGAGE INPUT OF THE KI 208A IS DEPENDENT ON ITS POWER SUPPLY VOLTAGE. REFER TO KI 208A DOCUMENTATION FOR PROPER CONNECTION.
 3. TO CONNECT THE 400 SERIES UNIT TO A KI 208A INDICATOR, ADD TWO 10 KOHM, 1/4 WATT RESISTORS, ONE BETWEEN P4001 PINS 33 AND 34, AND ONE BETWEEN P4001 PINS 35 AND 36.

4. REFER TO MANUFACTURERS' DOCUMENTATION FOR COMPLETE PINOUT AND INTERCONNECT INFORMATION. PINOUTS OF OTHER UNITS SHOWN FOR REFERENCE ONLY.

Figure 4.9. KI 208A Main Indicator Interconnect

4.11.8 Annunciators/Switches Interconnect

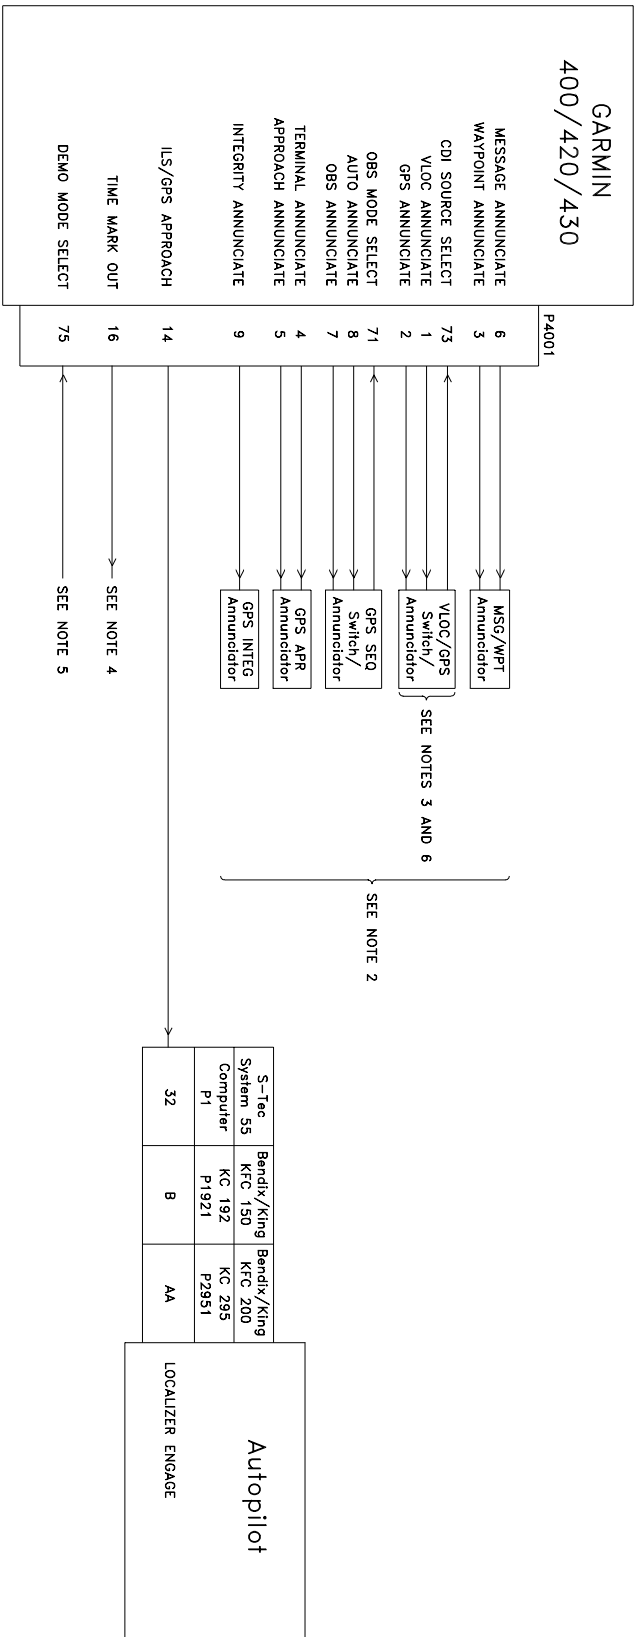


- NOTES:
1. ALL WIRES 24 AWG OR LARGER UNLESS OTHERWISE NOTED
 2. INITIAL CERTIFICATION OF THE 400 SERIES WAS ACCOMPLISHED WITHOUT USE OF ANY REMOTE SWITCHES OR ANNUNCIATORS, SINCE THE SAME SWITCHING AND ANNUNCIATION IS AVAILABLE ON THE FRONT PANEL OF THE GPS. HOWEVER, IF THE UNIT IS NOT INSTALLED IN THE PILOT'S NORMAL FIELD OF VIEW, SOME OR ALL OF THE REMOTE SWITCHES AND ANNUNCIATORS MAY BE REQUIRED BY YOUR CERTIFICATION AGENCY.
 3. AN EXTERNAL MOMENTARY VLOC/GPS SWITCH/ANNUNCIATOR OR ANNUNCIATOR (WITH NO SWITCH) MAY BE USED IN A GNS 430 INSTALLATION. A SWITCH SERVES THE SAME PURPOSE AS THE "CDI" BUTTON ON THE FRONT OF THE GNS 430.
 4. TIME MARK OUT (P4001-16) OUTPUTS A 1 MILLISECOND WIDE PULSE ONCE PER SECOND.
 5. DEMO MODE SELECT (P4001-75) MAY BE GROUNDED TO START THE UNIT IN DEMO MODE. DO NOT USE IN AN AIRCRAFT INSTALLATION.

6. P4001 PINS 73, 1, AND 2 HAVE NO FUNCTION ON GPS 400 AND GNC 420.
7. REFER TO MANUFACTURERS' DOCUMENTATION FOR COMPLETE PINOUT AND INTERCONNECT INFORMATION. PINOUTS OF OTHER UNITS SHOWN FOR REFERENCE ONLY.

Figure 4-10. Annunciators/Switches Interconnect

4.11.9 RS-232 Serial Data Interconnect

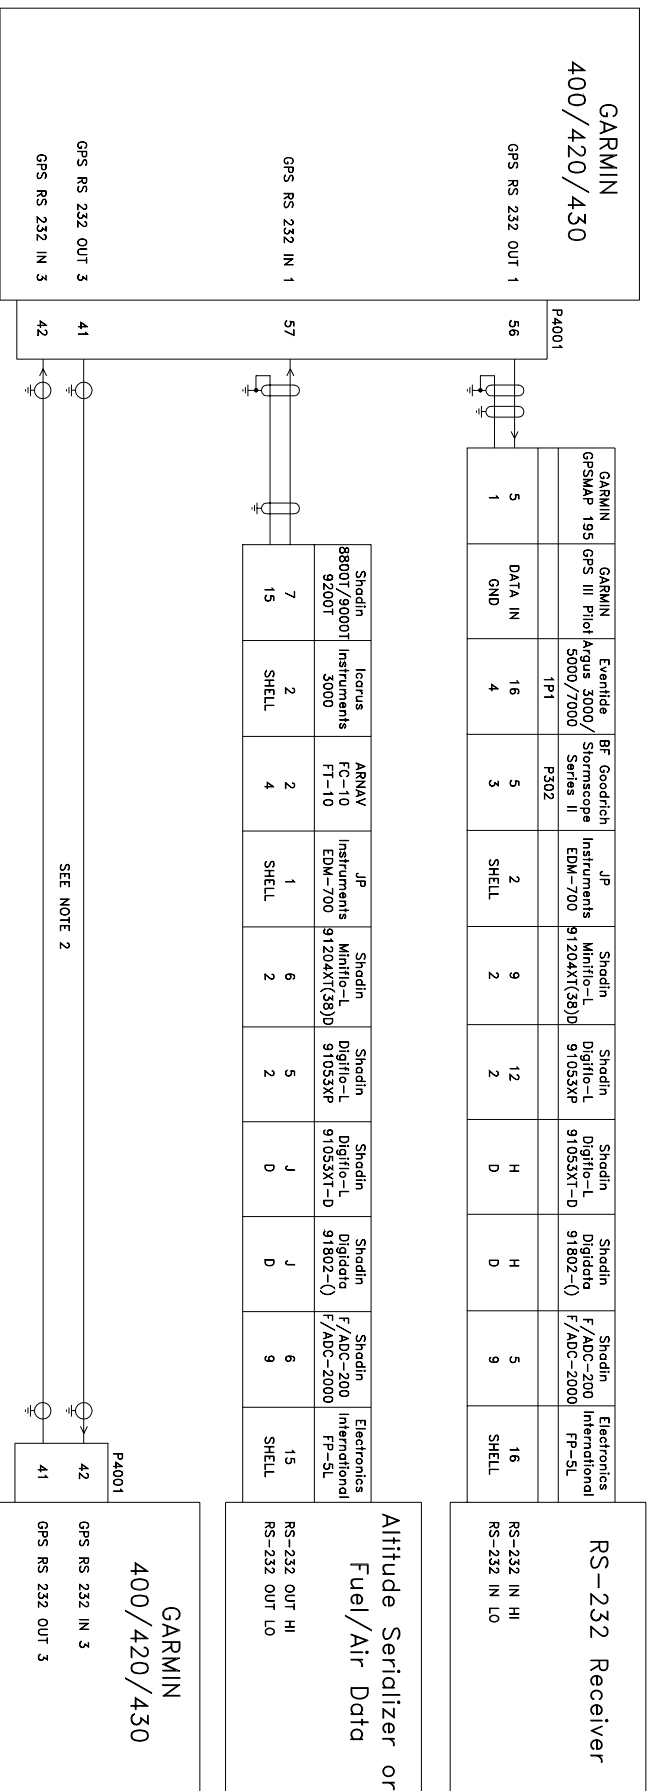

- NOTES:
1. ALL WIRES 24 AWG OR LARGER UNLESS OTHERWISE NOTED
 2. IF TWO OR MORE 400 SERIES UNITS ARE INSTALLED, THE RS-232 LINES ON P4001-41 AND P4001-42 MAY BE CROSS-CONNECTED TO CROSSFILL FLIGHT PLANS AND USER WAYPOINTS. TO CROSSFILL FLIGHT PLANS, IT IS REQUIRED THAT BOTH 400 SERIES UNITS HAVE IDENTICAL DATABASE CYCLE DATES AND MAIN SOFTWARE.
 3. REFER TO MANUFACTURERS' DOCUMENTATION FOR COMPLETE PINOUT AND INTERCONNECT INFORMATION. PINOUTS OF OTHER UNITS SHOWN FOR REFERENCE ONLY.

Figure 4-11. RS-232 Serial Data Interconnect



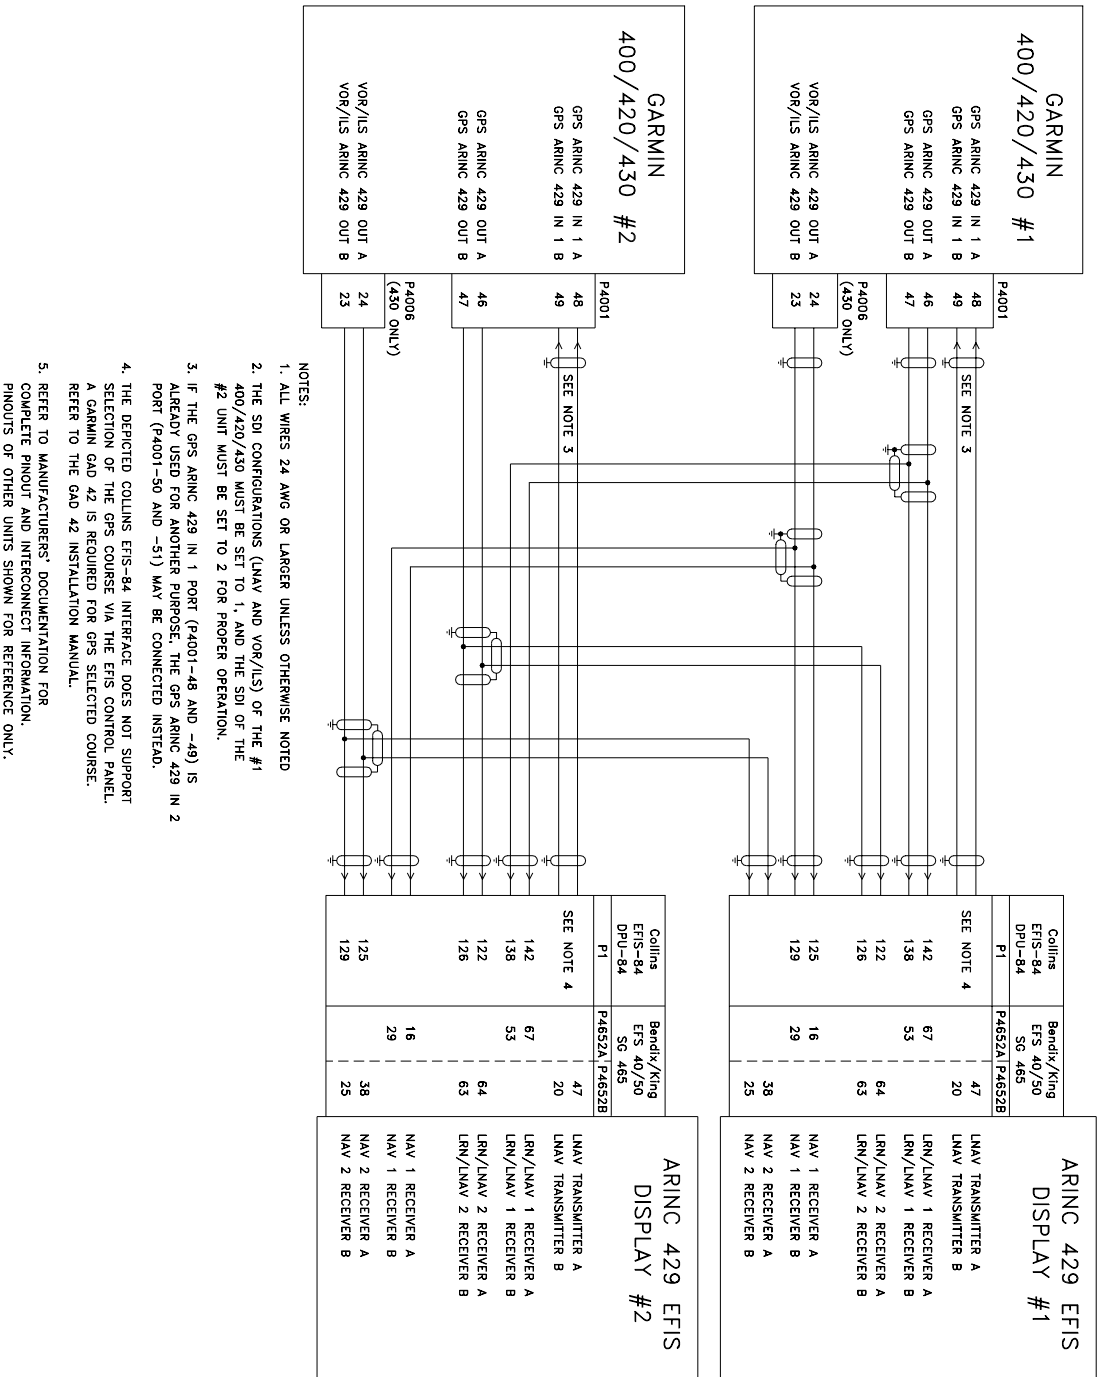


Figure 4-12. ARINC 429 EFIS Interconnect

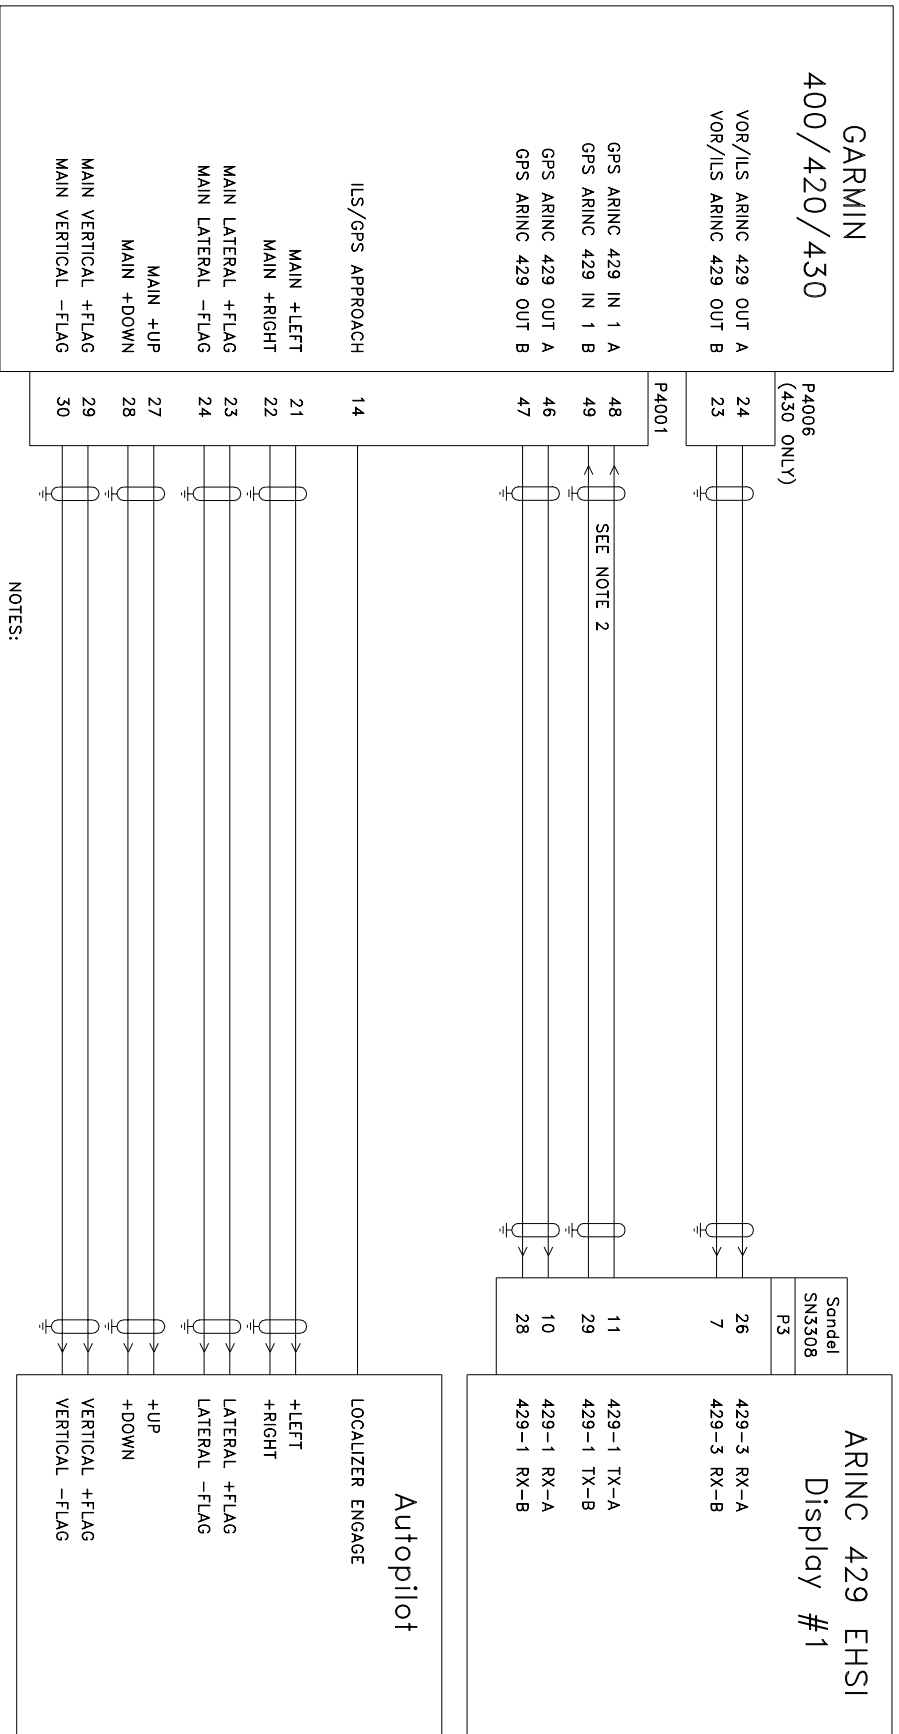


- NOTES:
1. ALL WIRES 24 AWG OR LARGER UNLESS OTHERWISE NOTED
 2. IF THE GPS ARINC 429 IN 1 PORT (P4001-48 AND -49) IS ALREADY USED FOR ANOTHER PURPOSE, THE GPS ARINC 429 IN 2 PORT (P4001-50 AND -51) MAY BE CONNECTED INSTEAD.
 3. REFER TO MANUFACTURERS' DOCUMENTATION FOR COMPLETE PINOUT AND INTERCONNECT INFORMATION. PINOUTS OF OTHER UNITS SHOWN FOR REFERENCE ONLY.

Figure 4-13. ARINC 429 Sandel EHSI Interconnect (1 400 Series Unit, 1 Sandel SN3308)

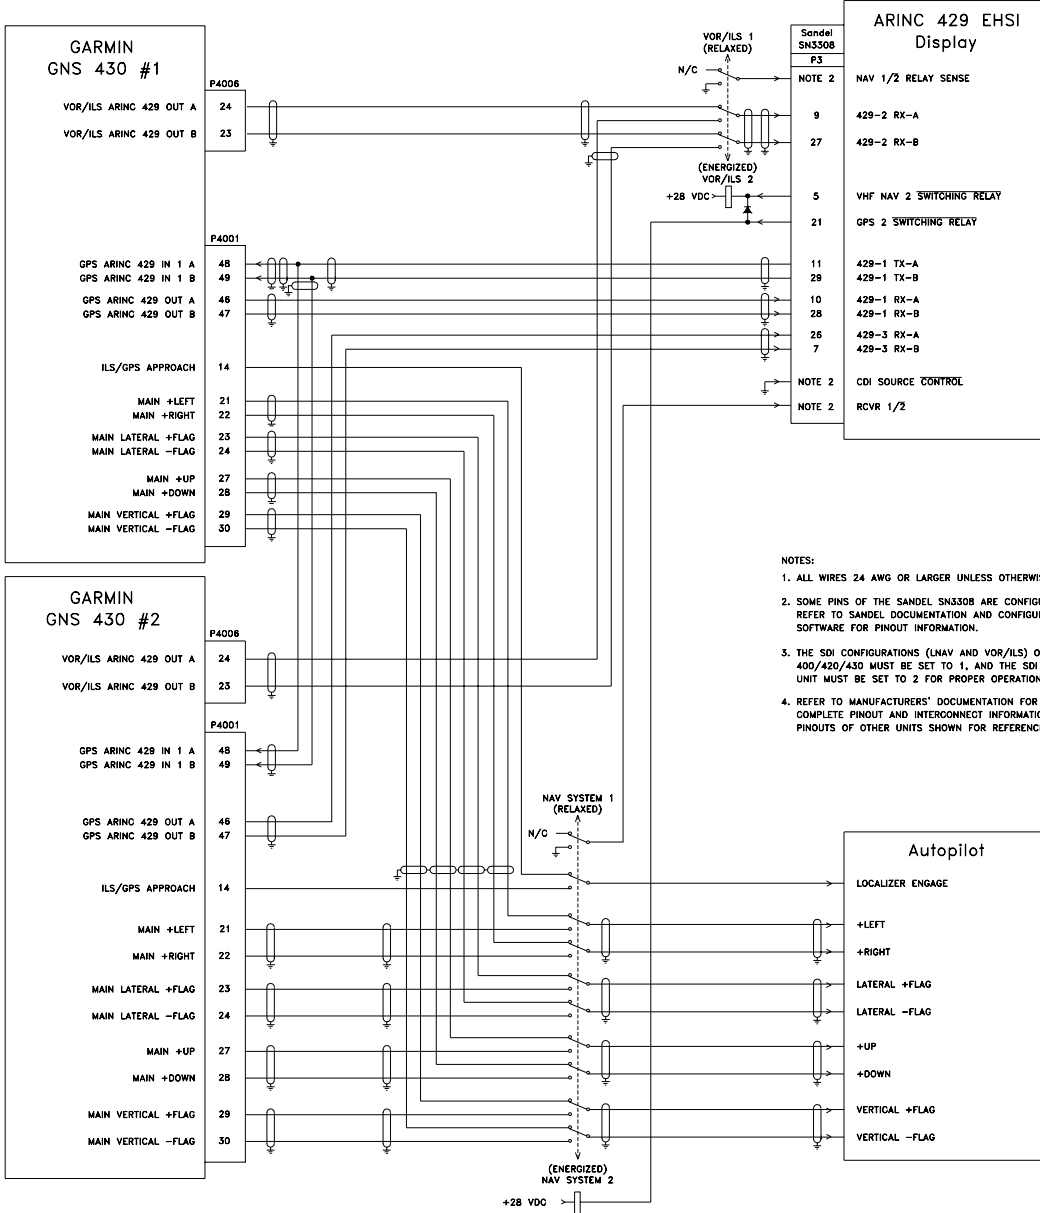

- NOTES:
1. ALL WIRES 24 AWG OR LARGER UNLESS OTHERWISE NOTED
 2. SOME PINS OF THE SANDEL SN3308 ARE CONFIGURABLE. REFER TO SANDEL DOCUMENTATION AND CONFIGURATION SOFTWARE FOR PINOUT INFORMATION.
 3. THE SDI CONFIGURATIONS (LNAV AND VOR/ILS) OF THE #1 400/420/430 MUST BE SET TO 1, AND THE SDI OF THE #2 UNIT MUST BE SET TO 2 FOR PROPER OPERATION.
 4. REFER TO MANUFACTURERS' DOCUMENTATION FOR COMPLETE PINOUT AND INTERCONNECT INFORMATION. PINOUTS OF OTHER UNITS SHOWN FOR REFERENCE ONLY.



Figure 4-14. ARINC 429 Sandel EHSI Interconnect (2 GNS 430, 1 Sandel SN3308)

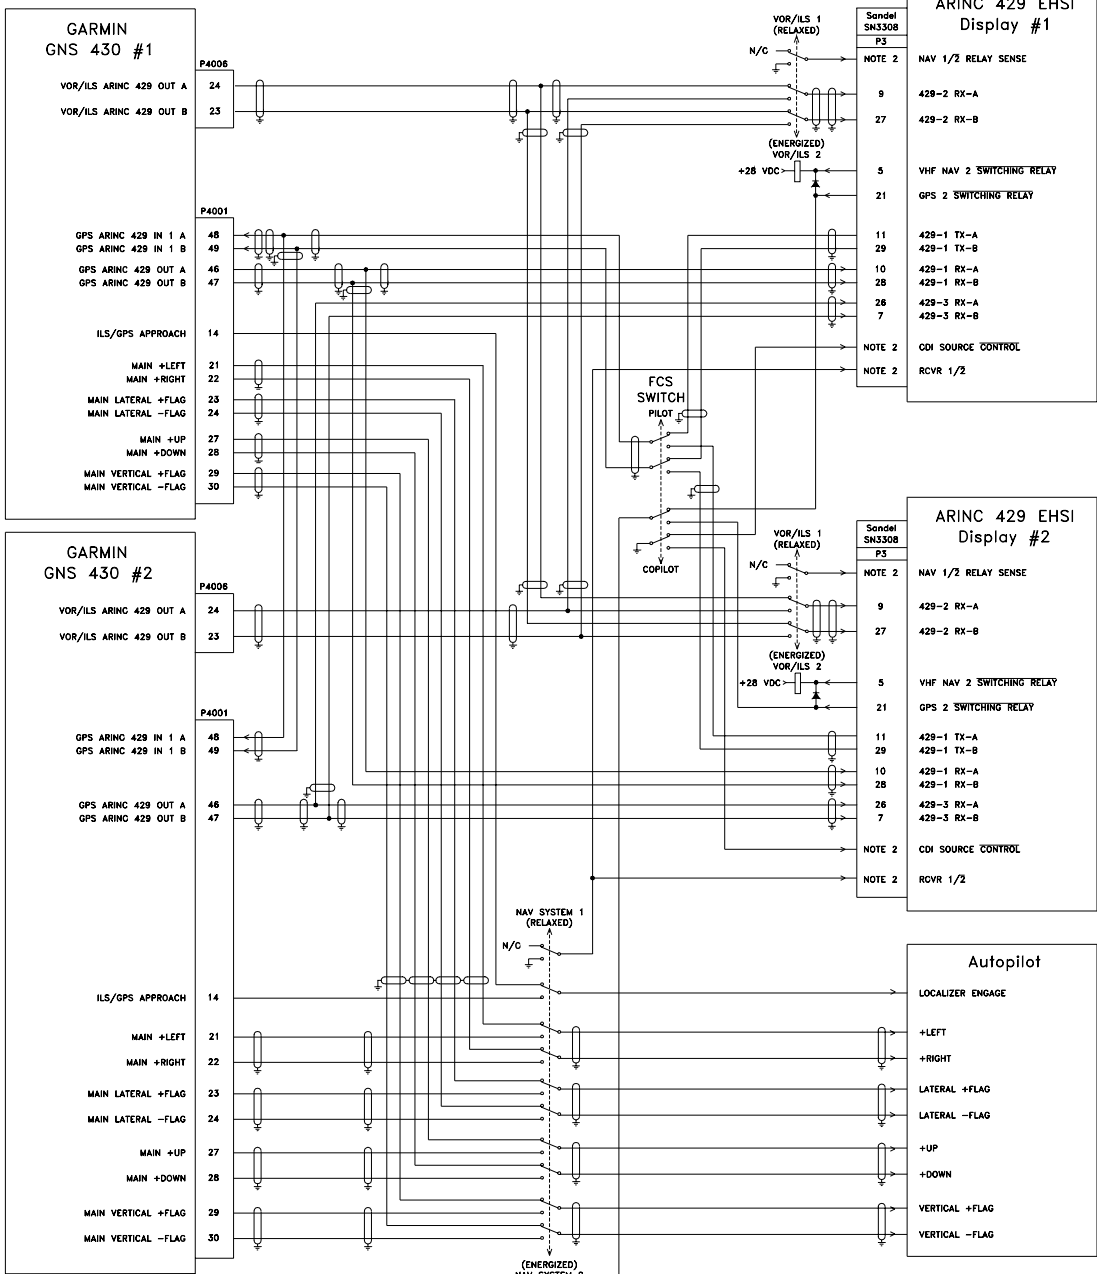

- NOTES:
1. ALL WIRES 24 AWG OR LARGER UNLESS OTHERWISE NOTED
 2. SOME PINS OF THE SANDEL SN3308 ARE CONFIGURABLE. REFER TO SANDEL DOCUMENTATION AND CONFIGURATION SOFTWARE FOR PINOUT INFORMATION.
 3. THE SDI CONFIGURATIONS (LNAV AND VOR/LS) OF THE #1 400/420/430 MUST BE SET TO 1, AND THE SDI OF THE #2 UNIT MUST BE SET TO 2 FOR PROPER OPERATION.
 4. REFER TO MANUFACTURERS' DOCUMENTATION FOR COMPLETE PINOUT AND INTERCONNECT INFORMATION. PINOUTS OF OTHER UNITS SHOWN FOR REFERENCE ONLY.

Figure 4-15. ARINC 429 Sandel EHSI Interconnect (2 GNS 430, 2 Sandel SN3308)

4.11.14 ARINC 429 Air Data/RU/AHRS Interconnect

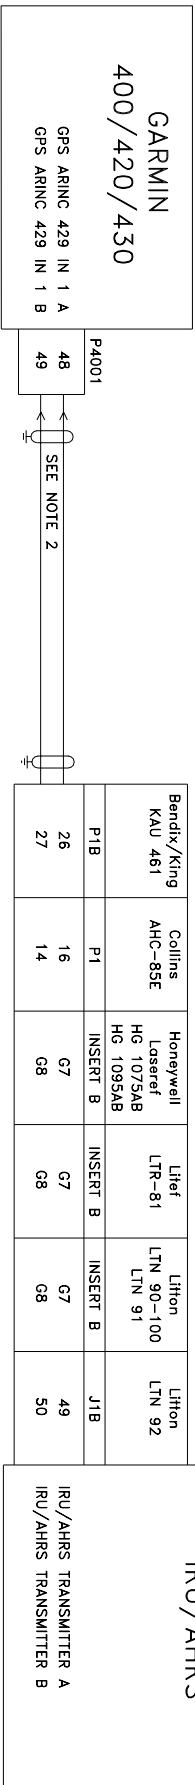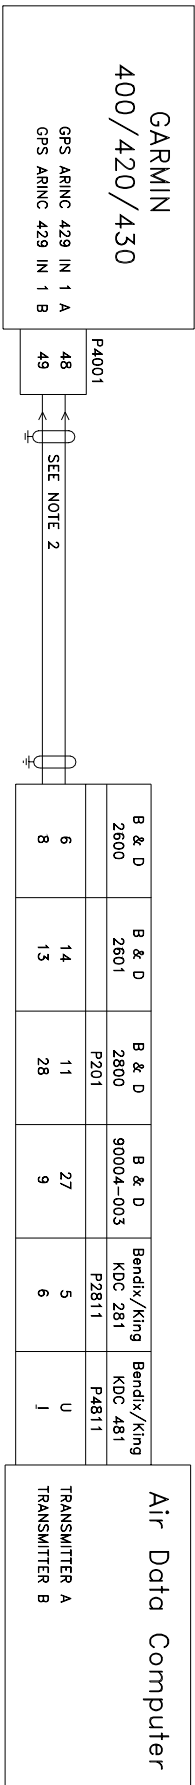

NOTES:

1. ALL WIRES 24 AWG OR LARGER UNLESS OTHERWISE NOTED
2. IF THE GPS ARINC 429 IN 1 PORT (P4001-48 AND -49) IS ALREADY USED FOR ANOTHER PURPOSE, THE GPS ARINC 429 IN 2 PORT (P4001-50 AND -51) MAY BE CONNECTED INSTEAD.
3. LOWER CASE PIN DESIGNATORS ARE SHOWN AS UNDERLINED UPPER CASE LETTERS.
4. REFER TO MANUFACTURERS' DOCUMENTATION FOR COMPLETE PINOUT AND INTERCONNECT INFORMATION. PINOUTS OF OTHER UNITS SHOWN FOR REFERENCE ONLY.

Figure 4-16. ARINC 429 Air Data/RU/AHRS Interconnect

4.11.15 ARINC 429 Flight Control Interconnect

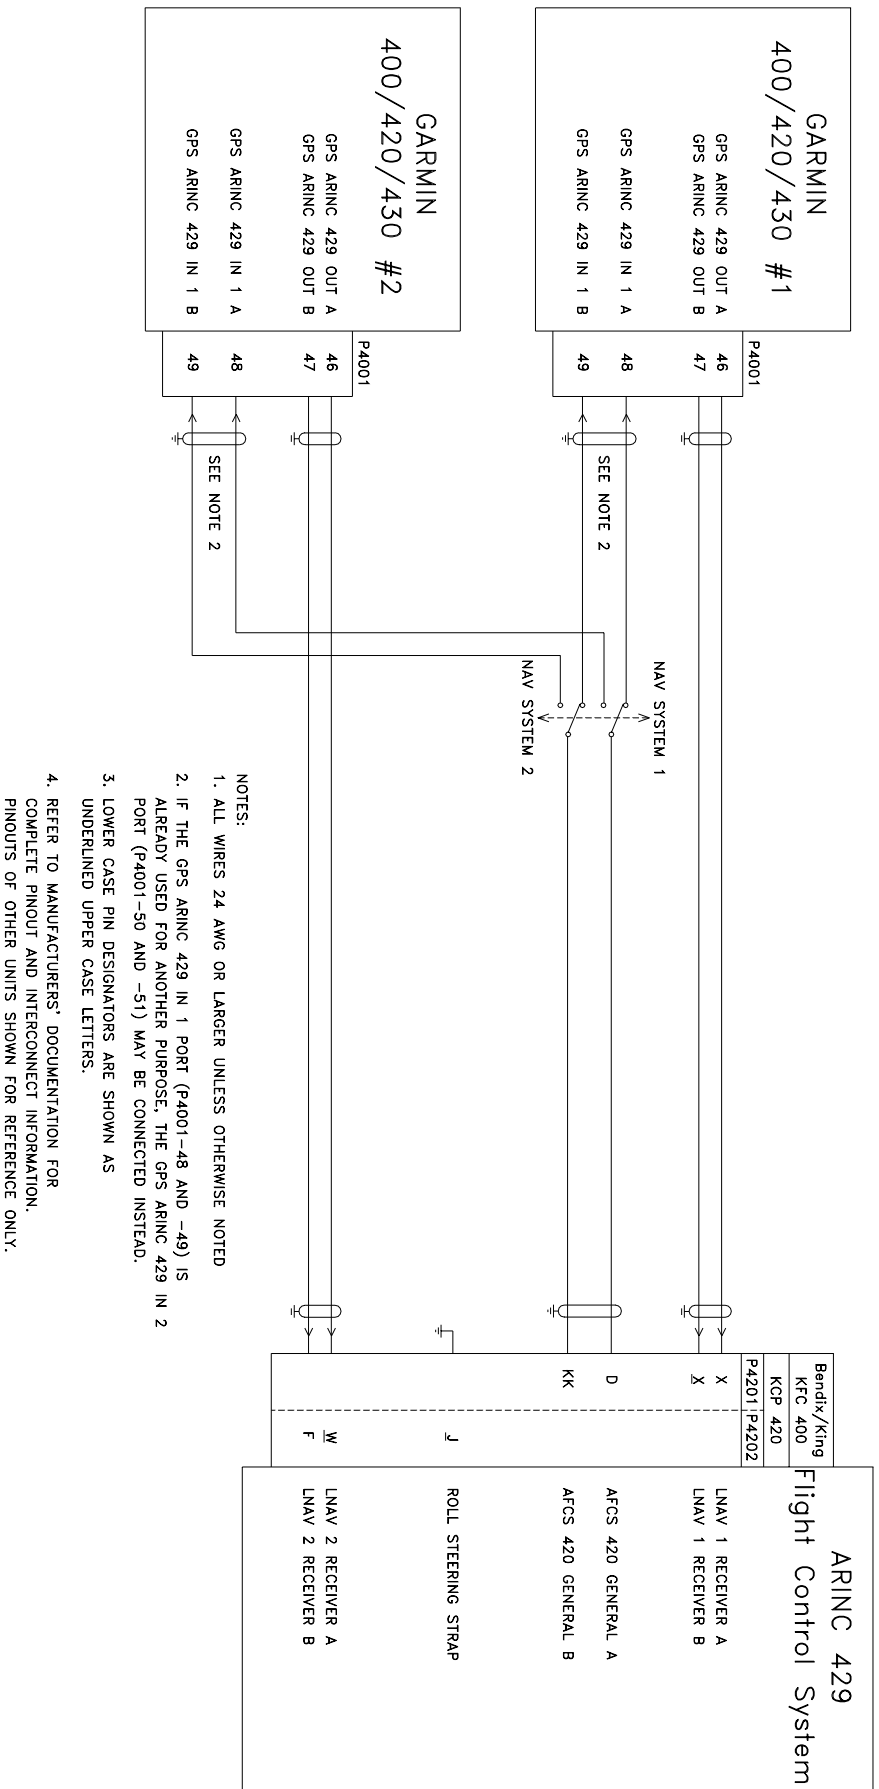


Figure 4-17. ARINC 429 Flight Control Interconnect

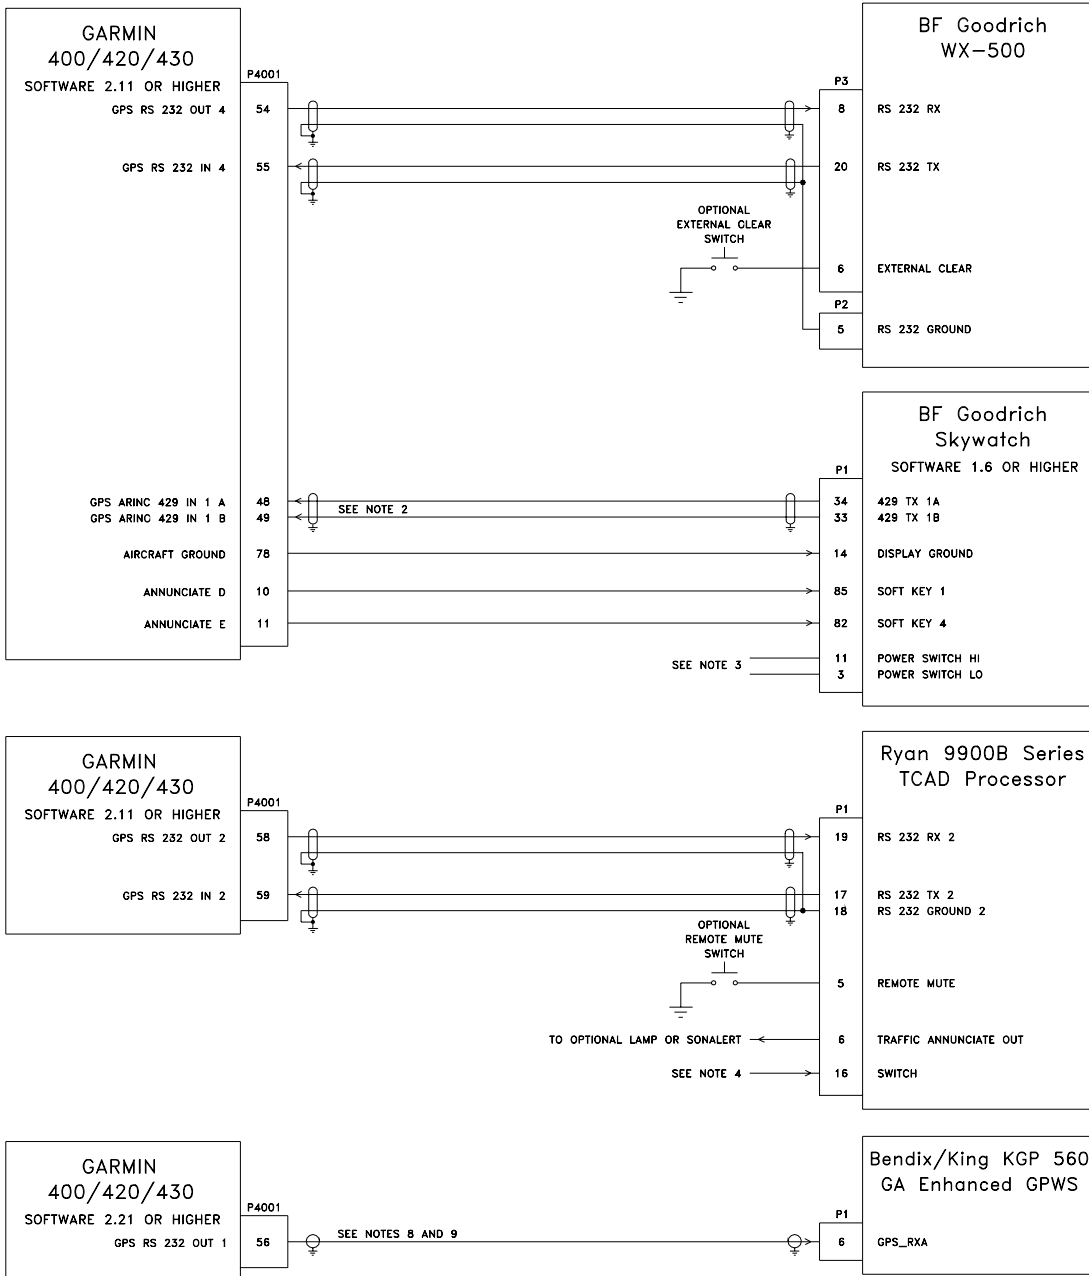


Figure 4-18. Weather, Traffic, and Terrain Interconnect

NOTES:

1. ALL WIRES 24 AWG OR LARGER UNLESS OTHERWISE NOTED
2. IF THE GPS ARINC 429 IN 1 PORT (P4001-48 AND -49) IS ALREADY USED FOR ANOTHER PURPOSE, THE GPS ARINC 429 IN 2 PORT (P4001-50 AND -51) MAY BE CONNECTED INSTEAD.
3. THE SKYWATCH POWER SWITCH PINS (P1-11 AND P1-3) SHOULD BE CONNECTED TOGETHER TO TURN THE PROCESSOR UNIT ON, AND OPEN TO TURN THIS UNIT OFF. IF A SKYWATCH CONTROL/DISPLAY UNIT IS NOT IN THE INSTALLATION, A DEDICATED SWITCH MAY BE REQUIRED TO TURN THE SKYWATCH PROCESSOR UNIT ON AND OFF.
4. THE RYAN TCAD PROCESSOR SWITCH PIN (P1-16) SHOULD BE GROUNDED TO TURN THE PROCESSOR UNIT ON, AND OPEN TO TURN THIS UNIT OFF. IF A RYAN TCAD DISPLAY UNIT IS NOT IN THE INSTALLATION, A DEDICATED SWITCH MAY BE REQUIRED TO TURN THE TCAD PROCESSOR UNIT ON AND OFF.
5. IF EITHER OF THESE TRAFFIC SYSTEMS IS INSTALLED WITHOUT A CONTROL/DISPLAY UNIT, A PLACARD IS REQUIRED NEAR THE 400 SERIES UNIT, INDICATING THAT A SKYWATCH/TCAD SYSTEM IS INSTALLED, AND ITS DATA MAY BE DISPLAYED ON THE 400 SERIES UNIT.
6. IN ORDER FOR RYAN TCAD TRAFFIC TO BE DISPLAYED ON THE 400 SERIES UNIT'S MAP PAGE, THE 400 SERIES UNIT MUST HAVE A DIGITAL HEADING SOURCE.
7. IN ORDER FOR WX-500 OR SKYWATCH DATA TO BE DISPLAYED ON THE 400 SERIES UNIT'S MAP PAGE, THE 400 SERIES UNIT MUST HAVE A DIGITAL HEADING SOURCE, OR THE WX-500/SKYWATCH MUST HAVE A SYNCHRO OR SERIAL HEADING SOURCE. A STEPPER HEADING SOURCE WILL NOT ALLOW WX-500/SKYWATCH DATA TO BE DISPLAYED ON THE MAP PAGE.
8. THIS DRAWING IDENTIFIES SPECIFIC RS 232 PORTS. CONFIGURATION OF 400 SERIES UNITS WITH MAIN SOFTWARE VERSION 2.19 OR EARLIER REQUIRES THESE SPECIFIC PORTS. MAIN SOFTWARE VERSION 2.20 OR LATER DOES NOT HAVE THIS LIMITATION, SUCH THAT ANY SERIAL FORMAT CAN BE SELECTED ON ANY OF THE FOUR RS 232 PORTS.
9. IF AN RS 232 OUTPUT PORT IS CONFIGURED FOR THE HONEYWELL EGPWS, THE CORRESPONDING RS 232 INPUT OF THE SAME PORT MAY NOT BE USED.
10. REFER TO MANUFACTURERS' DOCUMENTATION FOR COMPLETE PINOUT AND INTERCONNECT INFORMATION. PINOUTS OF OTHER UNITS SHOWN FOR REFERENCE ONLY.

4.11.17 Audio Panel Interconnect


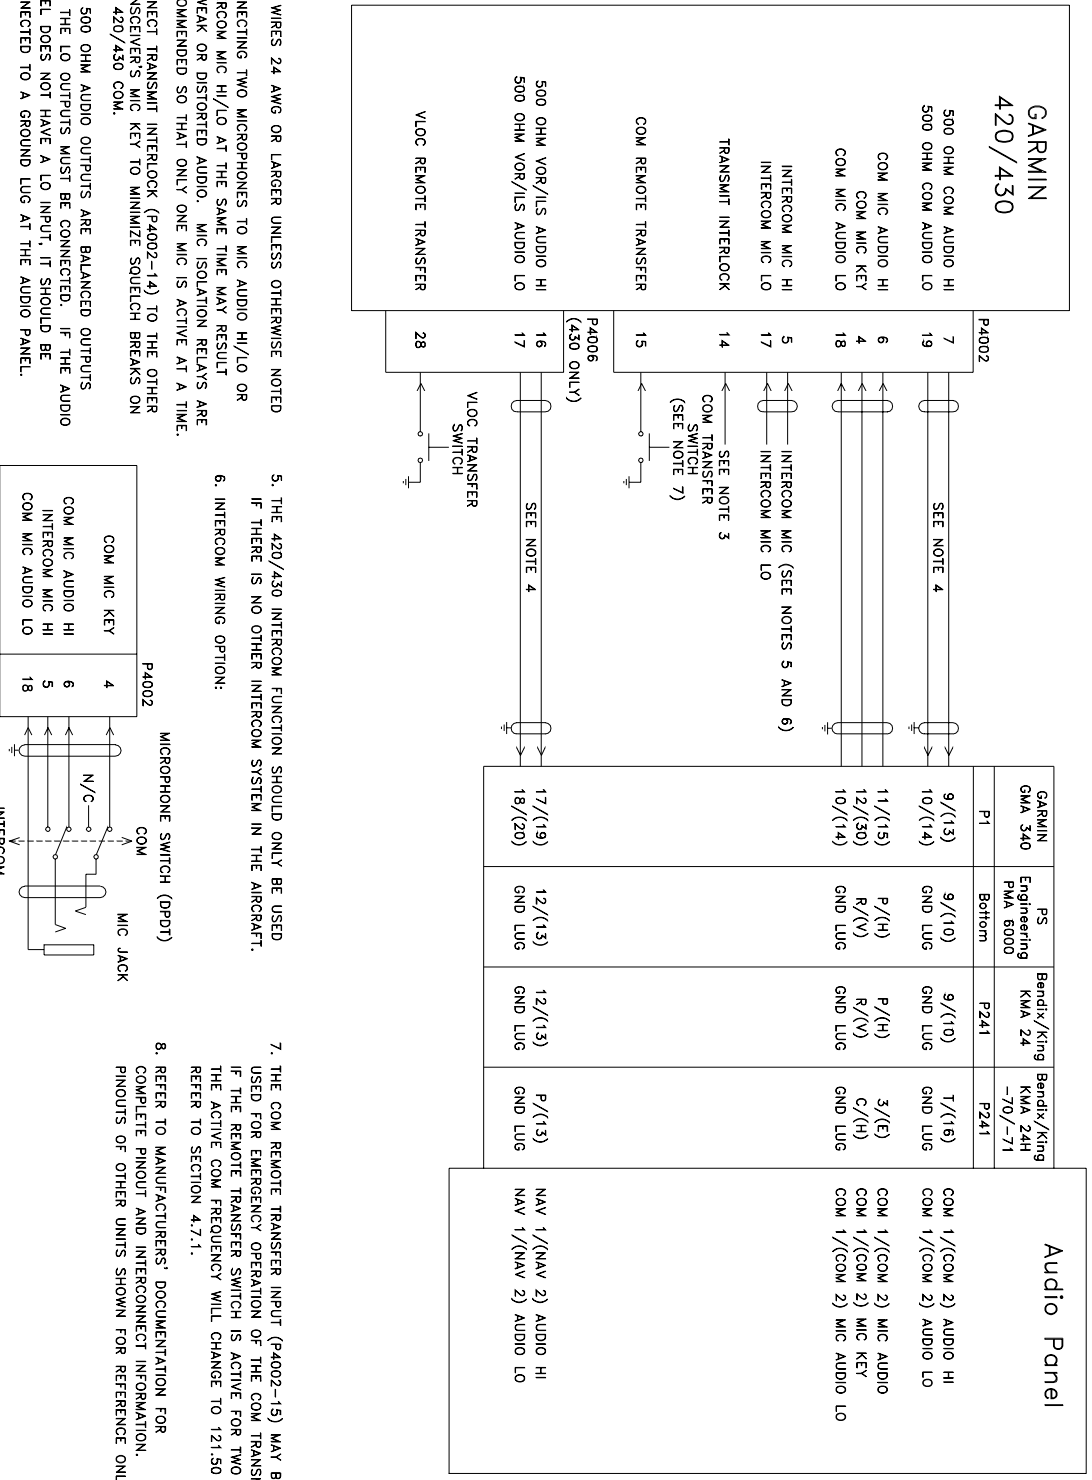



Figure 4-19. Audio Panel Interconnect

- NOTES:
1. ALL WIRES 24 AWG OR LARGER UNLESS OTHERWISE NOTED
 2. CONNECTING TWO MICROPHONES TO MIC AUDIO HI/LO OR INTERCOM MIC HI/LO AT THE SAME TIME MAY RESULT IN WEAK OR DISTORTED AUDIO. MIC ISOLATION RELAYS ARE RECOMMENDED SO THAT ONLY ONE MIC IS ACTIVE AT A TIME.
 3. CONNECT TRANSMIT INTERLOCK (P4002-14) TO THE OTHER TRANSMITTER'S MIC KEY TO MINIMIZE SQUELCH BREAKS ON THE 420/430 COM.
 4. THE 500 OHM AUDIO OUTPUTS ARE BALANCED OUTPUTS AND THE LO OUTPUTS MUST BE CONNECTED. IF THE AUDIO PANEL DOES NOT HAVE A LO INPUT, IT SHOULD BE CONNECTED TO A GROUND LUG AT THE AUDIO PANEL.

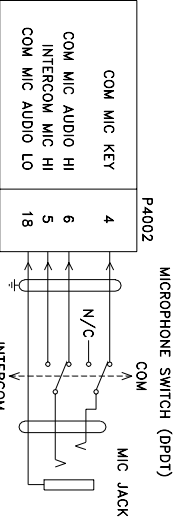

5. THE 420/430 INTERCOM FUNCTION SHOULD ONLY BE USED IF THERE IS NO OTHER INTERCOM SYSTEM IN THE AIRCRAFT.
6. INTERCOM WIRING OPTION:
7. THE COM REMOTE TRANSFER INPUT (P4002-15) MAY BE USED FOR EMERGENCY OPERATION OF THE COM TRANSMITTER. IF THE REMOTE TRANSFER SWITCH IS ACTIVE FOR TWO SECONDS, THE ACTIVE COM FREQUENCY WILL CHANGE TO 121.50 MHZ. REFER TO SECTION 4.7.1.
8. REFER TO MANUFACTURERS' DOCUMENTATION FOR COMPLETE PINOUT AND INTERCONNECT INFORMATION. PINOUTS OF OTHER UNITS SHOWN FOR REFERENCE ONLY.

4.11.18 VOR/ILS Indicator Interconnect

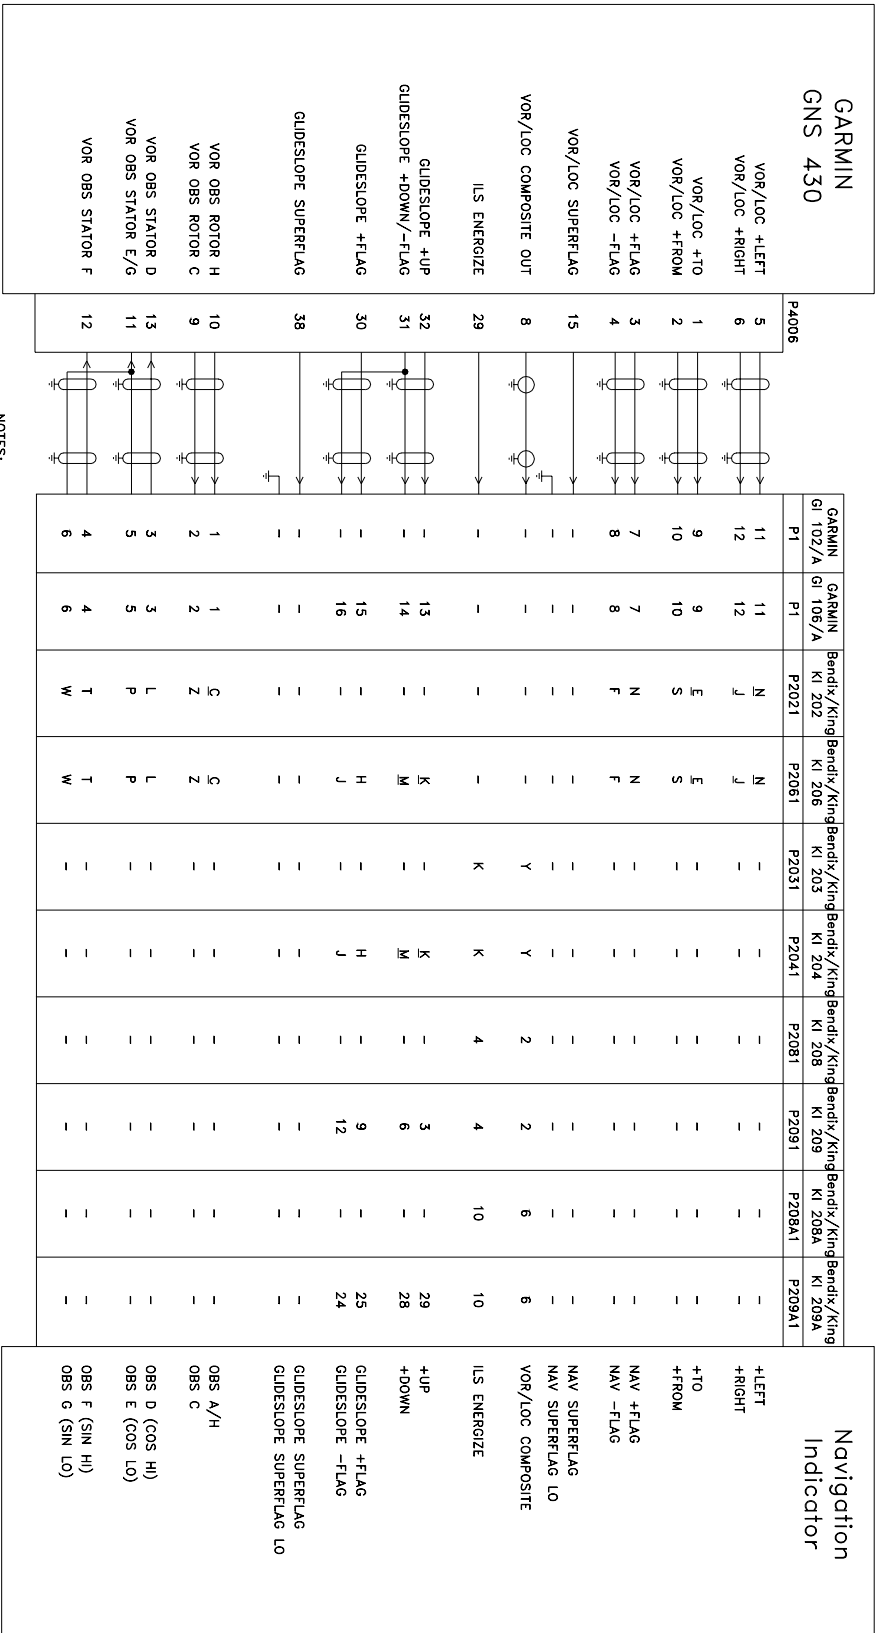

- NOTES:
1. ALL WIRES 24 AWG OR LARGER UNLESS OTHERWISE NOTED
 2. LOWER CASE PIN DESIGNATORS ARE SHOWN AS UNDERLINED UPPER CASE LETTERS.
 3. THIS INTERCONNECT APPLIES ONLY WHEN IT IS DESIRED FOR A SEPARATE INDICATOR TO DISPLAY GNS 430 VOR/ILS INFORMATION (REGARDLESS OF THE "CDI" BUTTON STATUS).
 4. REFER TO MANUFACTURERS' DOCUMENTATION FOR COMPLETE PINOUT AND INTERCONNECT INFORMATION. PINOUTS OF OTHER UNITS SHOWN FOR REFERENCE ONLY.

Figure 4-20. VOR/ILS Indicator Interconnect

4.11.19 RMI/OBI Interconnect


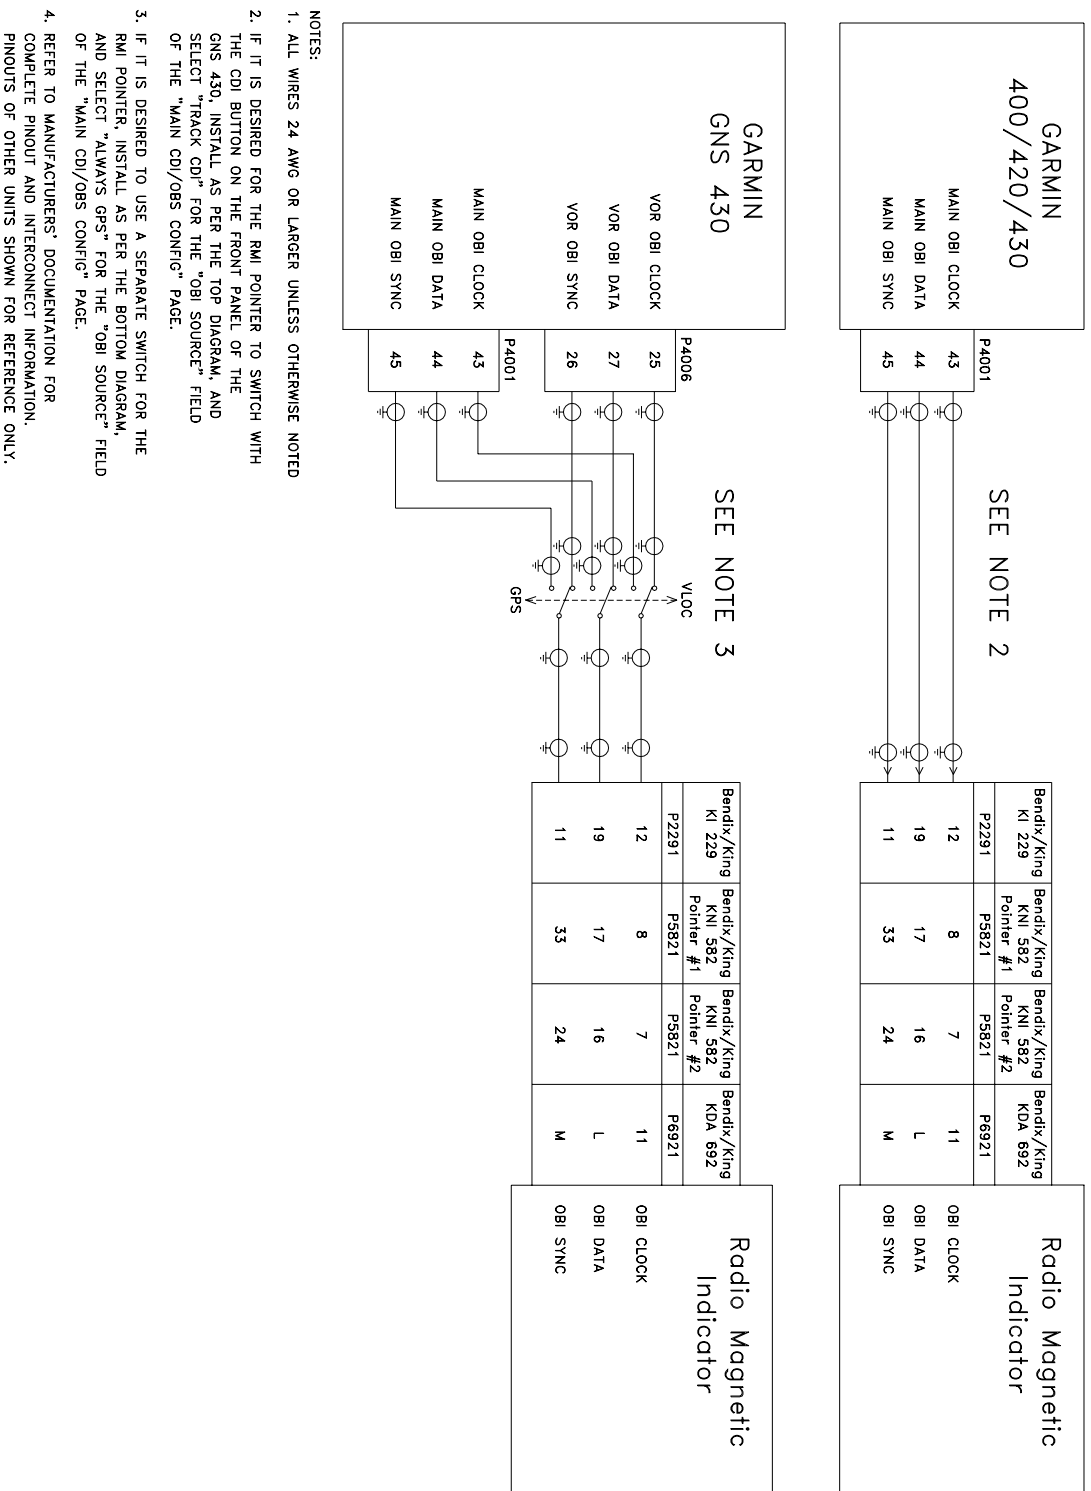


Figure 4-21. RMI/OBI Interconnect


4.11.20 King Serial Panel DME Tuning Interconnect

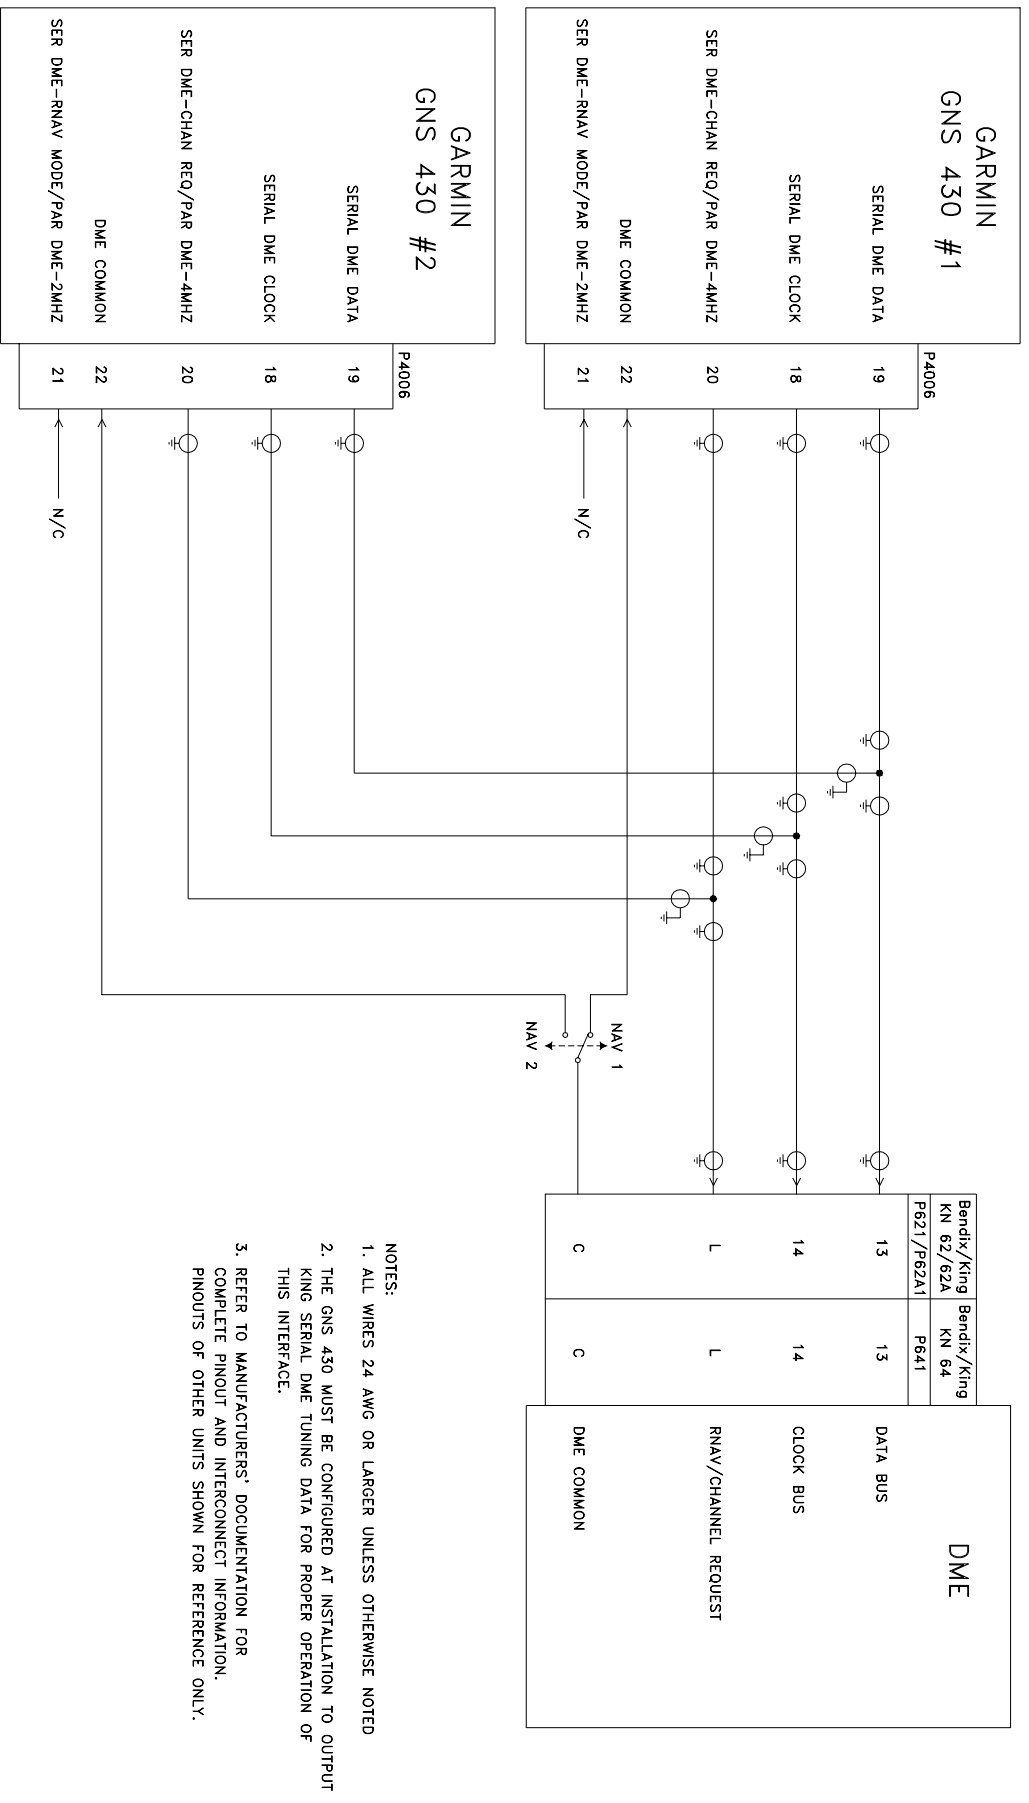

- NOTES:
1. ALL WIRES 24 AWG OR LARGER UNLESS OTHERWISE NOTED
 2. THE GNS 430 MUST BE CONFIGURED AT INSTALLATION TO OUTPUT KING SERIAL DME TUNING DATA FOR PROPER OPERATION OF THIS INTERFACE.
 3. REFER TO MANUFACTURERS' DOCUMENTATION FOR COMPLETE PINOUT AND INTERCONNECT INFORMATION. PINOUTS OF OTHER UNITS SHOWN FOR REFERENCE ONLY.

Figure 4-22. King Serial Panel DME Tuning Interconnect


4.11.21 King Serial Remote DME Tuning Interconnect

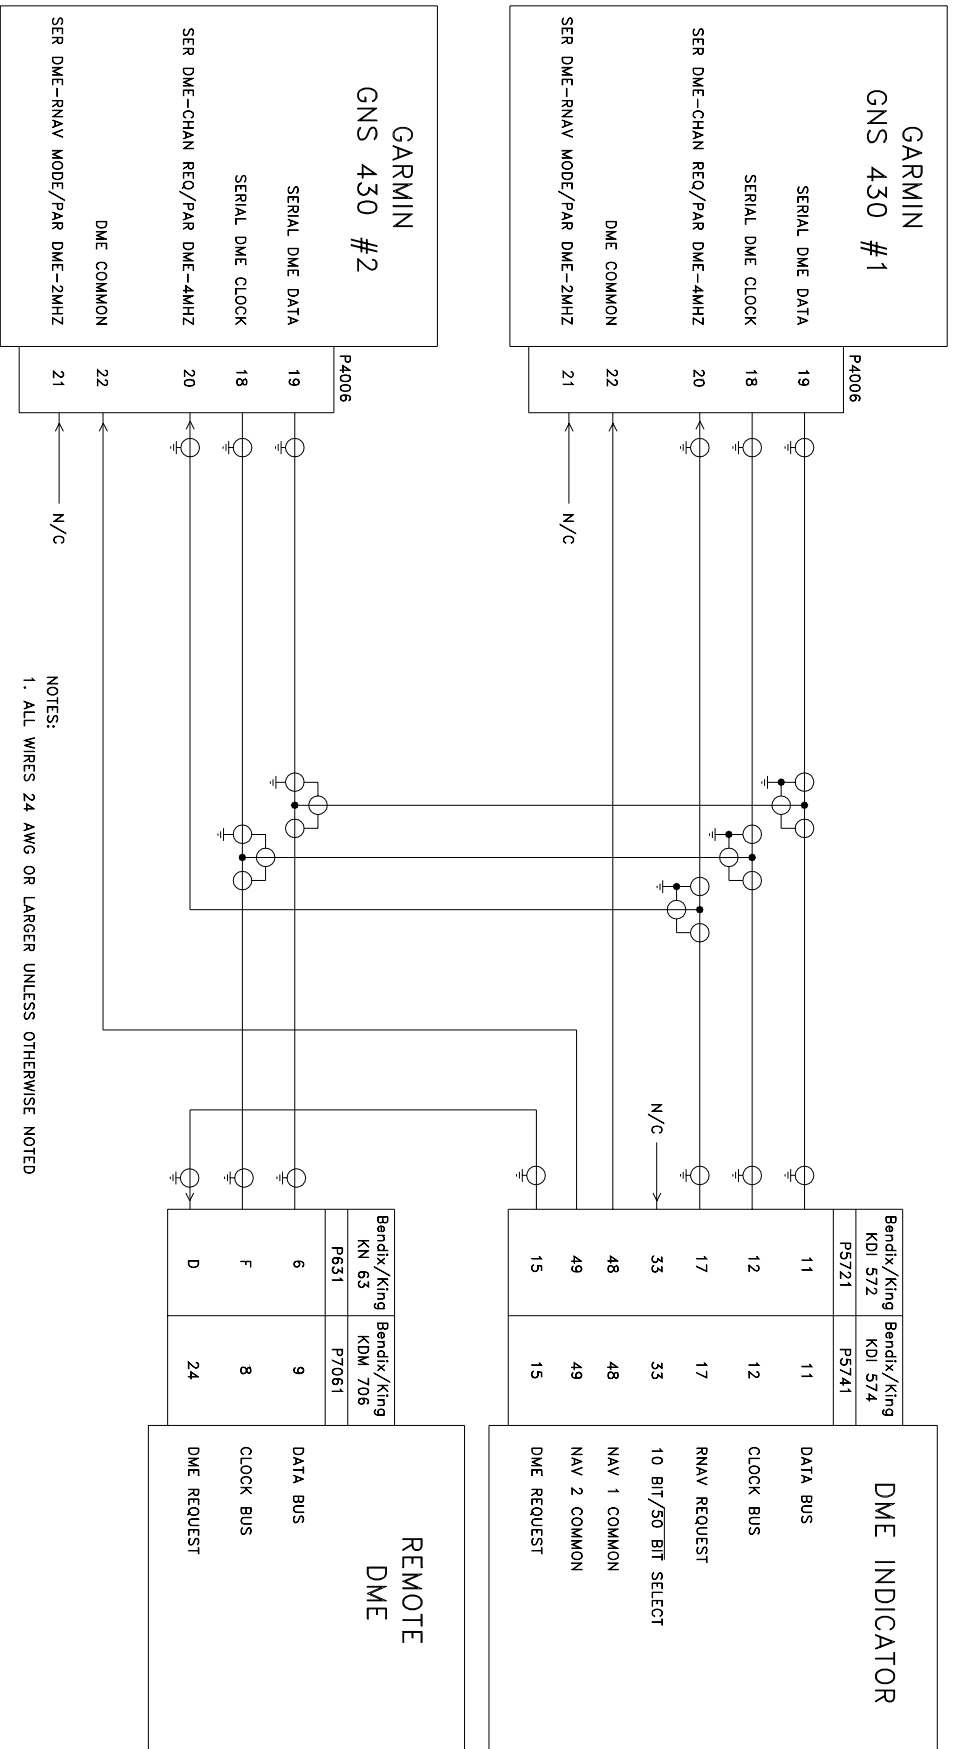

- NOTES:
1. ALL WIRES 24 AWG OR LARGER UNLESS OTHERWISE NOTED
 2. THE GNS 430 MUST BE CONFIGURED AT INSTALLATION TO OUTPUT KING SERIAL DME TUNING DATA FOR PROPER OPERATION OF THIS INTERFACE.
 3. REFER TO MANUFACTURERS' DOCUMENTATION FOR COMPLETE PINOUT AND INTERCONNECT INFORMATION. PINOUTS OF OTHER UNITS SHOWN FOR REFERENCE ONLY.

Figure 4-23. King Serial Remote DME Tuning Interconnect


4.11.22 Parallel 2 OF 5 DME Tuning Interconnect

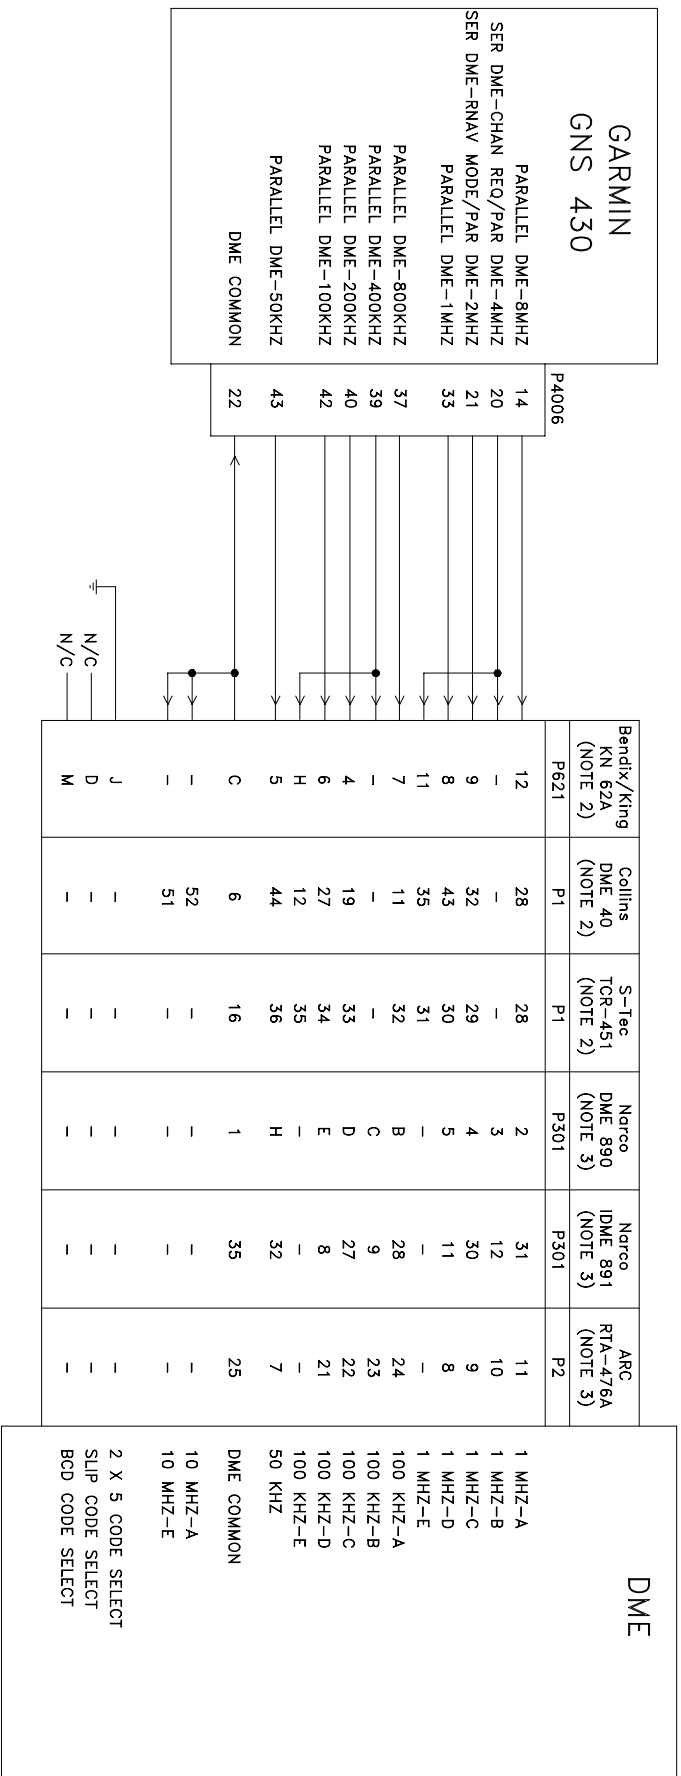

- NOTES:
1. ALL WIRES 24 AWG OR LARGER UNLESS OTHERWISE NOTED
 2. THE GNS 430 MUST BE CONFIGURED FOR 'PARALLEL 2x5' DME CHANNELLING MODE FOR PROPER OPERATION WITH THIS MODEL OF DME TRANSCIEVER.
 3. THE GNS 430 MUST BE CONFIGURED FOR 'NARCO 890/891' DME CHANNELLING MODE FOR PROPER OPERATION WITH THIS MODEL OF DME TRANSCIEVER.
 4. REFER TO MANUFACTURERS' DOCUMENTATION FOR COMPLETE PINOUT AND INTERCONNECT INFORMATION. PINOUTS OF OTHER UNITS SHOWN FOR REFERENCE ONLY.

Figure 4-24. Parallel 2 OF 5 DME Tuning Interconnect

4.11.23 Parallel BCD/Slip Code DME Tuning Interconnect

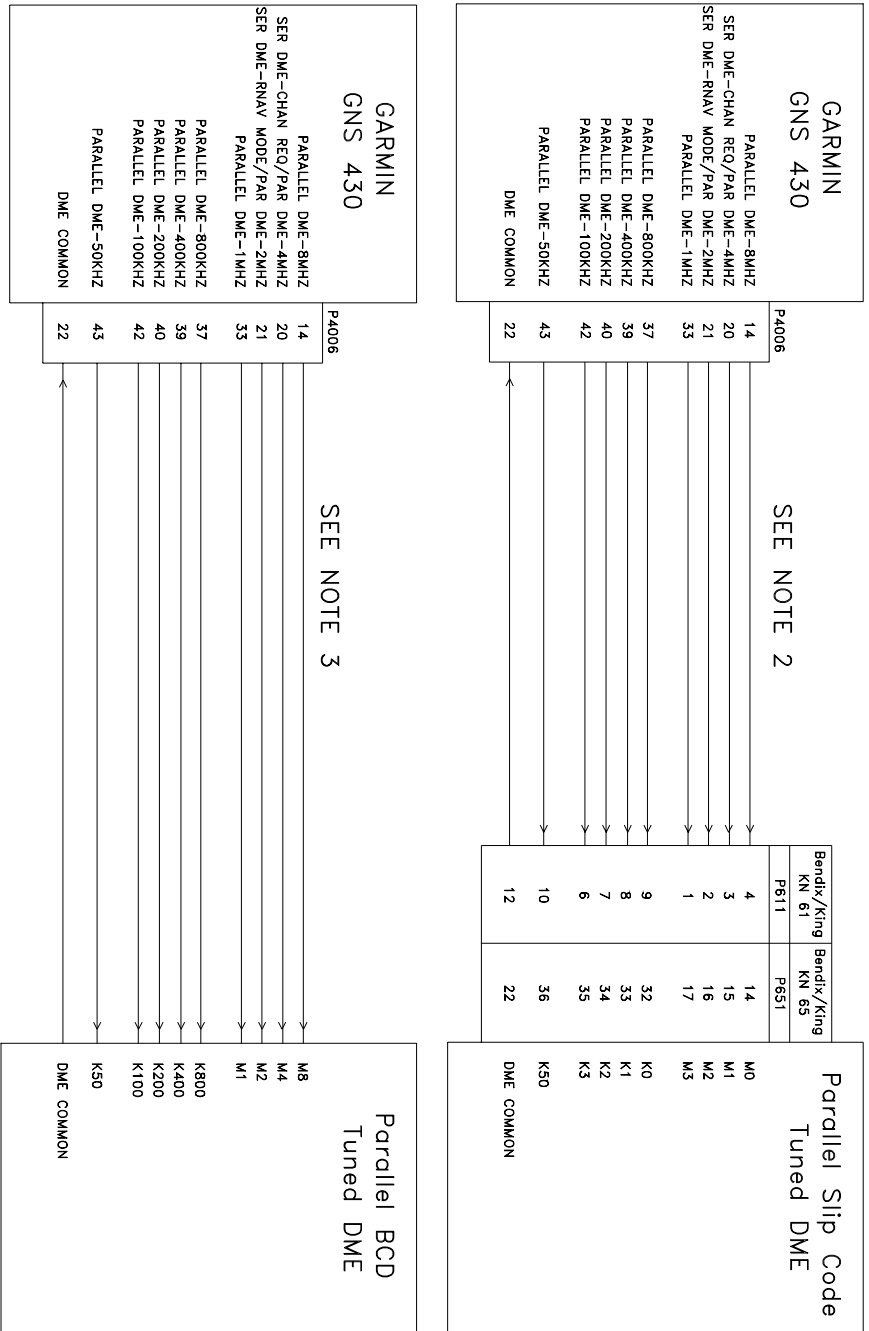

- NOTES:
1. ALL WIRES 24 AWG OR LARGER UNLESS OTHERWISE NOTED
 2. THE GNS 430 MUST BE CONFIGURED TO OUTPUT SLIP CODE DME TUNING DATA FOR PROPER OPERATION IN THIS CONFIGURATION.
 3. THE GNS 430 MUST BE CONFIGURED TO OUTPUT BCD DME TUNING DATA FOR PROPER OPERATION IN THIS CONFIGURATION.
 4. REFER TO MANUFACTURERS' DOCUMENTATION FOR COMPLETE PINOUT AND INTERCONNECT INFORMATION. PINOUTS OF OTHER UNITS SHOWN FOR REFERENCE ONLY.

Figure 4-25. Parallel BCD/Slip Code DME Tuning Interconnect

5. POST INSTALLATION CONFIGURATION & CHECKOUT PROCEDURE

5.1 CONFIGURATION MODE OPERATIONS

With power applied to the aviation rack and the 400 Series unit turned off, press and hold the ENT key and turn the unit on. Release the ENT key when the display activates. After the data base pages, the first page displayed is the MAIN ARINC 429 CONFIG page. While in Configuration Mode, pages can be selected by ensuring the cursor is off and rotating the small right knob.

To change data on the displayed Configuration Page, press the small right knob (CRSR) to turn on the cursor. Turn the large right knob to change between data fields. Turn the large or small right knob to change a field that the cursor is on. Once you have made the desired selection, press the ENT key to accept the entry.

5.2 INSTALLATION CONFIGURATION PAGES

The Configuration Pages described in the following sections are in the order found when rotating the right small knob clockwise starting at the MAIN ARINC 429 CONFIG page. Use the procedure described in section 5.1 to get to this page.

NOTE

The configuration pages shown here reflect MAIN software version 2.21. All Configuration Pages shown apply to the GNS 430, but not all apply to the GPS 400 or GNC 420. Those pages and fields that apply only to certain 400 Series units are denoted as such.

5.2.1 MAIN ARINC 429 CONFIG Page

Select the MAIN ARINC 429 CONFIG Page (see Figure 5-1). This page configures the GPS ARINC 429 output port, and the two GPS ARINC 429 input ports. The two input ports can each be configured independently for the desired function(s).



Figure 5-1.
MAIN ARINC 429 CONFIG Page

SPEED

Selection	Description
Low	Standard low-speed ARINC 429 (nominally 12.5 kilobits per second)
High	High-speed ARINC 429 (nominally 100 kilobits per second)

DATA IN 1, DATA IN 2

Selection	Description
Off	No unit connected to this ARINC 429 input
Airdata	Altitude, temperature, and speed information from the following Airdata systems: <i>B & D 2600, 2601, 2800, 90004-003</i> <i>Bendix/King KAD 280/480</i>
Airdata/AHRS	Heading, altitude, temperature, and speed information from an Airdata/AHRS system.
BFG SkyWatch	Traffic information from a BF Goodrich SKY497 Skywatch system.
EFIS	Selected course, heading, and joystick waypoint information from the following EFIS systems: <i>Bendix/King EFS 40/50</i> Certain versions of Collins EFIS may also be compatible with this format.
EFIS/Airdata	Selected course, heading, joystick waypoint, altitude, temperature, and speed information from the following systems: <i>Collins Pro Line 21</i>
Flight control	Selected course information from the following Flight Control systems: <i>Bendix/King KFC 400</i>

DATA IN 1, DATA IN 2, cont.

GARMIN GAD 42	Selected course, heading, and true airspeed data from the GARMIN GAD 42.
Honeywell EFIS	Selected course, heading, and joystick waypoint information from the following EFIS systems: <i>Honeywell Primus 1000</i>
INS/IRU	Heading information from the following Inertial systems: <i>Bendix/King KAH 460</i> <i>Collins AHC 85</i> <i>Honeywell Laseref</i> <i>Litef LTR 81</i> <i>Litton LTN 90-100, LTN 91, LTN 92</i>
Radar graphics	Joystick waypoint information from a RADAR graphics unit.
Sandel EHSI	Selected course and heading information from the following EHSI system: <i>Sandel SN3308</i>

DATA OUT

Selection	Description
Off	No unit(s) connected to ARINC 429 output
ARINC 429	Standard ARINC 429 output data (non-GAMA).
GAMA 429	ARINC 429 data as defined by the <i>General Aviation Manufacturers' Association (GAMA) General Aviation Subset, 2nd Edition</i> . The output data includes navigation and flight plan information to the following systems: <i>GARMIN GAD 42 Interface Adapter</i> <i>Bendix/King EFS 40/50</i> <i>Sandel SN3308</i> <i>Collins EFIS 84</i> Certain other of Collins EFIS systems may also be compatible with this format.
GAMA 429 Graphics	ARINC 429 data as defined by the <i>GAMA General Aviation Subset, 2nd Edition</i> including GAMA Graphics Protocol 'A'. This format outputs intersection symbols as generic waypoint symbols. The output data includes navigation and flight plan information (including graphical representation of flight plan procedures) to the following EFIS systems: <i>Honeywell Primus 1000</i>
GAMA 429 Graphics w/Int	ARINC 429 data as defined by the <i>GAMA General Aviation Subset, 2nd Edition</i> including GAMA Graphics Protocol 'A'. The output data includes navigation and flight plan information (including graphical representation of flight plan procedures).
GAMA 429 Pro Line 21	ARINC 429 data as defined by the <i>GAMA General Aviation Subset, 2nd Edition</i> . The output data includes navigation and flight plan information to the following EFIS systems: <i>Collins Pro Line 21</i>
GAMA 429 Sextant	ARINC 429 data as defined by the <i>GAMA General Aviation Subset, 2nd Edition</i> . The output data includes navigation and flight plan information to the following EFIS systems: <i>Sextant SMD 45</i>

SDI

Selection	Description
Common	Common long-range navigator (only 429 data with SDI=0 is used)
LNAV 1	Number 1 (Pilot) long-range navigator. Only 429 data with SDI=0 or SDI=1 is used.
LNAV 2	Number 2 (Copilot) long-range navigator. Only 429 data with SDI=0 or SDI=2 is used.

5.2.2 MAIN RS232 CONFIG Page

Select the MAIN RS232 CONFIG Page (see Figure 5-2). If necessary, change the selectable RS-232 inputs and/or outputs to match that of the equipment installed in the aircraft.

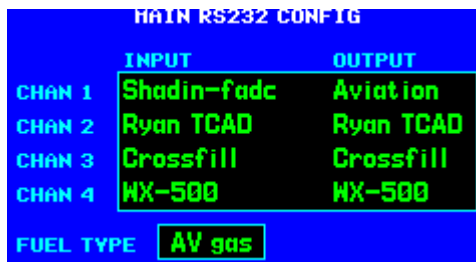


Figure 5-2. MAIN RS232 CONFIG Page

CHANNEL INPUTS

Selection	Description
Off	No unit(s) connected to input of this channel.
Arnav/ei-fuel	Serial fuel flow information from the following units: <i>ARNAV FC-10, FT-10</i> <i>Electronics International FP-5L</i>
Crossfill	Serial transfer of flight plans and user waypoints between two 400 Series units. If Crossfill is selected for a channel output, then Crossfill is automatically selected for that channel's input.
Icarus-alt	Serial altitude data from the following units: <i>Icarus Instruments 3000</i>
Ryan TCAD	Traffic information from a Ryan TCAD 9900B Series system.
Shadin-adc	Serial air data information from the following units: <i>Shadin ADC 200, 200+, 2000</i>
Shadin-alt	Serial altitude data from the following units: <i>Shadin 8800T, 9000T, 9200T</i>
Shadin-fadc	Serial air data and fuel flow information from the following units: <i>Shadin 9628XX-X Fuel/Air Data Computer</i>
Shadin-fuel	Serial fuel flow information from the following units: <i>Shadin 91204XM Digital Fuel Management System</i> <i>Shadin 91053XM Digital Fuel Management System</i> <i>JP Instruments EDM-700 or EDM-760 Engine Monitor</i>
WX-500	Lightning strike information from a BF Goodrich WX-500 Stormscope.

CHANNEL OUTPUTS

Selection	Description
Off	No unit(s) connected to output of this channel
Aviation	Serial position, altitude, velocity, and navigation data to the following units: <i>GARMIN GPSMAP 195 or GPS III Pilot</i> <i>Argus 3000, 5000, or 7000 Moving Map</i> <i>Electronics International FP-5L Fuel Flow Computer (non-TSO'd)</i> <i>JP Instruments EDM-700 or EDM-760 Engine Monitor</i> <i>Shadin 91204XM Digital Fuel Management System</i> <i>Shadin 91053XM Digital Fuel Management System</i> <i>Shadin 9628XX-X Fuel/Air Data Computer</i> <i>Stormscope Series II (with Navaid) Moving Map</i>
Avtn no alt	Serial position, velocity, and navigation data to the following units: <i>Horizon DDMP</i>
Crossfill	Serial transfer of flight plans and user waypoints between two 400 Series units
HW EGPWS	Serial communication to a Bendix/King (Honeywell) KGP 560 EGPWS.
Ryan TCAD	Serial communication with a Ryan TCAD 9900B Series system.
WX-500	Serial communication to a BF Goodrich WX-500 Stormscope.

FUEL TYPE

Selection	Description
AV gas	The aircraft is using Aviation gas (5.8 lbs./gal.)
Jet A	The aircraft is using Jet A or Jet A-1 fuel (6.7 lbs./gal.)
Jet B	The aircraft is using Jet B (JP-4) fuel (6.5 lbs./gal.)

5.2.3 MAIN INPUTS 1 Page

Select the MAIN INPUTS 1 Page (see Figure 5-3). This page (along with the MAIN INPUTS 2 Page) allows you to monitor the data on ARINC 429, RS-232 and other electrical inputs. This is used for verifying electrical interfaces during installation and troubleshooting. Information that is not being received by the 400 Series unit is dashed out.

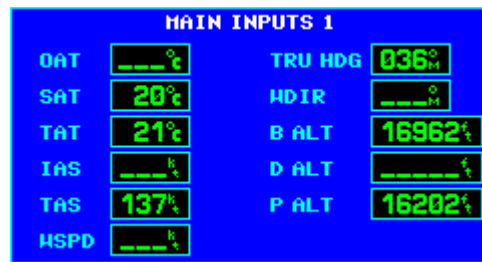


Figure 5-3. MAIN INPUTS 1 Page

Field	Description
OAT	Outside Air Temperature
SAT	Static Air Temperature
TAT	Total Air Temperature
IAS	Indicated Airspeed
TAS	True Airspeed
WSPD	Wind Speed
HDG	Heading (True or Magnetic)
WDIR	Wind Direction
B ALT	Barometric-corrected Altitude
D ALT	Density Altitude
P ALT	Pressure Altitude

5.2.4 MAIN INPUTS 2 Page

Select the MAIN INPUTS 2 Page (see Figure 5-4). This page is also used for verifying electrical interfaces during installation and troubleshooting. Information that is not being received by the 400 Series unit is dashed out.

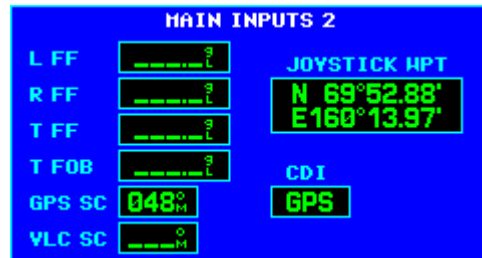


Figure 5-4. MAIN INPUTS 2 Page

Field	Description
L FF	Left Engine Fuel Flow
R FF	Right Engine Fuel Flow
T FF	Total Fuel Flow
T FOB	Total Fuel on Board
GPS SC	GPS Selected Course
VLC SC	VOR/LOC Selected Course (GNS 430 Only)
CDI	Status of the CDI key (GNS 430 Only)
JOYSTICK WPT	Latitude and longitude of a joystick waypoint sent by an EFIS or RADAR indicator.

5.2.5 INSTRUMENT PANEL SELF TEST Page

Select the INSTRUMENT PANEL SELF TEST Page (see Figure 5-5). This page allows verification that the 400 Series unit is communicating properly with other instruments. Compare on-screen indications with the information depicted on connected instruments, such as the CDI, HSI, RMI and/or external annunciators. It also displays fuel capacity, amount on-board, and flow.



Figure 5-5. INSTRUMENT PANEL SELF TEST Page

5.2.6 MAIN LIGHTING Page

Select the MAIN LIGHTING Page (see Figure 5-6). This page allows you to set display parameters that affect the display backlight and key lighting brightness. The DISPLAY and KEY lighting characteristics are adjusted separately, each with the following fields:

LIGHTING

Shows the current level of display backlighting, based on the lighting input source (lighting bus voltage, or the ambient light if the source is **PHOTO**) and the settings on this configuration page. This field has a range of 0 (zero) to 9999.

MAIN LIGHTING		
	DISPLAY	KEY
LIGHTING	9405	9296
SOURCE	PHOTO	28V DC
RESPONSE TIME	4	4
SLOPE	50	50
MINIMUM	080	40
OFFSET	50	50

Figure 5-6. MAIN LIGHTING Page

SOURCE

Selection	Description
PHOTO	Backlight level is determined by the ambient light level as measured by the photocell on the 400 Series unit.
14V DC	Backlight level tracks a 14 volt DC aircraft lighting buss.
28V DC	Backlight level tracks a 28 volt DC aircraft lighting buss.
5V DC	Backlight level tracks a 5 volt DC aircraft lighting buss.
5V AC	Backlight level tracks a 5 volt AC aircraft lighting buss.

NOTE

If a lighting buss (any selection other than **PHOTO**) is selected, and the lighting buss control is turned to its minimum (daytime) setting, the display brightness will track the 400 Series unit's photocell.

RESPONSE TIME

Sets the speed with which the brightness responds to the input level (buss voltage or ambient light) changes. The higher the number the slower the display responds. This field has a range of 3 to 7, and is set to 4 at the factory.

SLOPE

Sets the sensitivity the brightness of the display has to changes in the input level. The higher the number, the brighter the display will be for a given increase in the input level. This field has a range of 0 (zero) to 99, and is set to 50 at the factory.

MINIMUM

Sets the minimum brightness of the display. The higher the number, the brighter the minimum brightness. Display minimum brightness has a range of 35 to 999, and is set to 80 at the factory. Key minimum brightness has a range of 20 to 99, and is set to 40 at the factory. It is prudent to verify that display and key lighting characteristics match those of other equipment in the panel under night lighting conditions.

OFFSET

Adjusts the lighting level up or down for any given input level. This field has a range of 0 (zero) to 99, and is set to 50 at the factory. This may also be used to match lighting curves with other equipment in the panel.

If contrast isn't Acceptable, Place unit in Normal Mode. On the AUX menu SETUP page 2 highlight DISPLAY and press ENTER. The DISPLAY page is shown (see Figure 5-7). Confirm that CONTRAST MODE is "Auto". Highlight CONTRAST LEVEL and adjust to best viewable color. Press ENTER to confirm change.

		DISPLAY	
	MODE	LEVEL	
COM	122.800	BACKLIGHT	Auto 0000
VLOC	113.00	CONTRAST	Auto 125
ENR	117.95		
GPS			AUX 000

Figure 5-7.
DISPLAY Page (AUX Group)

NOTE

Note: Leave CONTRAST MODE in "Auto".

5.2.7 DATE/TIME SETUP Page

Select the DATE/TIME SETUP Page (see Figure 5-8). Very infrequently, it may be desirable to set the date and time of the 400 Series unit to aid in acquiring a GPS position. Configuration mode is the only means by which the date and time for the 400 Series unit may be adjusted. Note that the time must be UTC time, and that the UTC date may be different from the date in the local time zone.



Figure 5-8.
DATE/TIME SETUP Page

5.2.8 MAIN DISCRETE INPUTS Page

Select the MAIN DISCRETE INPUTS Page (see Figure 5-9) if the encoding altimeter input is used. Verify that the **DECODED ALTITUDE** field indicates the correct altitude.



Figure 5-9.
MAIN DISCRETE INPUTS Page

EXTERNAL SWITCH STATE

Selection	Verify That:
RMT CDI	The box is filled in while a remote CDI source select switch is pressed.
RMT OBS	The box is filled in while a remote OBS switch is pressed.

5.2.9 MAIN DISCRETE OUTPUTS Page

Select the MAIN DISCRETE OUTPUTS Page (see Figure 5-10). This page allows you to verify the operation of any external annunciators and switches that are present in the installation.



Figure 5-10.
MAIN DISCRETE OUTPUTS Page

DISCRETE TOGGLE

Selection	Verify That:
APR	The APR annunciator is active and inactive as selected on this page.
GPS	The GPS source select annunciator is active and inactive as selected on this page.
INTEG	The INTEG annunciator is active and inactive as selected on this page.
MSG	The MSG annunciator is active and inactive as selected on this page.
OBS	The OBS annunciator is active and inactive as selected on this page.
TERM	The TERM annunciator is active and inactive as selected on this page.
VLOC	The VLOC source select annunciator is active and inactive as selected on this page.
WPT	The WPT annunciator is active and inactive as selected on this page.
ILS/GPS APR	The ILS/GPS APPROACH output is active and inactive as selected on this page (NOTE: This output is connected to the autopilot ILS ENGAGE input, not to an annunciation, and therefore this is for bench testing purposes only).

5.2.10 MAIN CDI/OBS CONFIG Page

Select the MAIN CDI/OBS CONFIG Page (see Figure 5-11). This page allows you to verify the MAIN CDI outputs, both lateral (LAT) and vertical (VERT), and verify and calibrate the MAIN OBS input. Using the controls on the 400 Series unit front panel, make the selections below and verify the interfaces as appropriate:

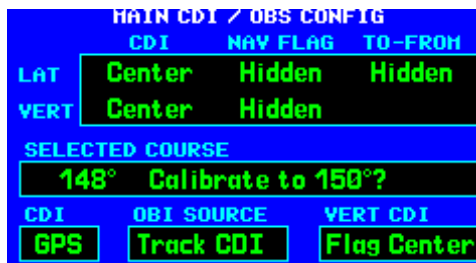


Figure 5-11.
MAIN CDI/OBS CONFIG Page

CDI (LAT/VERT)

Selection	Verify That:
Max left/up	The CDI is “pegged” to the left/up.
Full left/up	The CDI is deflected full scale to the left/up.
Center	The CDI is centered.
Full right/down	The CDI is deflected full scale to the right/down.
Max right/down	The CDI is “pegged” to the right/down.

NAV FLAG (LAT/VERT)

Selection	Verify That:
Hidden	The LAT/VERT flag is hidden.
In view	The LAT/VERT flag is in view.

TO-FROM

Selection	Verify That:
FROM	The FROM flag is in view.
Hidden	The TO/FROM flag is hidden.
TO	The TO flag is in view.

SELECTED COURSE

Select 150° on the CDI/HSI that is connected to the 400 Series unit's MAIN OBS inputs. The **SELECTED COURSE** field should indicate near to 150° and a **Calibrate to 150°?** field will appear. Selecting this field will calibrate the 400 Series unit to match the input source. Verify OBS operation by checking that the course displayed on the 400 Series unit is within 2° of the selected course. Do this at 30° intervals around the OBS card.

NOTE

If it is desired to ignore a selected course input (either analog resolver or ARINC 429) for GPS operation in OBS mode, press MENU on the MAIN CDI/OBS CONFIG page and select "Ignore SEL CRS?". When OBS mode is selected, this will cause selected course to be entered on the controls of the 400 Series unit.

CDI (GNS 430 Only)

Selection	Description
GPS	The GNS 430 CDI button is in the GPS state, and the GPS ANNUNCIATE output is active. This annunciator output may be required to be active for some installations.
VLOC	The GNS 430 CDI button is in the VLOC state, and the VLOC ANNUNCIATE output is active.

NOTE

If it is desired to disable the GNS 430 CDI key, press MENU on the MAIN CDI/OBS CONFIG page and select "Ignore CDI Key?". This will cause the field above the CDI key to always display GPS, regardless of CDI key presses. This may be necessary for certain EFIS systems where navigation sensor selection must be accomplished on the EFIS or its control panel.

OBI SOURCE (GNS 430 Only)

Selection	Description
Always GPS	The MAIN King Serial OBI outputs are always GPS. This is useful if it is desired to switch a Bendix/King KI 229 or KNI 582 RMI pointer independently from the GNS 430 CDI button.
Track CDI	The MAIN King Serial OBI outputs are GPS or VOR, and switchable by the GNS 430 CDI button. This is useful if it is desired the Bendix/King KI 229 or KNI 582 RMI pointer to display the same navigation source as the GNS 430 CDI outputs.

VERT CDI

Selection	Description
Flag Up	The vertical deviation bar is parked in the full-scale up position when GPS or VOR navigation is selected for output. The exception is when the CDI is in VLOC mode and an ILS frequency is tuned, in which case the vertical deviation bar will be parked in the centered position.
Flag Center	The vertical deviation bar is parked in the centered position whenever it is flagged.

5.2.11 COM SETUP Page (GNC 420 and GNS 430 Only)

Select the COM SETUP Page (see Figure 5-12). These values are set at the factory and seldom require calibration.



Figure 5-12. COM SETUP Page

FREQ

Selects a VHF communication frequency. For purposes of setting the squelch and sidetone levels, only the frequencies 118.000, 127.000, and 136.975 MHz can be used.

SPACING

Selection	Description
25.0 kHz	Selects traditional 25 kilohertz spacing (760 channel).
8.33 kHz	Selects 8.33 kilohertz channel spacing, which is required in some areas of the world.

CAUTION

8.33 kHz channels are not authorized for use in the United States.

SQ 250

Sets the squelch threshold for 25 kHz channel spacing operation. May be set to any value between 0 (zero) and 63. The higher the number, the less signal is required to break squelch.

NOTE

For GNS 430 units with serial number 200 or lower, the operation of the SQ 250 setting is reversed. The higher the SQ 250 number, the more signal is required to break squelch.

SQ 833

Sets the squelch threshold for 8.33 kHz channel spacing operation. May be set to any value between 0 (zero) and 63. The higher the number, the more signal is required to break squelch.

SIDETN

Sets the sidetone audio output level. May be set to any value between 0 (zero) and 63.

NOTE

The sidetone audio output level is independent of the COM volume knob on the 400 Series unit.

Store Calibration?

Select this field and press the ENT key to accept the squelch threshold and sidetone audio settings on this page. If you wish for the squelch and sidetone settings to return to their previous values, *do not* select this field. Simply change to the next configuration page, or turn off the unit if you are done with configuration.

Selection	Verify That:
PTT	The box is filled in while the COM push-to-talk switch is pressed.
XFR	The box is filled in while a remote COM transfer switch is pressed.
RX	The box is filled in while the COM is receiving a signal.
TX	The box is filled in while the COM push-to-talk switch is pressed.

5.2.12 VOR DISCRETE INPUTS Page (GNS 430 Only)

Select the VOR DISCRETE INPUTS Page (see Figure 5-13). This page allows you to verify the operation of an external VLOC transfer switch that may be present in the installation.



Figure 5-13.
VOR DISCRETE INPUTS Page

Selection	Verify That:
REMOTE XFR	The box is filled in while a remote VLOC transfer switch is pressed.

5.2.13 VOR/LOC/GS CDI Page (GNS 430 Only)

Select the VOR/LOC/GS CDI Page (see Figure 5-14). This page allows you to verify and calibrate the CDI outputs, both lateral (LAT) and vertical (VERT) from the VOR/LOC/Glideslope receiver, as well as the OBS resolver input to the VOR receiver. It also allows you to select the format for DME tuning data. Using the controls on the GNS 430 front panel, make the selections below and verify the interfaces as appropriate:

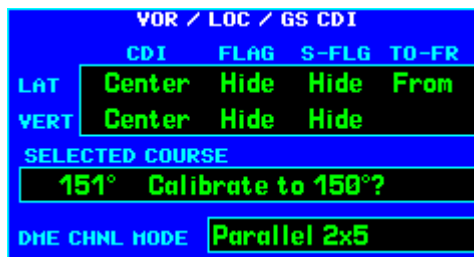


Figure 5-14.
VOR/LOC/GS CDI Page

NOTE

The LAT, VERT, and SELECTED COURSE configurations only apply to installations where a CDI/HSI is connected to the VOR/LOC/GLIDESLOPE pins on connector P4006.

CDI (LAT/VERT)

Selection	Verify That:
Max left/up	The CDI is “pegged” to the left/up.
Full left/up	The CDI is deflected full scale to the left/up.
Center	The CDI is centered.
Full right/down	The CDI is deflected full scale to the right/down.
Max right/down	The CDI is “pegged” to the right/down.

FLAG (LAT/VERT)

Selection	Verify That:
Hide	The LAT/VERT flag is hidden.
View	The LAT/VERT flag is in view.

S-FLG (LAT/VERT)

Selection	Verify That:
Hide	The LAT/VERT superflag is hidden.
View	The LAT/VERT superflag is in view.

TO-FR

Selection	Verify That:
FROM	The FROM flag is in view.
Hide	The TO/FROM flag is hidden.
TO	The TO flag is in view.

SELECTED COURSE

Select 150° on the CDI/HSI that is connected to the 400 Series VOR/LOC/GS OBS inputs. The **SELECTED COURSE** field should indicate near to 150° and a **Calibrate to 150°?** field will appear. Selecting this field will calibrate the 400 Series to match the input source. Verify OBS operation by checking that the course displayed on the 400 Series is within 2° of the selected course. Do this at 30° intervals around the OBS card.

DME CHNL MODE

This configuration allows you to set the format for DME tuning data output.

Selection	Description
King Serial	King Serial DME tuning data (not operational for MAIN software versions 2.02 and lower).
Parallel 2x5	2 of 5 parallel DME tuning.
Parallel BCD	Shifted BCD (Binary Coded Decimal) parallel DME tuning (not operational for MAIN software versions 2.02 and lower).
Parallel slip	Slip-code parallel DME tuning (not operational for MAIN software versions 2.02 and lower).
Narco 890/891	2 of 5 parallel DME tuning, compatible with the following DME units: <i>Narco DME 890</i> <i>Narco IDME 891</i> <i>ARC (Cessna) RTA-476A</i>

5.2.14 VOR/LOC/GS ARINC 429 CONFIG Page (GNS 430 Only)

Select the VOR/LOC/GS ARINC 429 CONFIG Page (see Figure 5-15). This page configures the VOR/ILS ARINC 429 output and input ports.

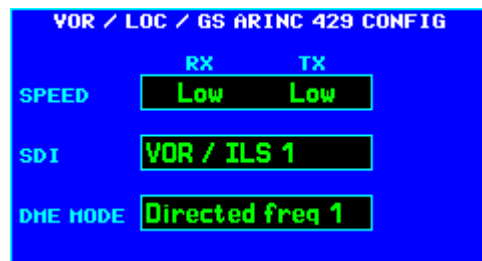


Figure 5-15. VOR/LOC/GS ARINC 429 CONFIG Page

SPEED

Selection	Description
Low	Standard low-speed ARINC 429 (nominally 12.5 kilobits per second)
High	High-speed ARINC 429 (nominally 100 kilobits per second)

SDI

Selection	Description
Common	Common VOR/ILS receiver (only 429 data with SDI=0 is used)
VOR/ILS 1	Number 1 (Pilot) VOR/ILS receiver. Only 429 data with SDI=0 or SDI=1 is used.
VOR/ILS 2	Number 2 (Copilot) VOR/ILS receiver. Only 429 data with SDI=0 or SDI=2 is used.

DME MODE

Selection	Description
Directed freq 1	If the GNS 430 is connected to a multi-channel ARINC 429 DME, channel 1 of that DME will be tuned. “Directed freq 1” should be selected if a single-channel ARINC 429 DME is to be tuned.
Directed freq 2	If the GNS 430 is connected to a multi-channel ARINC 429 DME, channel 2 of that DME will be tuned.

5.2.15 STORMSCOPE CONFIG Page
(Only if 400 Series unit configured for BFG WX-500 Stormscope interface)

Select the STORMSCOPE CONFIG Page (see Figure 5-16). This page shows the BF Goodrich WX-500 Stormscope configuration as reported by the WX-500 through RS-232 data.

Verify that the STATUS field indicates “Ok”, and that the other displayed parameters are correct. Verify that all the boxes in the lower portion of the page are green.



Figure 5-16.
STORMSCOPE CONFIG Page

When a 400 Series unit is used with a WX-500 Stormscope, the “Synchro” or “Serial” heading formats may be used. If another heading format is used, lightning strike information will be visible on the Weather Page, but not on the Map Page.

5.2.16 STORMSCOPE TEST Page
(Only if 400 Series unit configured for BFG WX-500 Stormscope interface)

Select the STORMSCOPE TEST Page (see Figure 5-17). This page shows current strike activity, WX-500 status, and the heading supplied by the WX-500. The WX-500 mode may be changed to ‘Demo’, ‘Noise monitor’, ‘Self test’, ‘Strike test’, or ‘Weather’.

Verify that the WX-500 mode can be changed. Refer to the WX-500 manual for specific installation test procedures for the WX-500, using this page to view strike data, change the WX-500 mode, view WX-500 status, trigger count, and heading.



Figure 5-17.
STORMSCOPE TEST Page

5.2.17 STORMSCOPE DOWNLOAD DATA Page
(Only if 400 Series unit configured for BFG WX-500 Stormscope interface)

Select the STORMSCOPE TEST Page (see Figure 5-18). This page shows raw data downloadable from the WX-500. Optional sets of data include WX-500 software version, environmental conditions, configuration, and fault data.

Verify that the configuration data is correct as intended. To request which packet of data to display, highlight the data group title and use the small right knob to select the desired group.



Figure 5-18. **STORMSCOPE DOWNLOAD DATA Page**

5.2.18 TRAFFIC Page

(Only if 400 Series unit configured for BFG Skywatch or Ryan TCAD interfaces)

Select the TRAFFIC Page (see Figure 5-19). This page shows the BFG Skywatch or Ryan TCAD modes of operation and current traffic situation.

For BFG Skywatch, this page shows:

1. The altitude mode—below (BLW), normal (NORM), above (ABV), or unrestricted (UNR)
2. The operating mode—standby (STBY) or operating (OPER)
3. Current altitude (ALT)
4. Altitude limits being imposed (LIM A and LIM B)
5. Heading, and barometric (BARO) and radio (RAD) altitude status.

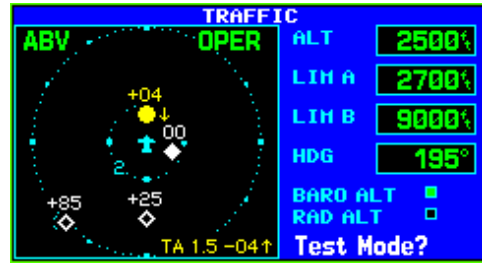


Figure 5-19. TRAFFIC Page (Skywatch)

For BFG Skywatch (see Figure 5-19), verify that the 400 Series unit can change the Skywatch operating mode (STBY or OPER). In standby mode, verify that the Skywatch may be placed in self-test mode by highlighting “Test Mode?” and pressing ENTER on the 400 Series unit. Refer to the BFG Skywatch installation manual for system checkout.

For Ryan TCAD (see Figure 5-20), this page shows the current shield mode and altitude. Verify that the TCAD shield mode may be changed—Ground (GND), Terminal (TML), Standard (STD), En Route (ENR), or Unrestricted (UNR), and that the TCAD is reporting the correct altitude. Refer to the Ryan TCAD installation manual for system checkout.



Figure 5-20. TRAFFIC Page (TCAD)

5.2.19 RYAN TCAD CONFIG Page

(Only if 400 Series unit configured for Ryan TCAD interface)

Select the RYAN TCAD CONFIG Page (see Figure 5-21). This page shows the TCAD’s current shield settings for the selected mode, approach mode status, volume, mute status, mute duration, voice alert selection, and system status.

Verify that the TCAD system status is GREEN. Also, verify that shield settings and volume, mute duration, and voice alert selection can be modified. Verify that changes in mute (if a mute switch is installed) are shown. Refer to the Ryan TCAD installation manual for system checkout.

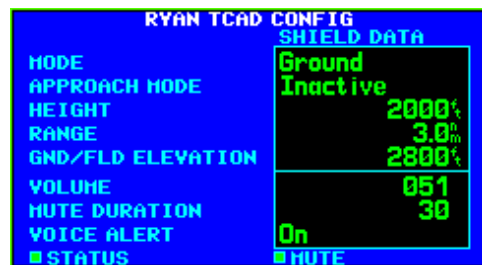


Figure 5-21. RYAN TCAD CONFIG Page

5.2.20 GAD 42 CONFIG Page

(Only if 400 Series unit configured for GAD 42 interface)

Select the GAD 42 CONFIG Page (see Figure 5-22). This page allows remote configuration of a GAD 42 Interface Adapter Unit. For details of this function, please refer to Section 5 of the GAD 42 Installation Manual (P/N 190-00159-00).

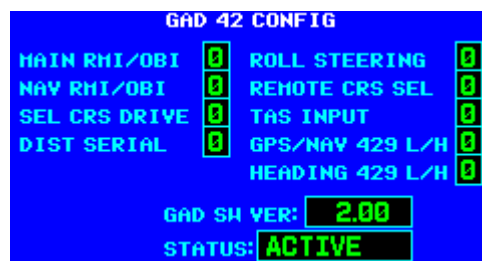


Figure 5-22. GAD 42 CONFIG Page

5.3 ADDITIONAL GROUND TESTS

5.3.1 Connector Engagement Test

1. Turn on the 400 Series unit, and turn on the avionics master switch (if applicable).
2. Place the 400 Series unit in the rack and engage the pawl mechanism.
3. Turn the Allen screw of the locking pawl slowly clockwise until the 400 Series unit just comes on. A “T” handle makes the turns easy to count, but do not over-tighten.
4. Count the number of complete revolutions you can turn the Allen screw until it can not turn any more (but take care not to over-tighten). Three turns is the minimum for proper installation. If fewer than three turns are possible, the mounting rack should be moved aft such that the aircraft panel does not obstruct the unit from engaging in the rack.

5.3.2 Verification of Self-test Data

Following normal power-up, the Self Test Page will be displayed followed by the Data Base Page. During this time, many of the electrical outputs are activated so the installation, configuration, and wiring may be verified. Before approving the Data Base Page, verify that the following parameters are displayed on equipment in the aircraft as listed below:

NOTE

Electronic displays which monitor the 400 Series unit’s ARINC 429 output may vary in how and where annunciations are displayed. Generally, it is not required to verify every data field with an ARINC 429 interface. Correct display of a subset of the data without noting any discrepancies is typically adequate evidence of correct ARINC 429 operation.

Parameter	Self-test Value
Course Deviation	Half-scale left deviation, TO indication, flag pulled
Glideslope/Vert. Deviation	Half-scale up deviation, flag pulled
Bearing to Waypoint	135°
Desired Track	149.5°
Selected Course	149.5°
Distance to Go	10.0 nautical miles
Time to Go	4 minutes
Active Waypoint	“GARMN”
Groundspeed	150 knots
Present Position	N 39°04.05’, W 94°53.86’
Waypoint Alert	Active
Phase of Flight	En Route
Message Alert	Active
Leg/OBS Mode	Leg Mode
GPS Integrity	Reflects actual GPS integrity

5.3.3 Signal Acquisition Test

Upon approval of the Data Base Page, the Satellite Status Page will be displayed. If the unit is unable to acquire satellites, relocate the aircraft away from obstructions which might be shading GPS reception. If the situation does not improve, check the GPS antenna installation.

Once GPS position information is available, use the DIRECT-TO key to activate the navigation function to a nearby airport, NAVAID, or intersection. Ensure that any connected equipment is transmitting and or/receiving data from the 400 Series unit and is functioning properly (see the Pilot’s Guide for more information on the direct-to function).

5.3.4 Deviation & Flags Check

5.3.4.1 Analog Deviation & Flags

The analog deviation (LEFT/RIGHT and UP/DOWN), TO/FROM, and FLAG (lateral and vertical) outputs to a CDI or HSI should be verified in flight with potential sources of electrical noise such as autopilot, flaps, gear, heater blowers, etc. operating. Lateral deviation and flags may be checked with either GPS or VOR/ILS, and vertical deviation and flags must be checked with Glideslope. Verify that the flags are hidden at the correct times, and that the flag is in view at the correct times.

5.3.4.2 EHSI Deviation Scaling (Only if HSI/CDI is driven by the 400 Series unit via serial data)

With the 400 Series unit locked onto a GPS fix, activate an OBS waypoint about 20 nautical miles from the present position.

1. With 5.0 nautical mile CDI sensitivity, adjust the OBS course for approximately half-scale deflection on the 400 Series unit's Default Navigation page. Verify that the EHSI displays a similar half-scale deviation.
2. Repeat step 1 with 1.0 nautical mile CDI sensitivity. The CDI sensitivity may be manually set on the AUX SETUP page, using the "CDI / ALARMS" menu item.
3. Repeat step 1 with 0.3 nautical mile CDI sensitivity.

5.3.5 Crossfill Check (Only if dual units installed with RS-232 crossfill connected)

Turn on both 400 Series units in the aircraft. For each 400 Series unit:

1. Select the first AUX page (titled "FLIGHT PLANNING").
2. Select "CROSSFILL".
3. Verify that the displayed status is "Ready". If "Not Available" is displayed, there may be an RS-232 wiring problem between the two 400 Series units.

5.3.6 VHF COM Interference Check (GNC 420 and GNS 430 Only)

Once the Signal Acquisition Test has been completed successfully, perform the following steps:

1. View the Satellite Status Page and verify that 7 to 8 satellites have been acquired.
2. Verify that the GPS "NAV" flag is out of view.
3. Select 121.150 MHz on the 400 Series COM transceiver.
4. Transmit for a period of 20 seconds.
5. Verify that the GPS "NAV" flag does not come into view.
6. Repeat steps 4 and 5 for the following frequencies:
 - 121.175 MHz
 - 121.200 MHz
 - 131.250 MHz
 - 131.275 MHz
 - 131.300 MHz
7. Repeat steps 3 through 6 for all COM transceivers installed in the aircraft.
8. If the GPS "NAV" flag comes into view, refer to Section 2.2.7 for options to improve performance.

5.3.7 VHF COM Check (GNC 420 and GNS 430 Only)

A flight test is recommended after the installation is complete to ensure satisfactory performance. To check the communications transceiver, maintain an appropriate altitude and contact a ground station facility at a range of at least 50 nautical miles. Contact a close ground station. Press the squelch disable button to defeat the automatic squelch feature and listen for any unusual electrical noise which would increase the squelch threshold. If possible, verify the communications capability on both the high and low ends of the VHF COM band. It may be required by the governing regulatory agency to verify operation of the COM transmitter and receiver at the extents of a ground facility's service volume (e.g., FAA AC 23-8A).

5.3.8 VOR/ILS Check (GNS 430 Only)

Select a VOR channel within a 40 nautical mile range. Listen to the VOR audio and verify that no electrical interference such as magneto noise is present. Check the tone identifier filter operation. Fly inbound or outbound on a selected VOR radial and check for proper LEFT/RIGHT, TO/FROM, and FLAG indications. Check the VOR accuracy. Verify that the flag is hidden with a valid received station, and that the flag is in view when there is not a received station. It may be required by the governing regulatory agency to verify operation of the VOR receiver at the extents of a ground facility's service volume (e.g., FAA AC 23-8A).

5.3.9 DME Tuning Check (GNS 430 Only)

Select a VOR/ILS channel that corresponds to (1) a DME station within a 40 nautical mile range, or (2) the frequency of a DME ground tester. Verify that the DME locks on to the signal and a valid distance, groundspeed and time are displayed.

Appendix A. CERTIFICATION DOCUMENTS

A.1 Continued Airworthiness

This section provides assistance to the installing agency in preparing Instructions for Continued Airworthiness (ICA) in response to Bulletin Number HBAW 98-18, "Checklist for Instructions for Continued Airworthiness for Major Alterations Approved Under the Field Approval Process", effective 10/7/98.

Aviation Authority approved installers are hereby granted permission to reference appropriate service instructions and excerpts from this Installation Manual to accomplish the Instructions for Continued Airworthiness. This permission does not construe suitability of the documents. It is the applicant's responsibility to determine the suitability of the documents for the ICA.

Following is a suggested ICA for a GARMIN 400 Series unit installation. Some of the checklist items do not apply, in which case they should be marked "N/A" (Not Applicable). In this sample, square braces are used to indicate instances where explicit words should be substituted (e.g., replace "[400 Series unit]" with "GNS 430").

Instructions for Continued Airworthiness, GARMIN [400 Series unit]

1. Introduction

[Aircraft that has been altered: Registration (N-) number, Make, Model and Serial Number]

Content, Scope,

Purpose and Arrangement: This document identifies the Instructions for Continued Airworthiness for the modification of the above aircraft by installation of a GARMIN [400 Series unit].

Applicability: Applies to aircraft altered by installation of the GARMIN [400 Series unit].

Definitions and Abbreviations: None, N/A.

Precautions: None, N/A.

Units of Measurement: None, N/A.

Referenced Publications: GARMIN 400 Series Installation Manual, P/N 190-00140-02
GARMIN 400 Series Maintenance Manual, P/N 190-00140-05
GARMIN STC # [applicable STC number for the specific model installed, refer to Appendix B of this manual].
GARMIN Sample Flight Manual Supplement, P/N [part number of the applicable SAFMS, refer to section 3.1 of this manual].
GARMIN [400 Series unit] Pilot's Guide, P/N [part number of the applicable Pilot's Guide].

Distribution: This document should be a permanent aircraft record.

2. Description of the Alteration

Installation of the GARMIN [400 Series unit], with interface to external altitude encoder and CDI [include other equipment/systems as appropriate]. Refer to section 1.2, and sections 4.x.1 of this manual for interconnect information. Antenna installation, removal and replacement should be in accordance with applicable provisions of AC43.13-1B and 43.13-2A.

3. Control, Operation Information

Refer to the [400 Series unit] Pilot's Guide.

4. Servicing Information

N/A

5. Maintenance Instructions

Maintenance of the [400 Series unit] is 'on condition' only. Periodic maintenance is not required. Refer to the 400 Series Maintenance Manual.

6. Troubleshooting Information

Refer to the 400 Series Maintenance Manual.

7. Removal and Replacement Information

Refer to section 3.8 of this manual. If the unit is removed and reinstalled, a functional check of the equipment should be conducted in accordance with section 5.3 of this manual.

8. Diagrams

Refer to sections 3 and 4 of this manual.

9. Special Inspection Requirements

N/A

10. Application of Protective Treatments

N/A

11. Data: Relative to Structural Fasteners

Antenna installation, removal and replacement should be in accordance with applicable provisions of AC43.13-1A and 43.13-2A. Also, refer to section 3.7 of this manual.

12. Special Tools

N/A

13. This Section is for Commuter Category Aircraft Only

A. Electrical loads: Refer to section 1.3.2 of this manual.

B. Methods of balancing flight controls: N/A.

C. Identification of primary and secondary structures: N/A.

D. Special repair methods applicable to the airplane: Antenna installation, removal, and replacement should be in accordance with applicable provisions of AC43.13-1B and 43.13-2A.

14. Overhaul Period

No additional overhaul time limitations.

15. Airworthiness Limitation Section

Refer to the [400 Series unit] Sample Flight Manual Supplement.

16. Revision

To revise this ICA, a letter must be submitted to the local FSDO with a copy of the revised FAA Form 337, and revised ICA. The FAA inspector accepts the change by signing Block 3 and including the following statement:

“The attached revised/new Instructions for Continued Airworthiness (date _____) for the above aircraft or component major alteration have been accepted by the FAA, superseding the Instructions for Continued Airworthiness (date _____).”

17. Assistance

Flight Standards Inspectors have the resources to respond to questions regarding the ICA.

18. Implementation and Record Keeping

For major alterations performed in accordance with FAA field approval policy, the owner/operator operating under Part 91 is responsible for ensuring that the ICA is made part of the applicable section 91.409 inspection program for their aircraft. This is accomplished when a maintenance entry is made in the aircraft's maintenance record in accordance with section 43.9. This entry records the major alteration and identifies the original ICA location (e.g., Block 8 of FAA Form 337, dated _____) along with a statement that the ICA is now part of the aircraft's inspection/maintenance requirements.

A.2 Environmental Qualification Form—GNS 430

NOMENCLATURE: GNS 430 Airborne GPS/VOR/ILS/COM System

TYPE/MODEL/PART NO.: 010-00139-(), which includes 011-00280-00

TSO/JTSO COMPLIANCE: TSO-C129a Class A (1) (GPS)
 TSO-C37d Class 4 & 6, JTSO-2C37e (COM TRANSMITTER)
 TSO-C38d Class C & E, JTSO-2C38e (COM RECEIVER)
 TSO-C40c, JTSO-2C40c (VOR RECEIVER)
 TSO-C36e, JTSO-C36e (LOCALIZER RECEIVER)
 TSO-C34e, JTSO-C34e (GLIDESLOPE RCVR.)

MANUFACTURER'S SPECIFICATION AND/OR OTHER

APPLICABLE SPECIFICATION: 004-00044-00

MANUFACTURER: GARMIN International, Inc.

ADDRESS: 1200 E. 151st Street, Olathe, Kansas 66062

NOTE: The following information provides examples only. It is not intended to be a comprehensive listing of all test conditions.

Conditions	Section	Description of Conducted Tests
Temperature and Altitude	4.0	Equipment tested to Categories A1 & D1
Low Temperature	4.5.1	
High Temperature	4.5.2. & 4.5.3	
In-flight Loss of Cooling	4.5.4	Equipment tested to Category Y
Altitude	4.6.1	
Decompression	4.6.2	
Overpressure	4.6.3	Not tested
Temperature Variation	5.0	Equipment tested to Category C
Humidity	6.0	Equipment tested to Category A
Shock	7.0	
Operational	7.2	Equipment tested per DO-160C, Par. 7.2.1
Crash Safety	7.3	Equipment tested per DO-160C, Par. 7.3.1 and 7.3.2
Vibration	8.0	Equipment tested without shock mounts to Categories B, M & N
Explosion	9.0	Equipment identified as Category X, no test required
Waterproofness	10.0	Equipment identified as Category X, no test required
Fluids Susceptibility	11.0	Equipment identified as Category X, no test required
Sand and Dust	12.0	Equipment identified as Category X, no test required
Fungus	13.0	Equipment identified as Category X, no test required
Salt Spray	14.0	Equipment identified as Category X, no test required
Magnetic Effect	15.0	Equipment tested is Class Z
Power Input	16.0	Equipment tested to Category B
Voltage Spike	17.0	Equipment tested to Category A
Audio Frequency Susceptibility	18.0	Equipment tested to Category B
Induced Signal Susceptibility	19.0	Equipment tested to Category A
Radio Frequency Susceptibility	20.0	Equipment tested to Category T
Radio Frequency Emission	21.0	Equipment tested to Category Z
Lightning Induced Transient Susc.	22.0	Equipment tested to Category ZZZZ per DO-160D. See report 005-00096-72 for details
Lightning Direct Effects	23.0	Equipment identified as Category X, no test required
Icing	24.0	Equipment identified as Category X, no test required

A.3 Environmental Qualification Form—GNC 420

NOMENCLATURE: GNC 420 Airborne GPS/COM System
TYPE/MODEL/PART NO.: 010-00173-(), which includes 011-00506-00
TSO/JTSO COMPLIANCE: TSO-C129a Class A (1) (GPS)
 TSO-C37d Class 4 & 6, JTSO-2C37e (COM TRANSMITTER)
 TSO-C38d Class C & E, JTSO-2C38e (COM RECEIVER)

MANUFACTURER'S SPECIFICATION AND/OR OTHER

APPLICABLE SPECIFICATION: 004-00044-00

MANUFACTURER: GARMIN International, Inc.

ADDRESS: 1200 E. 151st Street, Olathe, Kansas 66062

NOTE: The following information provides examples only. It is not intended to be a comprehensive listing of all test conditions.

Conditions	Section	Description of Conducted Tests
Temperature and Altitude	4.0	Equipment tested to Categories A1 & D1
Low Temperature	4.5.1	
High Temperature	4.5.2. & 4.5.3	
In-flight Loss of Cooling	4.5.4	Equipment tested to Category Y
Altitude	4.6.1	
Decompression	4.6.2	
Overpressure	4.6.3	Not tested
Temperature Variation	5.0	Equipment tested to Category C
Humidity	6.0	Equipment tested to Category A
Shock	7.0	
Operational	7.2	Equipment tested per DO-160C, Par. 7.2.1
Crash Safety	7.3	Equipment tested per DO-160C, Par. 7.3.1 and 7.3.2
Vibration	8.0	Equipment tested without shock mounts to Categories B, M & N
Explosion	9.0	Equipment identified as Category X, no test required
Waterproofness	10.0	Equipment identified as Category X, no test required
Fluids Susceptibility	11.0	Equipment identified as Category X, no test required
Sand and Dust	12.0	Equipment identified as Category X, no test required
Fungus	13.0	Equipment identified as Category X, no test required
Salt Spray	14.0	Equipment identified as Category X, no test required
Magnetic Effect	15.0	Equipment tested is Class Z
Power Input	16.0	Equipment tested to Category B
Voltage Spike	17.0	Equipment tested to Category A
Audio Frequency Susceptibility	18.0	Equipment tested to Category B
Induced Signal Susceptibility	19.0	Equipment tested to Category A
Radio Frequency Susceptibility	20.0	Equipment tested to Category T
Radio Frequency Emission	21.0	Equipment tested to Category Z
Lightning Induced Transient Susc.	22.0	Equipment tested to Category ZZZZ per DO-160D. See report 005-00096-72 for details
Lightning Direct Effects	23.0	Equipment identified as Category X, no test required
Icing	24.0	Equipment identified as Category X, no test required

A.4 Environmental Qualification Form—GPS 400

NOMENCLATURE: GPS 400 Airborne GPS System
TYPE/MODEL/PART NO.: 010-00171(-), which includes 011-00504-00
TSO/JTSO COMPLIANCE: TSO-C129a Class A (1) (GPS)
MANUFACTURER'S SPECIFICATION AND/OR OTHER APPLICABLE SPECIFICATION: 004-00044-00
MANUFACTURER: GARMIN International, Inc.
ADDRESS: 1200 E. 151st Street, Olathe, Kansas 66062

NOTE: The following information provides examples only. It is not intended to be a comprehensive listing of all test conditions.

Conditions	Section	Description of Conducted Tests
Temperature and Altitude	4.0	Equipment tested to Categories A1 & D1
Low Temperature	4.5.1	
High Temperature	4.5.2. & 4.5.3	
In-flight Loss of Cooling	4.5.4	Equipment tested to Category Y
Altitude	4.6.1	
Decompression	4.6.2	
Overpressure	4.6.3	Not tested
Temperature Variation	5.0	Equipment tested to Category C
Humidity	6.0	Equipment tested to Category A
Shock	7.0	
Operational	7.2	Equipment tested per DO-160C, Par. 7.2.1
Crash Safety	7.3	Equipment tested per DO-160C, Par. 7.3.1 and 7.3.2
Vibration	8.0	Equipment tested without shock mounts to Categories B, M & N
Explosion	9.0	Equipment identified as Category X, no test required
Waterproofness	10.0	Equipment identified as Category X, no test required
Fluids Susceptibility	11.0	Equipment identified as Category X, no test required
Sand and Dust	12.0	Equipment identified as Category X, no test required
Fungus	13.0	Equipment identified as Category X, no test required
Salt Spray	14.0	Equipment identified as Category X, no test required
Magnetic Effect	15.0	Equipment tested is Class Z
Power Input	16.0	Equipment tested to Category B
Voltage Spike	17.0	Equipment tested to Category A
Audio Frequency Susceptibility	18.0	Equipment tested to Category B
Induced Signal Susceptibility	19.0	Equipment tested to Category A
Radio Frequency Susceptibility	20.0	Equipment tested to Category T
Radio Frequency Emission	21.0	Equipment tested to Category Z
Lightning Induced Transient Susc.	22.0	Equipment tested to Category ZZZZ per DO-160D. See report 005-00096-72 for details
Lightning Direct Effects	23.0	Equipment identified as Category X, no test required
Icing	24.0	Equipment identified as Category X, no test required

A.5 Environmental Qualification Form—GA 56

NOMENCLATURE: GA 56, GPS Aviation Antenna

TYPE/MODEL/PART NO.: 011-00134-00 (Stud Mount)
011-00147-00 (Flange Mount)

TSO COMPLIANCE: C129 Class A (1)

MANUFACTURER'S SPECIFICATION AND/OR OTHER

APPLICABLE SPECIFICATION: 004-00015-00

MANUFACTURER: GARMIN International, Inc.

ADDRESS: 1200 E. 151st Street, Olathe, Kansas 66062

NOTE: The following information provides examples only. It is not intended to be a comprehensive listing of all test conditions.

Conditions	Section	Description of Conducted Tests
Temperature and Altitude	4.0	Equipment tested to Category F2
Low Temperature	4.5.1	
High Temperature	4.5.2. & 4.5.3	
In-flight Loss of Cooling	4.5.4	Cooling air not required
Altitude	4.6.1	
Decompression	4.6.2	Not tested
Overpressure	4.6.3	Not tested
Temperature Variation	5.0	Equipment tested to Category A
Humidity	6.0	Equipment tested to Category C
Shock	7.0	Equipment tested per DO-160C, Par. 7.2.1
Operational	7.2	
Crash Safety	7.3	Not Applicable
Vibration	8.0	Equipment tested without shock mounts to Categories C, L, M & Y
Explosion	9.0	Equipment identified as Category X, no test required
Waterproofness	10.0	Equipment tested to Category S
Fluids Susceptibility	11.0	Equipment tested to Category F with Ethylene Glycol De-Icing Fluid
Sand and Dust	12.0	Equipment identified as Category X, no test required
Fungus	13.0	Equipment identified as Category X, no test required
Salt Spray	14.0	Equipment identified as Category X, no test required
Magnetic Effect	15.0	Equipment identified as Category X, no test required
Power Input	16.0	Equipment identified as Category X, no test required
Voltage Spike	17.0	Equipment identified as Category X, no test required
Audio Frequency Susceptibility	18.0	Equipment identified as Category X, no test required
Induced Signal Susceptibility	19.0	Equipment tested to Category A
Radio Frequency Susceptibility	20.0	Equipment tested to Category T
Radio Frequency Emission	21.0	Equipment tested to Category Z
Lightning Induced Transient Susc.	22.0	Equipment identified as Category XXXX, no test required
Lightning Direct Effects	23.0	Equipment tested to Category 2A
Icing	24.0	Equipment tested to Category C

Appendix B. STC Permission

Consistent with N8110.69 or Order 8110.4, Aviation Authority approved installers are hereby granted permission to use STC's #SA00705WI (GNS 430), #SA00801WI (GNC 420), and #SA00800WI (GPS 400) data to modify aircraft.

United States of America
Department of Transportation -- Federal Aviation Administration
Supplemental Type Certificate

Number SA00705WI

This certificate issued to Garmin International
1200 E 51st St.
Olathe, KS 66062

certifies that the change in the type design for the following product with the limitations and conditions therefor as specified hereon meets the airworthiness requirements of Part 3 of the Civil Air Regulations.

Original Product - Type Certificate Number : A3S0
Make : Piper
Model : PA-32

Description of Type Design Change:

Installation of GARMIN GNS 430 VHF Communication Transceiver / VOR/ILS Receiver / GPS Receiver in accordance with (1) Garmin Corporation Master Drawing List, Drawing No. 005-00051-00, Revision H, dated September 22, 1998, and (2) FAA Approved Airplane Flight Manual Supplement for Piper PA32 with GARMIN GNS 430 VHF Communication Transceiver / VOR/ILS Receiver / GPS Receiver, Document No. 190-00140-03, Revision A, dated October 2, 1998, or later FAA approved revision to (1) or (2).

Limitations and Conditions:

Compatibility of this design change with previously approved modifications must be determined by the installer.

If the holder agrees to permit another person to use this certificate to alter the product, the holder shall give the other person written evidence of that permission.

This certificate and the supporting data which is the basis for approval shall remain in effect until surrendered, suspended, revoked or a termination date is otherwise established by the Administrator of the Federal Aviation Administration.

Date of application : November 26, 1997

Date reissued :

Date of issuance : October 02, 1998

Date amended :



By direction of the Administrator

C. Dale Bleakney
(Signature)

C. Dale Bleakney
Program Manager
Wichita Aircraft Certification Office

(Title)

Any alteration of this certificate is punishable by a fine of not exceeding \$1,000, or imprisonment not exceeding 3 years, or both.

FAA FORM 8110-2(10-68)

PAGE 1 of 1 PAGES

This certificate may be transferred in accordance with FAR 21.47.

United States of America
Department of Transportation -- Federal Aviation Administration
Supplemental Type Certificate

Number SA00801WI

This certificate issued to Garmin International
1200 E 51st St.
Olathe, KS 66062

certifies that the change in the type design for the following product with the limitations and conditions therefor as specified hereon meets the airworthiness requirements of Part 3 of the Civil Air Regulations.

Original Product - Type Certificate Number : A350
Make : Piper
Model : PA32

Description of Type Design Change:

Installation of GARMIN GNC 420 in accordance with (1) GARMIN Dwg No. 005-C0076-00, Revision B, dated 6/17/99, "Master Dwg List, GNC 420 Installation in Piper PA32", and (2) FAA Approved Flight Manual Supplement (AFMS) for Piper PA32 "GARMIN GNC 420 VHF Communication Transceiver/GPS Receiver" Revision A, dated 7/6/99, or later FAA Approved Revisions of (1) or (2).

Limitations and Conditions :

Compatibility of this design change with previously approved modifications must be determined by the installer. If the holder agrees to permit another person to use this certificate to alter the product, the holder shall give the other person written evidence of that permission.

This certificate and the supporting data which is the basis for approval shall remain in effect until surrendered, suspended, revoked or a termination date is otherwise established by the Administrator of the Federal Aviation Administration.

Date of application : November 10, 1998

Date reissued :

Date of issuance : July 06, 1999

Date amended :



By direction of the Administrator

Tina J. Miller
(Signature)

Tina L. Miller
Program Manager
Wichita Aircraft Certification Office

(Title)

Any alteration of this certificate is punishable by a fine of not exceeding \$1,000, or imprisonment not exceeding 3 years, or both.

FAA FORM 8119-2(10-68)

PAGE 1 of 2 PAGES

This certificate may be transferred in accordance with FAR 21.47.

United States of America
Department of Transportation -- Federal Aviation Administration
Supplemental Type Certificate

Number SA00800WI

This certificate issued to Garmin International
1200 E 51st St.
Olathe, KS 66062

certifies that the change in the type design for the following product with the limitations and conditions therefor as specified herein meets the airworthiness requirements of Part 3 of the Civil Air Regulations.

Original Product - Type Certificate Number : A350
Make : Piper
Model : PA32

Description of Type Design Change:

Installation of GARMIN GPS 400 in accordance with (1) GARMIN Dwg No. 005-C0084-40, Revision B, dated 6/17/99, "Master Dwg List, GPS 400 Installation in Piper PA32", and (2) FAA Approved Flight Manual Supplement (AFMS) for Piper PA32 "GARMIN GPS 400 Receiver" Revision A, dated 7/6/99, or later FAA Approved Revisions of (1) or (2).

Limitations and Conditions :

Compatibility of this design change with previously approved modifications must be determined by the installer. If the holder agrees to permit another person to use this certificate to alter the product, the holder shall give the other person written evidence of that permission.

This certificate and the supporting data which is the basis for approval shall remain in effect until surrendered, suspended, revoked or a termination date is otherwise established by the Administrator of the Federal Aviation Administration.

Date of application : November 10, 1998

Date reissued :

Date of issuance : July 06, 1999

Date amended :



By direction of the Administrator

Tina L. Miller
(Signature)

Tina L. Miller
Program Manager
Wichita Aircraft Certification Office

(Title)

Any alteration of this certificate is punishable by a fine of not exceeding \$1,000, or imprisonment not exceeding 3 years, or both.

FAA FORM 8110-2(10-68)

PAGE 1 of 2 PAGES

This certificate may be transferred in accordance with FAR 21.47.



INSTALLATION MEMORANDUM

TO: GARMIN Authorized Dealers
FROM: GARMIN International
DATE: January 25, 1999
SUBJECT: GNS 430 approval basis without external switching or annunciation
CC: Wichita Aircraft Certification Office

Due to reluctance by GARMIN Authorized Dealers and FAA Flight Standard District Office Field Inspectors to install and approve GARMIN GNS 430 Integrated VHF Communications, VHF Navigation and GPS Receiver equipment in certain installations, GARMIN is issuing this letter to clarify the approval basis for accomplishing such installations without external switching or annunciation.

GARMIN obtained initial TSO and STC approval under TSO-C129(a) in conjunction with AC 20-138 for the GPS Receiver of the GNS 430 in a Piper Cherokee PA32-260 without external switching or annunciation. The certification was accomplished under the jurisdiction of the Wichita Aircraft Certification Office with the basis for approval as follows:

1. The GNS 430 was panel mounted in the center radio stack. Normal field of view has been interpreted to be from the airspeed indicator to and including the center radio stack. Therefore, mounting of the GNS 430 was accomplished in the pilot's normal field of view.
2. GPS receiver mode, CDI source information, leg sequencing, loss of integrity (RAIM), message and waypoint alert annunciations are located on the GNS 430 display. Color and size of these annunciations were chosen to provide optimal recognition and color association with the related condition. Both color and size were a determining factor in this approval.
3. The GNS 430 CDI source information switching is accomplished internally, therefore the switch used to determine the source of CDI source information on the associated indicator is located on the GNS 430.

Follow-on IFR airworthiness approval was accomplished under the STC process on a Mooney M20J incorporating dual GNS 430 receivers. Approval was granted on the Mooney installation without the requirement for external switching or annunciation under the same guidance aforementioned. Installations which deviate from this guidance may have additional requirements imposed such as external annunciation. The GNS 430 provides interfaces for such installations.

For the Piper Cherokee PA32-260 approval, reference STC SA00705W1 dated October 2, 1998. For the Mooney M20J dual GNS 430 installation, reference STC SA00735W1 dated January 19, 1999. Also see the attached Wichita ACO letter affirming approval of the GNS 430 system without external switching or annunciation and guidance to consider when installing GNS 430 systems to avoid external switching and annunciation.

Sincerely,

A handwritten signature in cursive script that reads "Bill Stone".

Bill Stone
Avionics Product Manager



U.S. Department
of Transportation
**Federal Aviation
Administration**

Small Airplane Directorate
Wichita Aircraft Certification Office
1801 Airport Road, Room 100
Wichita, Kansas 67209

January 25, 1999

Mr. Phil Straub
GARMIN International
1200 E. 151st St.
Olathe, KS 66062

Subject: GNS 430 Follow On Installation Approval

Reference: GARMIN Installation Memorandum dated January 25, 1999

Dear Mr. Straub:

We have reviewed your Installation Memorandum dated January 25, 1999, and concur with the contents.

The GNS 430 integrated navigation/communication system incorporates adequate internal switching, alerting and annunciation features within its display such that most typical installations will not require external switching or annunciation. Extensive evaluations were conducted during initial certification of the GNS 430 to verify the suitability of the switching, alerting and annunciation features of the system. External annunciation of GPS receiver mode, CDI source information, leg sequencing, loss of integrity (RAIM), message and waypoint alert are not required in most installations where the GNS 430 display is located in the center area of the vertical instrument panel. For most aircraft, a location in the center radio stack or other location on the pilot's panel within the normal field of view at a height suitable for normal viewing from the pilot's seated position will not require external switching or annunciators. This area is generally defined as between the airspeed indicator on the left, the center radio stack (or left side of dual center radio stack arrangements) on the right, and vertically such that it is not blocked by the glareshield on top and not below the instrument panel or blocked by throttles, control yoke, etc. on the bottom. Installations located outside of this area (i.e., in a center pedestal, on the opposite side of the aircraft from the pilot's station, on a tilt panel, behind throttles, etc.) may require external annunciators.

Sincerely,

C. Dale Bleakney
FAA Program Manager
Wichita Aircraft Certification Office

Appendix C. 400 Series RS-232 Aviation Data Format

C.1 ELECTRICAL INTERFACE

The output signals shall be compatible with RS-232C. Data shall be generated at 9600 baud with a word length of 8 bits, one stop bit, and no parity.

C.2 GENERAL OUTPUT FORMAT

The 400 Series RS-232 data shall have the following general format:

- STX - ASCII start-of-text character (02 hex)
- t1s - Type 1 output sentences (see following paragraphs for description)
- t2s - One or more type 2 output sentences (see following paragraphs for description)
- ETX - ASCII end-of-text character (03 hex)

C.3 OUTPUT SENTENCE TYPE 1

The Type 1 output sentences shall have the following general format:

- id - item designator (single ASCII alphabetic character)
- dddd - item data (1 to 10 printable ASCII characters)
- CR - ASCII carriage return character (0D hex)
- LF - ASCII line feed character (0A hex)*

Each Type 1 sentence shall be output by the 400 Series unit approximately once every second.

The track, desired track, and bearing to waypoint angles, and the magnetic variation are output according to the current mode of the 400 Series unit (automatic magnetic heading, magnetic variation computed at last known position; true heading, magnetic variation of E00.0°; or user-defined magnetic heading, magnetic variation as entered by user).

The following table describes the Type 1 output sentence item designator (id) and item data (dddd) fields. If data for these sentences is invalid or unavailable, dashes ("-") are used to fill in all non-blank character positions.

* The line feed character is not output if the RS-232 port is configured as "Avtn no alt".

Ident (1 byte)	Data (10 bytes)	Description
	1 2 3 4 5 6 7 8 9 0	
Z	a a a a a	Current GPS altitude in feet *
A	s d d m m h h	Current latitude, where: s - N (north) or S (south) dd - degrees mm - minutes hh - hundredths of minutes
B	s d d d m m h h	Current longitude, where: s - E (east) or W (west) ddd - degrees mm - minutes hh - hundredths of minutes
C	d d d	Track in whole degrees
D	s s s	Ground speed in knots
E	d d d d d	Distance to waypoint in tenths of nautical miles
G	s n n n n	Cross track error, where: s - L (left) or R (right) of course nnnn - error in hundredths of nautical miles
I	d d d d	Desired track in tenths of degrees
K	c c c c c	Destination waypoint identifier (will be blank filled on right if less than 5 characters in identifier)
L	d d d d	Bearing to destination waypoint in tenths of degrees
Q	s d d d	Magnetic variation, where: s - E (east) or W (west) ddd - tenths of degrees
S	- - - - f	Nav valid flag status, where: f - N (nav flagged) or - (nav valid)
T	- - - - -	Warnings status, only data transmitted are dashes (-). Used to indicate end of Type 1 sentences.
I (lower case Lima)	d d d d d d	Distance to destination waypoint in tenths of nautical miles.

* The altitude is not output if the RS-232 port is configured as "Avtn no alt".

C.4 OUTPUT SENTENCE TYPE 2

The 400 Series Type 2 output sentence shall have the following general format:

- id - item designator (3 ASCII characters)
- seq - sequence number (1 binary byte)
- wpt - waypoint identifier (5 ASCII characters)
- lat - waypoint latitude (3 binary bytes)
- lon - waypoint longitude (4 binary bytes)
- mvar - magnetic variation at waypoint (2 binary bytes)
- CR - ASCII carriage return character (0D hex)
- LF - ASCII line feed character (0A hex)

Each waypoint in the route being navigated by the 400 Series unit shall have a Type 2 sentence output by the 400 Series unit approximately once every second.

If no route is being navigated by the 400 Series unit (i.e., the active route is empty), the following Type 2 sentence will be output approximately once every second:

- id - item designator (3 ASCII characters; route sequence number is "01")
- seq - sequence number (1 binary byte; last waypoint flag is set; route sequence number is 1)
- CR - ASCII carriage return character (0D hex)
- LF - ASCII line feed character (0A hex)

The following table describes the Type 2 output sentence item designator (id), sequence number (seq), waypoint identifier (wpt), waypoint latitude (lat), waypoint longitude (lon), and magnetic variation at waypoint (mvar) fields.

Field	Byte	Format 7 6 5 4 3 2 1 0	Description
id	1		ASCII character 'w' (77 hex)
	2-3		Two ASCII numeric characters representing route sequence number of waypoint (01 to 31)
seq	1	x l a n n n n n	x - undefined l - 1 if last waypoint in route a - 1 if active to waypoint nnnnn - route sequence number of waypoint (unsigned binary)
wpt	1-5		Destination waypoint identifier (will be blank filled on right if less than 5 characters in identifier)
lat	1	s d d d d d d d	s - 0 (north) or 1 (south) ddddddd - latitude degrees (unsigned binary)
	2	x x m m m m m m	xx - undefined mmmmm - latitude minutes (unsigned binary)
	3	x h h h h h h h	x - undefined hhhhhh - hundredths of latitude minutes (unsigned binary)
lon	1	s x x x x x x x	s - 0 (north) or 1 (south) xxxxxxx - undefined
		d d d d d d d d	ddddddd - longitude degrees (unsigned binary)
		x x m m m m m m	xx - undefined mmmmm - latitude minutes (unsigned binary)
		x h h h h h h h	x - undefined hhhhhh - hundredths of latitude minutes (unsigned binary)
mvar	1-2		Two's complement binary in 16ths of degrees. Easterly variation is positive. MSB output first.

Appendix D. 400 Series RS-232 Fuel/Air Data Input Format

D.1 ELECTRICAL INTERFACE

The input signals shall be compatible with RS-232C. Data shall be input at 9600 baud with a word length of 8 bits, one stop bit, and no parity. One message will be received per second.

D.2 SHADIN ALTITUDE SENTENCE

The GARMIN 400 Series units shall be capable of receiving the following 17-byte message from Shadin Altitude Encoders, Altitude Serializers, and Altitude Converters:

RMS<sp><+/->12345T<+/->12ul<CR>

Where:

RMS	ASCII characters
<sp>	space (0x20)
<+/->	sign indicator (0x2b["+"] or 0x2d["-"])
12345	altitude in feet
T	ASCII character
<+/->	sign indicator
12	sensor temperature
ul	checksum of bytes 1 through 14 in hex ASCII (i.e., "FA")
<CR>	carriage return (0x0d)

Note: Checksum is calculated by adding each byte in the message (1 through 14).

D.3 ICARUS ALTITUDE SENTENCE

The GARMIN 400 Series units shall be capable of receiving the following 10-byte message from the Icarus Altitude Serializer:

ALT<sp>12345<CR>

Where:

ALT	ASCII characters
<sp>	space (0x20)
12345	altitude in feet
<CR>	carriage return (0x0d)

D.4 SHADIN FUEL FLOW SENTENCE

The GARMIN 400 Series units shall be capable of receiving the following 55-byte message from the Shadin Fuel Flow Indicator:

<STX>K0543.2<sp>0100.0<sp>0040.0<sp>0060.0<sp>0123.4<sp>0045.4<sp>0078.0<sp>123<ETX>

Where:

- <STX> start-transmit character (0x02)
- K units designation (i.e., Gallons, Liters, Kilograms, B[pounds])
- 0543.2 total fuel remaining (i.e., ASCII-coded decimal format: 0x30, 0x35, 0x34, 0x33, 0x2e, 0x32)
- <sp> space (0x20)
- 0100.0 fuel flow rate, total (formatted as for total fuel remaining)
- 0040.0 fuel flow rate, engine one (or asterisks["*****"], in the case of single engine aircraft)
- 0060.0 fuel flow rate, engine two (asterisks, in the case of single engine aircraft)
- 0123.4 fuel used, total
- 0045.4 fuel used, engine one (asterisks, in the case of single engine aircraft)
- 0078.0 fuel used, engine two (asterisks, in the case of single engine aircraft)
- 123 checksum (of bytes 2 through 51)
- <ETX> end-transmit character (0x03)

Note: Checksum is calculated by adding each byte in the message (2 through 51), such that carries are discarded to give a one byte result. The ASCII-coded decimal representation of that byte is given, ranging from 0 (0x30, 0x30, 0x30) to 255 (0x32, 0x35, 0x35).

D.5 ARNAV / EI FUEL FLOW SENTENCE

The GARMIN GNC 400 shall be capable of receiving the following 13-byte message from the ARNAV or Electronics International ("EI") Fuel Flow Indicators:

<STX>G0245100550<ETX>

Where:

- <STX> start-transmit character (0x02 hex)
- G units designation (i.e., Gallons, Imperial gallons, Liters, Kilograms, B[pounds])
- 0245 total fuel remaining in reverse order (i.e., ASCII-coded decimal format: 0x30, 0x32, 0x34, 0x35)
- 1 fuel remaining checksum (modulo 10 sum of four "total fuel remaining" digits)
- 0055 total fuel flow rate in reverse order
- 0 fuel flow checksum
- <ETX> end-transmit character (0x03)

NOTE: Fuel remaining and fuel flow are [$\times 10$] when units designation is gallons or imperial gallons. For example, 0245 gallons indicates 542 gallons; 0245 liters indicates 5420 liters. Checksum is the modulo 10 sum of the four fuel flow decimal digits, converted to an ASCII numerical character (e.g., checksum for "5678" would be ASCII "6").

D.6 SHADIN FUEL/AIRDATA COMPUTER SENTENCE

The GARMIN 400 Series units shall be capable of receiving the following message strings from the Shadin Fuel/Airdata or Airdata Computer:

<STX>	
ZA012<CR><LF>	"ZA" (ASCII characters); "012" represents indicated Air Speed (knots)
ZB345<CR><LF>	"ZB" (ASCII characters); "345" represents true Air Speed (knots)
ZC678<CR><LF>	"ZC" (ASCII characters); "678" represents Mach Speed (thousandths)
ZD<+/->9012<CR><LF>	"ZD" (ASCII characters); sign; "9012" represents pressure altitude (tens of feet)
ZE<+/->3456<CR><LF>	"ZE" (ASCII characters); sign; "3456" represents density altitude (tens of feet)
ZF<+/->78<CR><LF>	"ZF" (ASCII characters); sign; "78" represents outside air temperature (Celsius)
ZG<+/->90<CR><LF>	"ZG" (ASCII characters); sign; "90" represents true air temperature (Celsius)
ZH123<CR><LF>	"ZH" (ASCII characters); "123" represents wind direction (degrees from north)
ZI456<CR><LF>	"ZI" (ASCII characters); "456" represents wind speed (knots)
ZJ<+/->78<CR><LF>	"ZJ" (ASCII characters); sign; "78" represents rate of turn (degrees per second)
ZK<+/->901<CR><LF>	"ZK" (ASCII characters); sign; "901" represents vertical speed (tens of ft/minute)
ZL234<CR><LF>	"ZL" (ASCII characters); "234" represents heading (degrees from north)
ZM5678<CR><LF>*	"ZM" (ASCII characters); "5678" represents fuel flow, right (tenths gallons/hour)
ZN90123<CR><LF>*	"ZN" (ASCII characters); "90123" represents fuel used, right (tenths gallons)
ZO4567<CR><LF>*	"ZO" (ASCII characters); "4567" represents fuel flow, left (tenths gallons/hour)
ZP89012<CR><LF>*	"ZP" (ASCII characters); "89012" represents fuel used, left (tenths gallons)
ZQ345<CR><LF>	"ZQ" (ASCII characters); "345" represents error log/reason indicator
ZR678<CR><LF>	"ZR" (ASCII characters); "678" represents checksum
<ETX>	

Where:

- <STX> start-transmit character (0x02)
- <CR> carriage-return character (0x0d)
- <LF> line-feed character (0x0a)
- <+/-> sign indicator (0x2b["+"] or 0x2d["-"])
- <ETX> end-transmit character (0x03)

*Not available from Airdata Computer

Note: Checksum is calculated by adding each byte in the message (including all characters from <STX> up to and including the error log/reason indicator), such that carries are discarded to give a one byte result. The ASCII-coded decimal representation of that byte is given, ranging from 0 (0x30, 0x30, 0x30) to 255 (0x32, 0x35, 0x35).

This page intentionally left blank.